

JCS26 U.S. PTO

09/199121

11/24/98

 UTILITY  
 PATENT APPLICATION  
 TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

M-3423-1C US

First Named Inventor or  
Application Identifier

Rossmann

Title

Method And Architecture For An Interactive Two-Way  
Data Communication Network

Express Mail Label No.

EM 26 30 38 04 2 US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO:

 Assistant Commissioner for Patents  
 Box Patent Application  
 Washington, D.C. 20231

- 1.
- ☒
- Fee Transmittal Form -
- see page 2 of this form.*
- 
- (Submit an original, and a duplicate for fee processing)

## 2. Application:

- ☒
- Specification: (preferred arrangement set forth below)

 Descriptive title of the Invention,  
 Cross References to Related Applications,  
 Reference to Microfiche Appendix,  
 Background of the Invention,  
 Brief Summary of the Invention,  
 Brief Description of the Drawings, and  
 Detailed Description (all totaling 124 pages)  
 Appendix(ces) \_\_\_, \_\_\_, & \_\_\_ (\_\_\_ pages)

- ☒
- Claim(s) 15 pages

- ☒
- Abstract of the Disclosure 1 page

- 3.
- ☒
- Drawing(s) (35 USC 113) [Total Sheets 37]

4. Oath or Declaration
- ☐
- unsigned [Total Pages 2]

- a.
- ☐
- Newly executed (original or copy)

- b.
- ☒
- Copy from prior application (37 CFR §1.63(d))
- 
- (for continuation/divisional with Box 17 completed)

- c.
- ☐
- DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b)

- 5.
- ☒
- Incorporation By Reference (useable if Box 4b is checked)

 The entire disclosure of the prior application, from  
 which a copy of the oath or declaration is supplied  
 under Box 4b, is considered as being part of the  
 disclosure of the accompanying application and is  
 hereby incorporated by reference therein.

- 6.
- ☒
- Microfiche Computer Program Appendix
- 
- consisting of 6 pages of microfiche containing 369
- 
- frames on each page in accompanying envelope.

7. Nucleotide and/or Amino Acid Sequence Submission
- 
- (if applicable, all necessary)

- a.
- ☐
- Computer Readable Copy

- b.
- ☐
- Paper Copy (identical to computer copy)

- c.
- ☐
- Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

- 8.
- ☐
- Assignment Papers (cover sheet & documents) \_\_\_ pages

- 9.
- ☐
- 37 CFR §3.73(b) Statement
- ☒
- Power of Attorney
- 
- (combined when there is an with Patent Declaration
- 
- Assignee) above.)

- 10.
- ☐
- English Translation Document (if applicable)

- 11.
- ☐
- Information Disclosure
- ☐
- \_\_\_ Copies of IDS
- 
- Statement (IDS) &
- ☐
- PTO-1449 Citations/References

- 12.
- ☒
- Preliminary Amendment 3 pages

- 13.
- ☒
- Return Receipt Postcard (MPEP 503)
- 
- (should be specifically itemized)

14. Small Entity Status

- ☐
- Small Entity Statement Enclosed \_\_\_ pages

- ☐
- Statement filed in prior application; and
- 
- status still proper and desired

- ☒
- Is no longer claimed.

- 15.
- ☐
- Certified Copy of Priority Document(s)
- 
- (if foreign priority is claimed)

- 16.
- ☐
- Other:

- ☐
- Copy of Petition for Extension of Time filed in parent appln.;

☐

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information and a preliminary amendment:

- ☒
- Continuation
- ☐
- Divisional
- ☐
- Continuation-in-part (CIP) of prior application No. 08/978,701

Filed on 11/25/97, entitled: A Method And Architecture For An Interactive Two-Way Data Communication Network.

PRIOR APPLICATION INFORMATION: Examiner Group Art Unit

## 18. CORRESPONDENCE ADDRESS

Customer Number or Bar Code Label

or ☒ Correspondence address below

Name

Edward C. Kwok

Reg. No. 33,938

Attorneys for  
Applicant

SKJERVEN, MORRILL, MacPHERSON, FRANKLIN &amp; FRIEL LLP

Address

25 Metro Drive, Suite 700

City

San Jose

State

CA

Zip Code

95110

Country:

United States

Telephone

(408) 453-9200

Fax

(408) 453-7979

Please type a plus sign (+) inside this box



PTO/SB/29 (1/98)

Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

### 19. Fee calculations.

CLAIMS (Number Filed)	(1) FOR	(2)		(3) NUMBER EXTRA		(4) RATE		(5) CALCULATIONS
7	TOTAL CLAIMS (37 CFR 1.16(c))	-20	=	0	x	\$18	=	\$ 0.00
1	INDEPENDENT CLAIMS (37 CFR 1.16(b))	-3	=	0	x	\$78	=	\$ 0.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.18(d))					+	\$260.00	= \$ 0.00
							BASIC FEE (37 CFR 1.16(a))	= \$760.00
							Total of above Calculations	= \$ 760.00
	Reduction by 50% for filing by small entity (Note 31 CFR 1.9, 1.27, 1.28).							= \$
							TOTAL	= \$ 760.00

20. **FEES:** The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. **19-2386**:

- a. ☒ Fees required under 37 CFR 1.16. (U.S. Application Filing Fees)
- b. ☒ Fees required under 37 CFR 1.17. (Conditional Extension of Time Fees)
- c. ☐ Fees required under 37 CFR 1.18. (Patent Issue Fees)

21. ☐ Other: \_\_\_\_\_


#### NOTE:

The prior application's correspondence address will carry over to this UPA UNLESS a new correspondence address is provided below.

### 22. NEW CORRESPONDENCE ADDRESS

Customer Number or Bar Code Label		New correspondence address below			
NAME					
ADDRESS					
CITY	STATE	ZIP CODE			
COUNTRY	TELEPHONE	FAX			

### 23. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

Skjerven, Morrill, MacPherson, Franklin & Friel LLP 25 Metro Drive, Suite 700 San Jose, CA 95110 Tel. (408) 453-9200 Fax. (408) 453-7979	
Date:	November 24, 1998
Name	Edward C. Kwok Reg. No. 33,938
Signature	
Express Mail Label No.	EM 26 30 38 04 2 US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Rossman, Alain  
Assignee: Unwired Planet, Inc.  
Title: METHOD AND ARCHITECTURE FOR AN INTERACTIVE TWO-  
WAY DATA COMMUNICATION NETWORK  
Serial No.: Unknown Filed: Herewith  
Examiner: Unknown Group Art Unit: Unknown  
Docket No.: M-3423-4C US

San Jose, California  
November 24, 1998

BOX PATENT APPLICATION  
ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D. C. 20231

**PRELIMINARY AMENDMENT**

Dear Sir:

Please amend the above-referenced patent application as follows:

IN THE SPECIFICATION

On page 1, insert before line 5 -- The present application is a continuation application of U.S. Patent application ("Parent Application"), serial no. 08/978,701, filed on, Nov. 25, 1997, Attorney Docket No. M-3423-1C US, entitled "A Method and Architecture for an Interactive Two-way Data Communication Network," assigned to Unwired Planet, Inc., which is also the Assignee of the present application. The Parent Application is a continuation application of U.S. Patent application, serial no. 08/570,210, filed on, Dec. 11, 1995, Attorney Docket No. M-3423 US, entitled "A Method and Architecture for an Interactive Two-way Data Communication Network," also assigned to Unwired Planet, Inc.--

IN THE CLAIMS

Please delete Claims 1-61.

Please add Claims 62-68 as follows:

--62. A method for a server, comprising:

receiving from a client device over a wireless link a request for access to a resource in a data network, said request comprising a resource locator and authentication information regarding said client device or a user of said client device;

determining if said authentication information sufficiently supports said request;

accessing said resource and receiving information resulting from said access;

generating a response to said request based on said information; and

transmitting said response to said client device over said wireless network.

63. The method of Claim 62, wherein said resource locator identifies a message to be accessed.

64. The method of Claim 63, wherein said message is provided in a markup language.

65. The method of Claim 62, wherein said response comprises a distillation of said message according to a set of predetermined rules.

66. The method of Claim 65, wherein said distillation comprises a compressed version of said message.

67. The method of Claim 63, wherein said message comprises one or more electronic mail messages received from said data network.

68. The method of Claim 63, said messages comprises a voice mail.--

REMARKS

Claims 1-61 are deleted. Claims 62-68 are newly presented for examination.

Claims 62-68 are believed patentable over the prior art of record.

If the Examiner has any questions regarding the above, the Examiner is respectfully requested to telephone the undersigned Attorney for Applicant at 408-453-9200.

Respectfully submitted,



Edward C. Kwok  
Attorney for Applicant  
Reg. No. 33,938

EXPRESS MAIL LABEL NO:  
EM 26 30 38 04 2 US

I hereby certify that this correspondence is being deposited with the United States Postal Service, express mail in an envelope addressed to:  
 Commissioner of Patents and Trademarks, Washington, D.C., 20231, on 12/11/95 Express Mail Receipt No. 12/11/95

IBS94710025US

12/11/95  
 Date of Signature

*Alain Rossmann*

# A METHOD AND ARCHITECTURE FOR AN INTERACTIVE TWO-WAY DATA COMMUNICATION NETWORK

Alain Rossmann

## 5 CROSS REFERENCE TO MICROFICHE APPENDIX

Appendix A, which is a part of the present disclosure, is a microfiche appendix consisting of six sheets of microfiche having a total of 369 frames. Microfiche Appendix A is a listing of one embodiment of the client module of this invention, which is described more completely below, and a server, as described more completely below, to communicate and interact with the client module of this invention.

A portion of the disclosure of this patent document contains material, that includes, but is not limited to, Microfiche Appendix A, Appendix I, Appendix II, and Figures 10A to 10T, which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent files or records, but otherwise reserves all copyright rights whatsoever.

## 25 BACKGROUND OF THE INVENTION

### Field of the Invention

This invention relates generally to data communications, and in particular to two-way data communication devices including a cellular telephone, a two-way pager, and a telephone that permit a user to interface with and interact with a server on a computer network.

### Description of Related Art

For at least the last five years, the wireless communication industry has tried to merge computing

with wireless communications. This industry wide effort has held the promise of bringing software intelligence to telecommunication devices including mobile wireless communications devices such as cellular telephones and two-way pagers as well as standard telephones.

After years of research and development, and hundreds of millions of dollars' investment by some of the largest companies in the field such as Motorola, AT&T, Sony, Matsushita, Phillips and IBM, the results have been nothing but disappointing. Typically, the intelligent communication devices resulting from these efforts include both the hardware necessary for a computer module and the hardware for a wireless communications module. Examples of such products are Simon from IBM and Bell South, MagicLink from Sony, and Envoy from Motorola.

Fundamental design and cost problems arising directly from the approach taken by the designers of these intelligent communication devices have limited widespread market acceptance of these devices. The combination of a wireless communication module with a computing module leads to a device that is too bulky, too expensive, and too inflexible to address the market requirements.

The combination of the two modules is too large and too heavy to fit in a user's pocket. Pocket size is a key requirement of the mobile communication market which remains unmet by these devices

In addition, the cost of these devices is close to the sum of the cost of the computer module and of the communications module, which is around a one thousand dollar end-user price. Market research indicates that the market for intelligent wireless communications devices is at prices around \$300. Even with a 20% compound cost decline, it would take five years for the

combination units to meet today's customers' price requirements. It is therefore unlikely that devices designed by combining a computer and a wireless module, no matter how miniaturized and cost reduced, can  
5 satisfy the cost requirement of the market during this decade.

To succeed in the market place, intelligent wireless communication devices must be able to support a wide variety of applications specific to each market  
10 segment. Typically, these applications must be added to the device by the end-user after purchase. Thus, the device must provide a method for loading the initial application and for subsequent updating of the application.

15 The price sensitivity for intelligent communication devices and the size limitations means that an intelligent communication device cannot support the amount of core memory (RAM), a hard disk or non-erasable memory, or a traditional floppy disk drive,  
20 commonly found on computers. These limitations close the traditional routes for delivering new applications or updates to intelligent communications devices.

As a result, the current crop of intelligent communication devices run only the few applications  
25 which were burned into their ROMs at the factory or which are contained in a ROM card plugged into a slot designed for this purpose. This scheme lacks the flexibility needed to run the thousands of applications required to address the fragmented requirements of the  
30 market and provides no simple method for updating the applications after the device has been sold.

Two other communication oriented attempts at bringing intelligence to telephones are Short Messaging Service (SMS) and Analog Display Service  
35 Interface (ADSI). SMS specifies how messages are delivered to and from a cellular telephone and how the



cellular telephone should store the messages. SMS also defines some simple processing which the cellular telephone can perform on the message, such as calling a telephone number embedded in the message.

5       SMS's architecture is similar to that of paging networks with the difference that devices implementing the SMS architecture operate over the control channel of the cellular telephone network. SMS is deployed primarily in Europe over the GSM network.

10       SMS messages are not delivered in real time. The time delays can range from 30 seconds up to 10 minutes, which makes SMS unsuitable for real time applications. The main purpose of SMS is the delivery of messages. SMS does not specify an application protocol or  
15       cellular telephone application module which further restricts its usefulness in running applications on cellular telephones. After a few years of deployment in Europe, SMS implementations have been limited to notification services such as two-way paging and voice  
20       mail notification.

      SMS as a medium is unsuited to building applications which allows the retrieval, manipulation, and storage of information. This is the reason why the industry giants have not turned to SMS in their quest  
25       to add intelligence to cellular telephones, but have consistently attempted to combine a computer module with a wireless communications module.

      ADSI was designed as an extension to Interactive Voice Response Systems. ADSI allows a smart telephone  
30       with a small screen to display prompts to assist users in choosing among various options. By using visual prompts instead of cumbersome voice prompts, ADSI is thought to make the use of interactive voice services easier and faster.

35       ADSI allows data to be sent from the service provider to the telephone in the form of screens. ADSI

also allows the telephone to respond through touch tone signaling with a special coding to describe the full alphanumeric character set. With ADSI, a telephone is primarily a passive device. Services send text screens to the telephone, and the telephone sends back short strings indicating the choices the user made from the text screen.

ADSI makes no provisions for performance of processing in the telephone. As a result, ADSI generates a high traffic load on the telephone network since each user input is sent back to the service for processing. This makes ADSI unsuitable for wireless networks where bandwidth is at a premium and "air efficiency" is one of the most sought after qualities. The lack of processing capability in the telephone and the high bandwidth requirements of ADSI have prevented it from being considered by the industry for implementing intelligent wireless devices.

Up to now, intelligent communication devices have combined a computing module with a wireless communications module. However, to gain widespread acceptance, a two-way data communication device with processing capability and the ability to run a wide variety of differing user applications is needed. In addition, such a device should be comparable in size, cost, and weight to a cellular telephone.

#### SUMMARY OF THE INVENTION

According to the principles of this invention, the prior art limitations of combining a computer module with a wireless communication module have been overcome. In particular, a two-way data communication device of this invention, such as a cellular telephone, two-way pager, or telephone includes a client module that communicates with a server computer over a two-way data communication network. The principles of this

invention can be used with a wide variety of two-way data communication networks. For example, two-way data communication networks for cellular telephones that may be used include a cellular digital packet data network as well as TDMA, CDMA, and GSM circuit switched data networks; and the AMPS analog cellular network with a modem. Similarly, for two-way pagers, two-way data communication networks include PACT, the new AT&T endorsed two way paging standard, or other priority two-way paging networks with data transport capability. The two-way data communication network for a telephone is the public switched telephone network.

Using the two-way communication device that includes the client module, a user can provide information to the server computer, retrieve information from the server computer, provide data to an application on the server computer which uses the data and provides information to the two-way communication device, or sends the information to another location. The functionality provided to the user of the two-way communication device is limited only by the applications available on a server computer that is accessible to the user over the two-way data communication network.

This invention allows for the first time two-way communications devices such as cellular telephones, two-way pagers, and telephones to become open application platforms which in turn empowers software developers to deliver value-added applications and services to any two-way communication device that incorporates the principles of this invention. This is a radical shift from the current situation where telephones and two-way pagers are closed, proprietary systems. Consequently, an even playing field is created for the market to invent new uses for two-way communication devices and for two-way communication

networks. Any entity from corporations to individuals can make new applications available to the installed base of two-way data communication devices that include this invention without physical modification or  
5 addition to the two-way communication device. Years after purchase, a two-way communication device incorporating this invention will run all the applications which were developed since its purchase.

Further, all these applications are available  
10 without the end user having to add anything or make any modification to the two-way communication device. Also, the applications are independent of the two-way data communication network. The applications do not depend on any feature of the two-way data communication  
15 network. Thus, the applications are unaffected by a change in the two-way data communication network.

Also, the applications on the server computer are independent of the two-way data communication device with which the server computer is interacting. An  
20 application on the server computer can communicate with any two-way data communication device that includes the client module of this invention and a network interface module to transmit data over, and receive data from the two-way data communication network. These two features  
25 mean that an investment in developing an application is insulated from either advances in two-way data communication devices, or advances in two-way data communication network technology.

As indicated above, the two-way data communication  
30 device of this invention utilizes a client module to transmit a message including a resource locator selected by the user over the two-way data communication network to a server on a server computer on the computer network. For example, the computer  
35 network can be a corporate wide area network, a corporate local area network, the Internet, or any

combination of computer networks.

The server processes the message, i.e., executes the application addressed by the resource locator and transmits a response over the two-way data communication network to the two-way data communication device, which stores the response in a memory. The client module interprets the response and generates a user interface using information in the response. In one embodiment, the user interface includes at least one user data input option that is associated with a resource locator. In another embodiment, the user interface is a display.

The resource locator associated with the at least one user data input option can address any one of a wide variety of objects. In one embodiment, the resource locator associated with the at least one user data input option addresses an object on the server computer that transmitted the response. In another embodiment, the resource locator addresses an object on another server computer coupled to the two-way data communication network. In yet another embodiment the resource locator addresses an object stored in the two-way communication device.

When the user selects the at least one user data input option, the client module interprets the selection and if required, appends any input data to the resource allocator associated with the at least one user data input option. The client module transmits a message including the resource locator with any appended input data to the server computer. Alternatively, the resource locator with any appended data can be addressed to another server computer, or can address an object stored in the two-way communication device. If the resource locator addresses an object on a server computer, the client module provides the message to the network interface

module which in turn transmits the message over the two-way data communication network.

Thus, in this embodiment, the message originally transmitted to the two-way data communication device included all the information necessary for the client module to generate the user interface, to associate the user selection and any data entered with a particular resource locator, and to transmit the appropriate resource locator in a subsequent message. The client module includes an interpreter that processed the information in the message. Since the message included all the information needed by the client module, the server computer that transmitted the message retained no state information concerning the message. Consequently, the server computer is defined as a stateless server computer.

An important aspect of this invention is that the message includes all information necessary for the client module to generate the user interface and a particular user interface can be independent from other user interfaces. Unlike prior art systems that gave the user a predetermined menu from which to select items, or limited the user to an E-mail like format, according to the principles of this invention, the user interfaces and possible interactions available to the user are determined only by the applications that developers make available. The possible interactions and user interfaces for one application can be totally different and independent from the possible interactions and user interfaces of another application. Thus, a cellular telephone, two-way pager, and a telephone all truly become an open platform.

These features of the invention are a significant departure from prior art systems. Typically, in the prior art, use of a particular application on a

particular platform required that the application be compatible with the operating system on that platform. Further, each time a new version of the application was released, the user was required to take steps to update the application on the user's platform. Further, if the user of the platform did not modify the operating system as new versions of the operating system were released, at some point in time, the platform would no longer be capable of processing a new version of an application that required a current version of the operating system.

This invention eliminates these problems. As explained above, the client module in the two-way data communication device functions as an interpreter. The application on the server computer provides all information necessary for the interpreter to generate a user interface on the two-way data communication device, and in response to user selections or data input using the user interface, to route messages to an appropriate server, i.e., either the server that sent the original information or another server.

Thus, the client module only interprets this information and interacts appropriately with the hardware of the two-way data communication device. Consequently, to update an application requires only changes on the server computer and not changes in each two-way data communication device that communicates with that server computer. This invention eliminates the usual requirement for distribution of application software, and application software updates to the end user of the two-way data communication device.

In one embodiment, a two-way data communication system for communication between a server computer and a two-way data communication device selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, includes a two-way data

communication network, a server computer coupled to the two-way data communication network, and a two-way data communication device coupled to the two-way data communication network. The server computer includes a two-way data communication interface module coupled to the two-way data communication network, and a server coupled to the two-way data communication interface module. The server receives a message including a resource locator from the two-way data communication network. The resource locator includes an address of the server computer and of an application on that server computer. The server processes the message using the resource locator. In this embodiment, the server transmits a response to the message over the two-way data communication network.

The two-way data communication device, selected from the group consisting of a cellular telephone, a two-way pager, and a telephone, includes a network interface module coupled to the two-way data communication network, and a client module coupled to the network interface module. The client module transmitted the message including the resource locator to the server over the two-way data communication network. The client module also processes the response to the message from the server. The response includes information for a user interaction over the two-way data communication network.

The client module of this invention is lightweight, and thus requires only lightweight resources in a two-way data communication device. Consequently, the client module can use existing resources in such a device and therefore does not add to the cost of the two-way data communication device.

In one embodiment, the interpreter within the client module includes a plurality of managers including a user interface manager coupled to a display



of the two-way data communication device where the user interface manager handles interactions with the display. The user interface manager also is coupled to a keypad of the two-way data communication device and  
5 handle interactions with the keypad. Herein, a keypad can be a telephone keypad, the keys found on a two-way pager, or other data input interface of a two-way communication device.

In one embodiment, the response generated by the  
10 server computer includes a plurality of resource locators and at least one of the plurality of resource locators includes an address to another server coupled to the communication network.

According to the principles of this invention, a  
15 method for using a two-way data communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer includes:

generating a message by a client module in  
20 response to data entered by the user of a two-way data communication device coupled to a two-way data communication network,

wherein the client module executes on a microcontroller of the two-way data  
25 communication device; and

the message includes a resource locator;  
transmitting the message over the  
two-way data communication network to a  
server computer wherein the server  
30 computer is identified by the resource locator;

executing an application on the server computer identified by the resource locator to generate a response to the message; and

35 transmitting the response to a location identified by the application.

As indicated above the location can be the two-way communication device, another server computer, or some other device coupled to the server computer.

5    BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates one embodiment of the airnet network of this invention that includes the two-way data communication devices of this invention.

10    Figures 2A to 2H are illustrations of a series of screen displays of the two-way data communication device of this invention that illustrate one application of the principles of this invention.

15    Figures 3A to 3F are illustrations of a series of screen displays of the two-way data communication device of this invention that illustrate a second application of the principles of this invention.

20    Figures 4A to 4I are illustrations of a series of screen displays of the two-way data communication device of this invention that illustrate yet another application of the principles of this invention.

25    Figure 5 illustrates another embodiment of the airnet network of this invention that includes the two-way data communication devices of this invention and an airnet network translator.

30    Figure 6 is a block diagram of a mobile wireless communication device that includes the client and support modules of this invention.

35    Figure 7 is a more detailed diagram of the mobile wireless communication device and a server computer within the airnet network architecture of this invention.

Figures 8A to 8D are a process flow diagram showing the process performed by the client in the mobile wireless communication device and the server on the server computer of Figure 7.

Figure 9 is a diagram of a mobile wireless

communication device of this invention that includes a novel predictive text entry system that is a part of this invention.

Figures 10A to 10T are one embodiment of a letter frequency table.

Figure 11 is a process flow diagram for one embodiment of a data entry process that includes the novel predictive data entry process of this invention.

Figure 12 is a more detailed diagram of the mobile wireless communication device and the airnet network translator within the airnet network architecture of the another embodiment of this is invention.

Figure 13 is a process flow diagram showing the various processes performed by the airnet network translator of Figure 12.

Figure 14 is a diagram illustrating the various module managers included in one embodiment of the client module of this invention.

Herein, objects with the same reference numeral are the same object. Also, the first number of a reference numeral indicates the Figure where the object first appeared.

#### DETAILED DESCRIPTION

According to the principles of this invention, a novel airnet network 150, i.e., a two-way data communication network, interconnects any one, any combination, or all of two-way data communication devices 100, 101, or 102, that each include this invention, with a wide variety of computer networks 120, 130, and 140, for example. As explained more completely below, each two-way data communication device 100, 101, and 102 can be configured to transmit data to and receive data from any desired combination of computers on computer networks 120, 130, and 140. Airnet network 150 is the two-way data communication

path from the two-way data communication device to the particular computer that is accessed by the user of that two-way data communication device.

Each wireless communication device 100 that  
5 includes this invention can communicate over airnet network 150 with any server computer 121, 131, and 141 on airnet network 150 that includes at least one application that communicates and interacts with the processes of this invention that are included within  
10 device 100. Thus, device 100 can access information on the computer network and provide information to the computer network. Similarly, a two-way pager 101, and a telephone 102 with a modem 103, that each include this invention, can communicate over airnet network 150  
15 with any of server computers 121, 131, and 141 that includes at least one application that communicates and interacts with the processes of this invention that are included within devices 101 and 102.

As explained more completely below, an application  
20 on a server computer can be accessed by any two-way data communication device that can communicate with that server computer. The application is independent of the particular type of two-way data communication device that is used to access the application and  
25 independent of the particular two-way data communication network used. This means that a user can access an application from anywhere so long as the user has a two-way data communication device that can communicate with the server computer.

30 In one embodiment, a process on wireless communication device 100 is configured as a client process and the applications on server computers 121, 131 and 141 on airnet network 150, that communicate with the client process, are server processes. This  
35 architecture allows some of the processing burden to be moved away from cellular telephone 100, across airnet

network 150, to a server module on any computer on  
airnet network 150.

Specifically, a wireless communication device 100  
e.g., a cellular telephone, with a telephone like  
5 keypad, communicates via a data capable cellular  
telephone network 110, e.g., a cellular digital packet  
data telephone network, with an application on a server  
computer on a computer network that has an interface to  
data capable cellular telephone network 110. For  
10 example, the computer network can be a corporate wide  
area network 120, a corporate local area network 130,  
or perhaps the Internet 140.

Similarly, a two-way pager 101 communicates via a  
two-way pager network 111 with an application on a  
15 server computer on a computer network that has an  
interface to two-way pager network 111. Again, for  
example, the computer network can be a corporate wide  
area network 120, a corporate local area network 130,  
or perhaps the Internet 140. Finally, a telephone 102  
20 communicates via a modem 103 and public switched  
telephone network 112 with an application on a server  
computer on a computer network that has an interface to  
public switched telephone network 112. As with the  
other two-way data communication devices, the computer  
25 network can be, for example, a corporate wide area  
network 120, a corporate local area network 130, or  
perhaps the Internet 140.

In each of two-way data communication devices 100,  
101, and 102, the client process is stored as a client  
30 module in the device and the execution of the client  
module on a microcontroller in the device is sometimes  
referred to as the client process. The client process  
performs important processing functions locally. This  
allows the communication between the client process,  
35 hereinafter sometimes referred to as simply client, and  
the server process, hereinafter sometimes referred to

as server, to be minimized and the server computing requirements to grow slowly as the number of clients, i.e., users, grows.

5 The client module is small, e.g., under 64 KByte, and requires only low processing power congruent with the memory chips and built-in microcontrollers in two-way data communication devices such as cellular telephone 100, two-way pager 101, and telephone 102. Thus, unlike the prior art attempts at an intelligent  
10 telephone, the cost, size, and battery life of either cellular telephones, two-way pagers, or telephones that incorporate this invention are not adversely affected.

While client/server architectures have been used extensively in computer networks, a client/server  
15 architecture implemented using two-way communication data devices such as cellular telephone 100, two-way pager 101, or telephone 102 yields new and unexpected results. This invention allows for the first time a wide variety of two-way data communication devices  
20 including but not limited to cellular telephones, two-way pagers, and telephones to become open application platforms which in turn empowers software developers to deliver value added applications and services to any two-way data communication device which incorporates  
25 the principles of this invention.

This is a radical shift from the current situation where cellular telephones, two-way pagers, and telephones are closed, proprietary systems. Consequently, an even playing field is created for the  
30 market to invent new uses for cellular telephones and data capable cellular networks, for two-way pagers and two-way pager networks, and for telephones on the public switched network.

Any entity from corporations to individuals can  
35 make new applications available to the installed base of data ready cellular telephones, two-way pagers, and

telephones, that include this invention without physical modification or addition to the devices. Years after purchase, a two-way data communication device with this invention can run all the applications which were developed since its purchase. Further, all these applications are available without the user having to add anything or make any modification to the two-way data communication device. These features of the invention are a significant departure from prior art systems. Typically, in the prior art, use of a particular application on a particular platform required that the application be compatible with the operating system on that platform. Further, each time a new version of the application was released, the user was required to take steps to update the application on the user's platform. Further, if the user of the platform did not modify the operating system as new versions of the operating system were released, at some point in time, the platform would no longer be capable of processing a new version of an application that required a current version of the operating system.

Also, small devices, such as cellular telephones or pagers, usually do not have card slots, floppy or hard disk drives, or other means commonly found on computers to add or update applications. This limitation has led prior art attempts at intelligent communication devices to design closed systems with fixed functionality. Such devices can neither adapt nor be adapted to the fast changing requirements of the market place and so have not met with market success.

This invention eliminates these problems. The client process in the two-way data communication device functions as an interpreter. The application on the server computer provides all information necessary for the interpreter to generate a user interface on the two-way data communication device, and in response to

user selections or data input using the user interface, to route messages to an appropriate server, i.e, either the server that sent the original information or another server.

5           Thus, the client process only interprets this information and interacts appropriately with the hardware of the two-way data communication device. Consequently, to update an application requires only changes on the server computer and not changes in each  
10 two-way data communication device that communicates with that server computer. This invention eliminates the usual requirement for distribution of application software, and application software updates to the end user of the two-way data communication device.

15           For example, if initially, two-way pager 101 receives a response to a message from an application on server computer 121 on corporate wide area network 120, the interpreter in two-way pager 101 generates a user interface on display screen 106 using information in  
20 the message. As described more completely below, options presented in the user interface can allow the user to access information, or provide information to any one, any combination of, or all of networks 120, 130, and 140.

25           Specifically, in the response to the message from two-way pager 101, the application initially accessed on server computer 121 included resource locators for applications on each of networks 120, 130, 140, typically common gateway interface programs, accessible  
30 to the user of pager 101 as well as information required to generate the user interface. Consequently, when the user makes a particular selection or enters data, the interpreter accesses the appropriate resource locator and appends any necessary data to the resource  
35 locator. The client transmits a message including the resource locator to the appropriate server.



As shown by this example, the applications on networks 120, 130, 140 send to the two-way data communication device all information necessary to generate a user interface, and to process all user  
5 input. Consequently, only an application must be changed to update the information provided to the two-way data communication device.

In addition, since all the information needed by the client to generate a user interface and all  
10 information necessary for the client process to respond to any input data is included in the message, the computer server does not retain any state information concerning the information transmitted to the client process. Consequently, the computer server is  
15 stateless.

Each two-way data communication device 100, 101, and 102 that utilizes airnet network 150, includes a data communication capability, a display screen, preferably a multi-line display screen, and storage  
20 capability for the processes of this invention in an on-board memory, and for the message being processed. Nearly every data capable cellular telephone, e.g., a telephone that utilizes a cellular digital packet data network, includes excess on-board memory capacity and a  
25 multi-line display screen. These hardware resources are often available, but unused in a data capable cellular telephone because of the indivisibility of memory chip packages. The inclusion of the processes of this invention in such cellular telephones therefore  
30 has very little effect on the cost, size, and power consumption of the cellular telephone. Similarly, the inclusion of the processes of this invention in two-way pagers and telephones, that include a microcontroller and memory, has very little affect on the cost, size,  
35 and power consumption of these devices.

Thus, unlike prior art approaches that attempted

to combine a computer module and a wireless communication module in a single package, this embodiment of the invention preferably utilizes the memory and processing power that currently exists in the cellular telephone 100, two-way pager 101, telephone 102 or other wireless or landline two-way data communication devices. This approach limits the cost of the resulting device and overcomes many of the problems of the prior art devices, e.g., the size and weight of the two-way data communication device is not changed, and, as explained above, updating user applications is removed from cellular telephone 100, two-way pager 101, and telephone 102.

In particular, unlike devices produced by previous industry attempts at combining computing modules and a wireless cellular module, two-way data communication devices which incorporate this invention are size and cost competitive with voice-only telephones and can, for the first time, satisfy the market cost and size requirements for an intelligent cellular telephone, for example.

The incremental cost of supporting interactive applications on cellular telephone 100, two-way pager 101, and telephone 102 is reduced to at most a slightly larger screen that is required to display the application to the user. This is a fraction of the cost of adding a complete computer module to a cellular telephone, for example.

The incremental power consumption required to support this invention is also very small, as the incremental memory and screen required are small consumers of power compared to the cellular radio itself. Intelligent two-way data communication devices built according to the principles of this invention are not expected to have a significantly lower battery life than standard cellular telephones, or two-way pagers,

for example.

5 The configuration and processes of the client  
process in two-way data communication devices 100, 101,  
and 102 are similar when the differences in the devices  
and the two-way data communication network over which  
the devices communicate are considered. Consequently,  
in the following description, the operation of data-  
ready cellular telephone 100 is considered. The same  
or similar operations can be performed on two-way data  
10 communication devices 101, and 102. The main  
difference is that some device dependent features  
within the client module must be changed to accommodate  
the particular hardware used in the two-way  
communication device. However, the client module  
15 architecture described more completely below limits the  
number of changes that must be made.

As indicated above, in response to user actions,  
wireless communication device 100 transmits a message,  
typically a data request, to a server computer 121 on  
20 computer network 120 and receives a response to the  
message. Alternatively, the user action can result in  
directions to server computer 121 on computer  
network 120 to transmit the response to the message to  
another location or to another user. Also, wireless  
25 communication device 100 can receive a message from any  
one of the computers coupled to airnet network 150.

An important aspect of this invention is that the  
client module interpreter in wireless communication  
device 100 generates a user interface by which the user  
30 can both initiate and receive messages from a variety  
of applications. The interactions take place in real-  
time and are not limited by the client module  
interpreter. The uses of wireless communication  
device 100 are limited only by the availability of  
35 applications on server computers.

The applications available are determined by

application developers. Prior to considering one implementation of the invention in further detail, several illustrative examples of applications that can be implemented according to the principles of this invention are described. These applications are illustrative only and are not intended to limit the invention to the particular applications and features described.

In one use, the user configures cellular telephone 100 to access server computer 121 on XYZ corporate wide area network 120. In response to the access by the user, server computer 121 transmits a card deck to cellular telephone 100 over data capable cellular telephone network 110. As explained more completely below, a card deck includes one or more cards, and each card is interpreted by the client module to generate a user interface screen.

In the embodiment illustrated in Figure 2A, the initial card deck transmitted to cellular telephone 100 includes an introductory display card and a choice card. Figure 2A is an example of introductory screen display 200 that is generated on display screen 105 by the client process in cellular telephone 100 by interpreting the display card. As used herein, a display screen is the physical display apparatus in a two-way communication device. A screen display is the image presented on the display screen.

In this embodiment, display screen 105 is a pixel display that displays graphics. In another embodiment, display screen 105 displays only text and so the graphics would not appear on display screen 105. Screen display 200, and other screen displays described more completely below, include a horizontal arrow, i.e., a multi-card deck indicator, to communicate to the user that the current deck includes another card. The inclusion of screen indicators, such as the multi-

card deck indicator, to communicate with the user is optional. The functionality of this invention is independent of such screen indicators.

When the user presses a predetermined key, or key  
5 sequence, the client process in cellular telephone 100  
interprets the next card in the card deck, i.e., the  
choice card, and in turn generates a menu 201 (Fig. 2B)  
of items that can be accessed by the user. In this  
embodiment, each of the menu items is available on  
10 server computer 121 to the user who, in this example,  
is a representative of XYZ corporation visiting ABC  
Designs.

As explained more completely below, each of the  
menu items is associated with a resource locator that  
15 includes an address of the particular object associated  
with that menu item, typically an address to a common  
gateway interface program on server computer 121. In  
general, a resource locator includes an address and may  
include appended data. The address can be to a local  
20 object within the two-way data communication device or  
to a remote object on a server computer. As is known  
to those skilled in the art, the common gateway  
interface is an Internet standard that is used to  
dynamically generate information, e.g., cards. In view  
25 of this disclosure, other techniques to generate  
dynamic cards could be used.

Initially, the highlighting of the first line of  
menu 201 is not present. When a key on the keypad of  
cellular telephone 100 is pressed, the menu item  
30 corresponding to that key is highlighted on screen 105.  
Thus, menu 201 shows the first item highlighted to  
indicate that the one key was pressed by the user.  
However, highlighting a selected item is a feature that  
is specific to this example, and in general is not  
35 required to implement the invention. Other methods can  
be used to indicate the user's choice on display

screen 105 such as an arrow pointing at the choice, if such an indication is desired.

After the one key is pressed, the user presses a predetermined key, e.g., an enter key, to verify the selection. Alternatively, in another embodiment, the verification of the selection is not required. In both embodiments, the resource locator for the selection is transmitted to server computer 121 by the client process in cellular telephone 100 over data capable cellular telephone network 110. In response to the selection, server computer 121 processes the message containing the selection, and in this embodiment, transmits another card deck to cellular telephone 100.

The client process in cellular telephone 100 interprets the first card in the deck received from server computer 121, which is a choice card, and generates a screen display 202, that includes a second menu as illustrated in Fig. 2C, on display screen 105. Initially, none of the items in the second menu are highlighted.

Notice that screen display 202 includes a header, that describes the selection made by the user on screen display 201, in addition to the second menu of choices available to the user. A multi-display screen card indicator 203, e.g., in this embodiment, a hand icon with a finger pointing down, shows that the screen associated with the current choice card includes additional items that are not shown on display screen 105. Herein, a screen can be larger than the number of lines available on display screen 105 and so the user must scroll the screen display to view the complete screen.

Thus, to view the additional items, the user presses a first screen scroll key, e.g., a next key, on cellular telephone 100. In this embodiment, when the first screen scroll key is pressed, each line of the

display is rolled up one line. The resulting display has an icon with a finger pointing up (not shown) if the menu requires only two screen displays. If the menu requires more than two screen displays, the second  
5 screen display of the menu would have two icons, one with a finger pointing up, and another with a finger pointing down. To scroll between the various lines in the second menu, the user uses the first screen scroll key, and a second screen scroll key.

10 If the user displays the last line of a card, e.g., the last line in the second menu, and presses the first screen scroll key nothing happens. In this embodiment, the user must make a choice before the next card is available.

15 Screen display 202 also includes representations of two soft keys, a home key 204, and an info key 205. In this example, these soft keys are defined only for the card used to generate screen display 202. When the user presses a predetermined key sequence, the home key  
20 is highlighted to indicate the selection. In this embodiment, when the home key is selected, the user is returned to screen display 200. In another embodiment, the user could be returned, for example, to a home screen display that is displayed each time the user  
25 activates cellular telephone 100 for use on airnet network 150.

The home key is associated with a pointer, that in one embodiment is a resource locator, and the card addressed by the pointer is displayed by the client  
30 process when the home key is selected by the user. Specifically, if the pointer is to a card in the current deck, the client process simply displays that card. If the pointer is to other than a card in the current deck, the client process in cellular  
35 telephone 100 retrieves the deck containing the card at the location identified by the pointer. The location

could be, for example, either a memory in cellular telephone 100, or a memory in computer 121.

Similarly, when the user presses another predetermined key sequence, the info key is highlighted to indicate the selection. In this embodiment, when the info key is selected, a help screen is displayed for the user that describes the possible selections. The particular contents of the help screen are determined by the provider of the service.

Specifically, a pointer is associated with the info key and when the info key is depressed by the user, the information stored at the location identified by the pointer is retrieved and interpreted by the client process in cellular telephone 100.

Returning to the menu in Figure 2C, since the user wants to determine the status of an order, the user pushes the two key on the keypad of cellular telephone 100. In response to the key press, the second choice in the menu is highlighted as shown in Figure 2C. In response to verification of the key press, e.g., the user presses a predetermined key sequence, cellular telephone 100 transmits a check open order request to computer 121, i.e, the client process transmits a message that includes a resource locator associated with the menu item selected by pressing the two key.

In response to the check open order request, computer 121 transmits yet another card deck to cellular telephone 100. The client process in cellular telephone 100 interprets this deck, that is an entry card, and in turn generates a purchase order number entry screen display 206 (Fig. 2D) on display screen 105. Notice that screen display 206 has a previous soft key 207 and a fax soft key 208. Again, each of these soft keys has an associated pointer and the information stored at the location identified by



the pointer is retrieved and interpreted by the client process when the user selects the soft key.

In this example, the user does not select a soft key, but rather the user enters the purchase order number as shown in Figure 2E using the keypad of cellular telephone 100. The user enters only the various numbers. The client process formats the number and inserts the dashes as shown in Figure 2E.

After the purchase order is entered, the user presses a predetermined key sequence to indicate to the client process that entry of the purchase order number is complete. Notice that the user is entering data and not simply selecting a menu item. The user is utilizing cellular telephone 100 as if cellular telephone 100 was a computer connected to network 120, but, as explained more completely below, cellular telephone 100 is similar to a standard digital data capable cellular telephone that communicates over data capable cellular telephone network 110. Specifically, cellular telephone 100 is not a combination of a computer module and a wireless communication module as in prior art attempts to create an intelligent telephone.

In addition, the user enters data using only the standard cellular telephone keypad. Thus, cellular telephone 100 eliminates the need for a computer keyboard or for a sophisticated touch screen that recognizes motion of a pointing object. This is important to maintaining the size, weight, and power requirements of cellular telephone 100 similar to those of a voice-only cellular telephone. In one embodiment, to facilitate data entry, as explained more completely below, cellular telephone 100 includes a text prediction process that reduces the number of key strokes required to enter text data. In this embodiment, the text prediction process is turned on or

off for each entry card.

In response to entry of the purchase order number, the client process transmits a request to server computer 121 for the particular purchase order.

5 Specifically, the client process appends the entered data to a resource locator and transmits a message containing the resource locator to server computer 121. Server computer 121, in response to the message, retrieves the appropriate purchase order and transmits  
10 the purchase order as a card deck to the client process in cellular telephone 100 over airnet network 150.

The client process interprets the card deck and generates a screen display 209 (Fig. 2F). Initially, fax key 208 is not highlighted in screen display 209.

15 Notice that screen display 209 includes multi-display screen card indicator 203 to show the user that the purchase order screen contains more information that can be displayed at one time on display screen 105.

20 After the user reviews the purchase order, the user presses the key sequence for fax key 208 and in response, fax key 208 is highlighted as illustrated in Figure 2F.

In response to selection of fax key 208, the  
25 client process retrieves the card deck at the location identified by the pointer associated with fax key 208. If the location is on server computer 121, the client process transmits a message including a resource locator to server computer 121 and in response to the  
30 message, server computer 121 transmits back yet another card deck. If the location is on a server computer other than server computer 121, the client process transmits a message including a resource locator to that server computer and in response to the message,  
35 that server computer transmits back yet another card deck. If the location identified by the pointer is

within cellular telephone 100, the client process simply retrieves the deck. In either case, fax form 210 (Fig. 2G), that is an entry card, is displayed on display screen 105 by cellular telephone 100. This example demonstrates the information accessed by the client process can be located in any number of locations. The resource locator associated with the fax key identifies the appropriate location.

When fax form 210 is displayed, the user enters the facsimile machine telephone number at ABC Designs, as shown in Figure 2H, using the cellular telephone keypad. In this embodiment, the telephone number is automatically formatted by the client process. After the telephone number is entered, the client process appends the telephone number to a resource locator and transmits the information to server computer 121.

When server computer 121 receives the information, server computer 121 executes a common gateway interface application (CGI) pointed to by the resource locator. The CGI application grabs the necessary information and transmits the information via e-mail to a fax gateway. The fax gateway, upon receipt of the e-mail, converts the information to a fax and sends the information to the specified telephone number. Thus, cellular telephone 100 requires neither a printer connection nor a print driver, but yet can print using the facsimile machine at ABC Designs.

As illustrated in this example, cellular telephone 100 transmitted a request for a particular purchase order, and scheduled transmission of data responsive to the request to a local machine capable of printing the data. Thus, the processes of this invention, as described more completely below, in cellular telephone 100 in combination with data capable cellular telephone network 110 and server computer 121 permit cellular telephone 100 to effectively utilize an

application on server computer 121 on network 120 even though cellular telephone 100 utilizes only a microcontroller found in telephone 100 and does not required a separate computer module as in the prior art.

In addition, the client process using the information transmitted from server computer 121, i.e, the cards, generates a wide-variety of user interfaces as illustrated in Figures 2A to 2H. The particular configuration of the various user interfaces is defined by the cards transmitted in a card deck. Consequently, the user interface is not fixed to one particular format such as an E-mail type format, but rather the format is variable and can be redefined by each card that is interpreted by the client process. Also, in general, the user interface for one application on a server computer is independent from the user interface for another application on that server computer.

Specifically, the application accessed on server computer 121 generates the card deck and so in turn defines each of the various user interfaces. Each user interface permits the user to identify a particular selection. Each particular selection could result in generation of a different user interface with different selections. Thus, the user interfaces are limited only by the applications accessible to the two-way data communication device.

As shown below, a wide variety of applications can be provided on a server computer. Despite the robustness of the client module in interpreting a wide variety of application, typically, the client process is lightweight and thus requires only lightweight resources, e.g., 60 Kbytes of read-only memory (ROM) for the client module, 10 Kbytes of random access memory (RAM), and less than one million instructions per second (MIPS) of processing power. Since the

client process needs only these lightweight resources in a two-way data communication device, the client can use existing resources in such a device and therefore does not add to the cost of the two-way data

5 communication device such as data capable cellular telephone 100.

In another embodiment, the user can configure cellular telephone 100 to access server computer 131 on corporate local area network 130. In response to the  
10 access by the user, computer 131 transmits a home card (not shown) to cellular telephone 100 which in turn generates a home screen display on display screen 105.

When the user selects personal information on the home screen display or on a subsequent screen display  
15 associated with the home card, a message including a resource locator for a personal information deck is transmitted from cellular telephone 100 to computer 131. In response to the message, computer 131 transmits a card deck that includes a display card and  
20 a choice card to cellular telephone 100. In these examples, the card deck is described as including one of three cards, a display card, a choice card, and an entry card. However, these examples are illustrative only, and are not intended to limit the invention to  
25 those particular embodiments of cards. In view of this disclosure, those skilled in the art will be able to form combinations of these types of cards and define other types of cards, if such cards are appropriate for the particular application.

30 The client process in cellular telephone 100 interprets the display card that includes image and text data and generates screen display 300 on display screen 105 (Fig. 3A). Screen display 300 includes a home key 301, and an info key 302. When the user  
35 selects home key 301, the user is returned to the home screen. Info key 302 functions in a manner similar to

that described above for info key 205.

When the user presses a predetermined key, the client process interprets the choice card and a second screen display 304 (Fig. 3B) is driven on display screen 105. Screen display 304 is a menu of the personal information that is stored on server computer 131 for use by the user of cellular telephone 100. Multi-display screen card indicator 203, e.g., the hand with a finger pointing down, illustrates to the user that the list has additional items that appear on the next screen display. Screen display 304 also indicates the number of E-mail messages, faxes, and voice messages waiting for the user.

The user scrolls the screen display line by line until screen display 305 is on display screen 105. Initially, the fourth item in the menu is not highlighted. In this example, the user presses the four key on the keypad of cellular telephone 100 to view the user's schedule. In response to the key press, the client module in cellular telephone 100 transmits a message, including a resource locator associated with the menu item selected by pressing the four key, to server computer 131 using data capable cellular telephone network 110 and corporate local area network 130.

In response to the message, server computer 131 executes the application identified in the resource locator. Upon completion of the execution, server computer 131 transmits, over corporate local area network 130 and data capable cellular telephone network 110 to cellular telephone 100, a card deck that includes a choice card that describes the user's schedule for that day.

In this embodiment, when server computer 131 completes the transmission, server computer 131 has

completed the response to the message and has transmitted all necessary information to cellular telephone 100. Therefore, server computer 131 does not retain any state information concerning the transmitted information and so is referred to as a stateless server computer 131. In this embodiment, the client process can only request a card deck. However, as demonstrated herein, card decks and the two-way interactive data communication system of this invention provide the user with a new level of capability.

When cellular telephone 100 receives the card deck, the client process in cellular telephone 100 interprets the choice card and drives screen display 306 (Fig. 3D) on display screen 105. Initially, the first item in the menu of screen display 306 is not highlighted. When the user depresses the one key on the keypad of cellular telephone 100, cellular telephone 100 highlights the first item in the menu. Cellular telephone 100 generates screen display 308 (Fig. 3E) upon the user subsequently depressing a predetermined key. Screen display 308 includes a schedule key 309, that when selected returns the user to screen display 306 (Fig. 3D). Screen display 308 also includes a more detailed description of the 10:00 a.m. meeting.

While screen display 308 is active, if the user depresses a predetermined key, the user is presented with the options in screen display 310 (Fig. 3F). Initially, item two in screen display 310 is not highlighted.

In this example, the user depresses key two on the keypad of cellular telephone 100 and so cellular telephone 100 sends a message including a resource locator to server computer 131 to send an E-mail message to Bill Smith confirming the meeting at 10:00

a.m. When server computer 131 executes the application addressed by the resource locator, an E-mail message is sent.

In another example, the user of cellular  
5 telephone 100 connects to Internet service provider computer 141 on Internet 140 using data capable cellular telephone network 110. Upon connection of cellular telephone 100, service provider 141 transmits to cellular telephone 100 a card deck to generate  
10 Figures 4A to 4C.

The client process in cellular telephone 100 interprets the first card in the card deck from computer 141 and generates screen display 400 (Fig. 4A). When the user presses a predetermined key,  
15 cellular telephone 100 displays screen display 401 (Fig. 4B). Screen display 401 provides the user with a series of choices that group services alphabetically.

When the user depresses the seven key on the keypad of cellular telephone 100, cellular  
20 telephone 100 displays a list of the services that have letters P, R, or S as the first letter in the service name. In this embodiment, screen displays 401 and 402 are a single card, e.g., a single screen. Each of the various services associated with a key has an index and  
25 when a particular choice is made by the user, the choice defines an index. The client process then displays all of the services with the index that corresponds to the index defined by the user's choice.

In screen display 402, the user is given a series  
30 of choices of services that are available to the user under tab seven. Initially, item three in screen display 402 is not highlighted. In this example, the user depresses the three key on the keypad of cellular telephone 100 to select the stock quotes and item three  
35 in screen display 402 is highlighted.

In response to this selection, cellular



telephone 100 transmits a request for a stock quote, i.e., a message including a resource locator, over cellular telephone network 100 and internet 140 to service provider 141. In response to the request, service provider computer 141 executes the application addressed by the resource locator. The application retrieves a card deck that, in turn is transmitted to cellular telephone 100. The card deck includes a display card and an entry card.

Upon receiving the card deck, the client process in cellular telephone 100 interprets the display card and generates screen display 403 (Fig. 4D). When the user depresses a predetermined key, entry screen display 406 (Fig. 4E) is generated on display screen 105 of cellular telephone 100.

Initially, the box with letters SUNW in screen display 406 is empty. The letters SUNW are entered in the box by the user to indicate the ticker symbol of the stock for which the user wants information. After the user has entered the stock ticker symbol, the user presses the predetermined key to indicate that the entry is complete.

In response to the entry by the user, the client module appends the stock ticker symbol to the resource locator and transmits the resource locator to service provider computer 141 which, in turn, executes an application addressed by the resource locator to retrieve the latest stock market information for the stock ticker symbol. Service provider 141 uses the retrieved information to generate a card deck that contains the information and then transmits the card deck to cellular telephone 100.

The client process in cellular telephone 100 interprets the first card in the deck and generates screen display 409 (Fig. 4F). For convenience, the Figures 4F to 4I are grouped together and separated by

a dotted line. However, at any given time, in this embodiment, display screen 105 can display any four adjacent lines and so the grouping of lines in Figures 4F to 4I is for convenience only to demonstrate the level of information that can be retrieved and displayed by the client process. The use of a four line display screen is illustrative only. The client process of this invention can work with any size display screen, even a one line display screen.

However, a multi-line display screen is preferred.

In the Figures discussed above, the display screen is a pixel display and so can display images. In another embodiment, the display screen only displays text and is smaller in size. For such an embodiment, the various entries are abbreviated and only text is displayed, but the general operation is identical to that just described. Also, the various computer networks can be interlinked so that a user with access to one computer network can obtain information on another computer network. Moreover, the embodiments described above are merely illustrative. One important aspect of this invention is that cellular telephone 100 can interact with any type of server application that is configured to communicate with and interact with the client process in cellular telephone 100. Thus, the user is no longer limited to only a few services offered by a telephone network provider.

In Figure 1, the cellular telephone user must address, i.e., connect to, each computer of interest to access the different services. Consequently, each computer requires the information necessary to communicate with cellular telephone 100. In another embodiment, not illustrated, cellular telephone 100 contacts a single central computer over data capable cellular telephone network 110. This computer is connected to each of the other networks illustrated in

Figure 1. Consequently, the user of cellular telephone 100 sends a message including a resource locator to the central computer, the central computer processes the message and retrieves the information addressed by the resource locator from the appropriate network shown in Figure 1. After the requested information is retrieved, the central computer generates a card deck and transmits the card deck to cellular telephone 100. In this embodiment, only one computer must be configured to communicate with cellular telephone 100. However, that same computer must be configured to communicate with all other computer networks that are of interest to the user of cellular telephone 100.

Hence, according to the principles of this invention, the client process on a two-way data communication device can initiate an interaction with a particular server computer. The server computer transmits (i) information to the client process to generate a user interface, and (ii) a resource locator for each possible selection by the user from the user interface. The resource locators can address applications on the server computer, applications on over server computers, or an application on the server computer that in turn accesses other server computers. Consequently, the user of a two-way data communication device is limited only by the applications provided on the server computers.

Further, the user can be provided new and/or updated capabilities by modifying the applications on the server computers. There is no requirement that the client process be changed for a new or updated application. The client process must only interpret the information received from an application and transmit a message for additional information. These operations are unaffected by a new or updated

application. Consequently, as noted above, this invention does not require distribution of application updates or new applications to the end user of the two-way data communication device.

5        Figure 5 is an illustration of another embodiment of airnet network 150. In this embodiment, the messages from a two-way data communication device, e.g., devices 100, 101, and 102 are directed to an airnet network translator 500. Airnet network  
10       translator 500 and a particular two-way data communication device, e.g., any one of devices 100, 101, and 102 communicate using the protocol for point-to-point communication on the particular network linking airnet network translator  
15       500 and that two-way data communication device. For example, if data capable cellular telephone network 110 is a cellular digital packet data network, either the transmission control protocol (TCP) or the user datagram protocol (UDP) can be used.

20       Airnet network translator 500 transfers data between the two-way data communication device and the selected computer network after translator 500 validates the communication path, as explained more completely below, and encrypts the message transferred  
25       to the computer network if necessary. In addition, airnet network translator 500 collects transaction and billing information concerning the communication between the two-way data communication device and the designated computer network. Specifically, airnet  
30       network translator 500 provides access control for paying services and a logging mechanism for billing. Airnet network translator 500 can also provide a directory service to users.

35       Figure 6 is a block diagram of a typical GSM digital cellular telephone. Each of the hardware components in cellular telephone 600 is known to those

skilled in the art and so the hardware components are not described in detail herein. The compiled and linked processes of this invention are stored in ROM 601 as a client module 602 and support modules 603.

5 Upon activation of a predetermined key sequence utilizing the keypad, physical layer processor 610, that is sometimes referred to herein as a microcontroller, initiates a client process using client module 602 in ROM 601.

10 In this embodiment, client module 602 includes a plurality of manager modules, as explained more completely below. The particular manager modules utilized is determined by the characteristics of the particular cellular telephone 100 in which client  
15 module 602 is implemented. Client module 602 must include manager modules to interface with modules that control the particular hardware in cellular telephone 100, a manager module to interface with the particular cellular telephone network protocol used by  
20 cellular telephone 100, and a manager module to interpret the card decks received. Therefore, the particular manager modules described herein are only illustrative of the principles of this invention and are not intended to limit the invention to the specific  
25 modules described more completely below.

In this embodiment, the client process controls the operations of a plurality of cellular telephone dependent support processes that are stored in ROM 601 such as a display module, a keypad module, and a  
30 network and terminal control module, that were referred to above collectively as support modules 603. The combination of the client process, display process, keypad process, and network and terminal control process are considered foreground tasks by the  
35 microkernel in cellular telephone 600. Also, herein module and process are used interchangeably, but those

skilled in the art will appreciate that the module is the computer software as stored in a memory, preferably, a ROM, of cellular telephone 600 and the corresponding process is the execution of the module by the microcontroller in cellular telephone 600. Again, note that this invention does not require a separate processor and instead can utilize the processing power that already exists in cellular telephone 600, because as described above, the client process of this invention is so lightweight.

The user interface for cellular telephone 600 determines the version of the user interface manager module that is stored in ROM 601. In one embodiment, the parameters used to define the user interface level are the display resolution, the pixel access of the display, and the support of soft keys. One definition of the user interface levels is given in Table 1.

TABLE 1

USER INTERFACE LEVEL DEFINITIONS

Level 1	Text only; 1 or more lines; 12 to 15 characters per line; and no soft keys.
Level 2	Text only; 4 or more lines; 20 to 25 characters per line; and soft keys.
Level 3	Pixel access; 150 by 75 pixels or larger; and soft keys.

The user interface manager module presents data to the display module which in turn drives display screen 605; and captures data entered by the user on display screen 605. In response to this information, the client process prepares a message for transmission by a network manager module.

To more completely explain the operations

performed over airnet network 150, Figure 7 is a block diagram that illustrates the various components in one embodiment of this invention of cellular telephone 700. Those skilled in the art will appreciate that cellular telephone 700 includes circuitry and software similar to that illustrated in cellular telephone 600 for voice and data operations supported by cellular telephone 700 in addition to the modules for operation on airnet network 750. Similarly, server computer 743 includes other software and hardware that is known to those skilled in the art and so is not illustrated in Figure 7 for clarity.

In this embodiment, client module 702 in digital cellular telephone 700, that is executing on the microcontroller of telephone 700, communicates with server computer 743 over cellular digital packet data (CDPD) network 710. Cellular digital packet data network 710 is used to illustrate one embodiment of this invention on one two-way data communication network. The principles of this invention can be used with a wide variety of two-way data communication networks. For example other two-way data communication networks for cellular telephones that may be used include TDMA, CDMA, and GSM circuit switched data networks; and the AMPS analog cellular network with a modem. Similarly, for two-way pagers, two-way data communication networks include PACT, or other priority two-way paging networks with data transport capability.

Prior to considering the operation of this configuration of airnet network 750 in more detail, another aspect of this invention is required. Specifically, a technique is required for conveying instructions from digital cellular telephone 700 to a server application on server computer 743, and conversely.

A telephone interaction description

language (PIDL) is defined for use by service developers. A terminal interaction language (TIL) is a distillation of the telephone interaction description language and describes the same interaction to digital cellular telephone 700 as the telephone interaction description language describes to computer 743.

With the exceptions described more completely below, a process in the terminal interaction language is a compressed version of the same process written in the telephone interaction description language. The terminal interaction language allows easy parsing on the two-way data communication device, which in turn makes the client smaller than a client for the telephone interaction description language that is readable by humans, but is not optimized for parsing by a machine.

The compression from the telephone interaction description language to the terminal interaction description language is done typically at run time because some cards are computed cards and so cannot be precompiled. A wide variety of techniques can be used to convert the telephone interaction description language to terminal interaction language. The important aspect is that, if bandwidth across the cellular telephone network is limited, a compressed form of the telephone interaction description language is used.

Preferably, each data type is compressed to facilitate optimal transfer over the two-way data communication network. For example, the verbs in the telephone interaction description language are compressed using a binary tokenization. Graphics are compressed using run length limited compression and text is compressed using any one of the well-known techniques for text compression. While compression of the telephone interaction description language is not



required to implement this invention, compression makes the invention more efficient by utilizing the bandwidth of the network more effectively.

Instructions in the telephone interaction  
5 description language and in the terminal interaction language are grouped into a deck and a card. Each deck includes one or more cards. A card includes the information, i.e., a set of telephone interaction description language, required to generate a screen.  
10 As indicated above, a screen can be larger than the number of lines in a display screen. Other equivalent terms for a card include a page and an atomic interaction. Thus, a card deck is simply a group of screens. The number of cards in a card deck is  
15 selected to facilitate efficient use of the resources in the two-way data communication device and in the airnet network.

For simplicity, in this embodiment, each card is a single operation. Herein, an operation is defined as a  
20 related set of actions such that the user does not encounter an unanticipated delay in moving from one action to the next, i.e, the user does not have to wait for client module 702 to retrieve another card deck from computer 743. Also, a deck may include  
25 definitions of soft keys that stay in force while the deck is active, i.e, being executed by the cellular telephone microcontroller.

Computer 743 may contain stored static telephone interaction description language decks. Computer 743  
30 also generates telephone interaction description language decks in response to data from, or choices made by, the user of cellular telephone 700.

In the embodiment shown in Figure 7, computer 743 converts a telephone interaction description language  
35 deck to a terminal interaction language deck, that in turn is transmitted to cellular telephone 700. The

terminal interaction language is designed so that decks can be stored unaltered in memory 716 of cellular telephone 700 and referenced directly with little or no parsing. While telephone interaction description

5 language decks on computer 743 may contain references to images, a terminal interaction language deck contains the images at the end of the deck. Thus, if a particular two-way data communication device does not support display of images, the images are easily  
10 stripped from the terminal interaction language deck before the deck is transmitted to that particular two-way data communication device.

As indicated above, each interaction with the user of cellular telephone 700 is described by a deck or a  
15 series of decks. Logically, the user retrieves a terminal interaction language deck stored in a memory 716 of cellular telephone 700 after receipt from computer 743 over CDPD network 710. The user reviews the information displayed by cards in the deck and  
20 makes choices and/or enters requested information and then requests another deck, as described above with respect to Figures 2A to 2H, for example.

When the user receives a deck, the first card of information is displayed on display screen 705.  
25 Typically, as shown above, the first card is text, an image, or a combination of an image and text. After the user has reviewed the first card, the user hits a NEXT key to view the next card in the deck. Similarly, a user can return to a previous card in the deck by  
30 using a PREV key. Thus, using the NEXT and PREV keys, the user can navigate back and forth through the deck. Within a card, the user uses a scroll key or keys to move the portion of the card displayed up and down. This description of a particular method used to  
35 navigate through a deck and within a card is not intended to limit the invention to this particular

method. In view of this disclosure, those skilled in the art will be able to use a wide variety of ways to navigate through a deck and within a card.

Cards, in this embodiment, are one of three types, a display card, a choice card, and an entry card. Independent of the type of card, the card can contain text and images. In addition, the invention is not limited to these three particular types of cards. The definition of the three particular types of cards is used to facilitate a description of the invention and to assist the developer's in organizing applications.

A display card gives information to the user to read. The display content can include any one of, or any combination of text, an image, and a soft key. The soft key is in effect only while the display card is active.

A choice card displays a list of choices for the user. The choices are automatically presented in a format specified on the choice card. See Appendix I, which is a part of the present disclosure and is incorporated herein by reference in its entirety. As explained above, the user makes a choice by depressing the key corresponding to the choice.

An entry card is used to obtain input data from the user. An entry card displays one or more entry lines. Typically, each entry line includes a display followed by an entry line. The entry line, in this embodiment, can be for either numeric or text data.

In this embodiment, choice and entry cards prevent the user from moving to the next card until the user has entered the requested information. When the user reaches the last card in a deck and hits the NEXT key, a request for a new deck is initiated. The deck requested is determined by either the deck that the user has completed, or by the choices made by the user. Also, when the deck is completed, the choices and/or

data entered by the user typically are transmitted along with the request for the new deck to computer 743.

Appendix I is one embodiment of a syntax for the telephone interaction description language and the terminal interaction language of this invention. In one embodiment, the telephone interaction description language is described using a subset of the standard generalized markup language. Only a subset of the standard generalized markup language is utilized so that telephone interaction description language parsers also can be written easily using simple tools like lex and yacc.

Returning to operation over airnet network 750, cellular telephone 700 includes a display module 712, a keyboard module 711, a client module 702, and a UDP interface module 714. In this embodiment, module 702 is stored in a non-volatile memory (not shown) of telephone 700 and is executed by the microcontroller (not shown) in telephone 700. Modules 711, 712, and 714 operate under the control of client module 702.

Client module 702 includes instructions that direct the microcontroller in cellular telephone 700 to perform the operations described more completely below with respect to Figures 8A to 8D. The operations include sending uniform resource locator (URL) requests to HyperText Transfer Protocol (HTTP) server 749, parsing and displaying a TIL deck or decks returned by HTTP server 749, and generating new URLs based on the user's key presses. For a description of HTTP server software and platforms that can run the HTTP server software, see, for example, Ian S. Graham, The HTML Sourcebook, John Wiley & Sons, Inc., New York, Chapt. 8, (1995), which is incorporated herein by reference.

User datagram protocol (UDP) interface module 714

couples CDPD network 710 to client module 702, and allows client module 702 to communicate using UDP over CDPD network 710. The user datagram protocol is well known to those skilled in the art and is documented extensively. UDP interface module 714 supports transmission of simple stand-alone messages between the connection partners.

Display module 712 is a display driver that couples client module 702 to display screen 705 and so allows client module 702 to specify the information presented on display screen 705. The user interface manager module within client module 702 converts the display information in a card to instructions for display module 704 which in turn provides signals that drive the hardware that controls the operation of display screen 705. For example, if the TIL deck includes an image, the user interface manager module determines whether the active card calls for display of the image. If the active card directs the user interface manager module to display the image, the user interface manager module passes the image in memory 716 to display module 712, which in turn displays the image on display screen 705.

Keyboard module 705 couples keypad 715 to client module 702, and stores data representing keys pressed by the user on physical keypad 715 in memory 716. Keyboard module 705 notifies client module 702 when the user has pressed a key.

When client module 702 is notified of a key press, the user interface manager module within client module 702 passes information about the key press to display module 712 that in turn displays the appropriate character on display screen 705, if an entry card is active. If the user interface manager module determines that a choice card is active, and the key press corresponds to one of the choices, the user

interface manager module sends instructions to display module 712 that result in the choice being identified for the user, e.g., highlighted as described above.

In addition to HTTP server 749, host computer 743  
5 includes a UDP interface module 748, CGI programs 761 stored in a memory 755 of host computer 743, and TIL decks 760 stored in memory 755.

HTTP server 749 uses UDP interface module 748 to send data to and receive data from CDPD network 710.  
10 TIL decks 760 are TIL decks that can be accessed by HTTP server 749. Static files containing PIDL decks are converted to TIL decks only once on HTTP server 749. CGI programs 761 are common gateway  
15 interface programs that produce PIDL decks that are used by HTTP server 749 to produce TIL decks that in turn are transmitted via UDP interface modules 748 and 714 and cellular telephone network 710 to client module 702. In this embodiment, the services available over airnet network 750 are applications accessible by  
20 HTTP server 749 on Internet 140 for which a service developer has written a PIDL deck, or a CGI script that in turn generates a PIDL deck, and is stored on computer 743.

The architecture in Figure 7 demonstrates some  
25 important aspects of this invention. First, the applications, the PIDL decks and CGI scripts in this embodiment, are independent of the particular two-way data communication network. For HTTP server 749 to communicate over a different two-way data communication  
30 network that does not support UDP, only UDP interface module 748 must be changed. The applications are unaffected by such a change.

Second, the applications on HTTP server 749 are independent of the two-way data communication device  
35 with which HTTP server 749 is interacting. An application on HTTP server 749 can communicate with any

two-way data communication device that includes the appropriate client and a module to transmit and receive data over the two-way data communication network.

These two facts mean that an investment in developing  
5 an application is insulated from either advances in two-way data communication devices, or advances in two-way data communication network technology.

Figures 8A to 8D are a process flow diagram for one embodiment of this invention. Initially, when the  
10 user initiates communication over airnet network 750, client module 702 initializes a work space in memory 716 of cellular telephone 700 and then, in get home URL process 801, stores a URL in the work space. According to the principles of this invention, in one  
15 embodiment, each cellular telephone that utilizes the airnet network has a home URL stored in a non-volatile memory that is used to retrieve a home card deck for the cellular telephone. In another embodiment, the cellular telephone obtains the home URL from  
20 server 749. Thus, in get home URL process 801, client module 702 obtains the home URL. Herein, a URL is an example of a specific embodiment of a resource locator.

For example, in get home URL process 801, client module 702 obtains a home URL, such as  
25

`http://www.libris.com/airnet/home.cgi`

and stores the home URL in the work space. The portion of the home URL, `http://www.libris.com`, identifies a  
30 particular HTTP server, i.e., server 749, on the world-wide web. The portion of the URL, `/airnet/home.cgi`, specifies a particular common gateway interface program within CGI programs 761. The use of a URL pointing to a server on the world-wide web is illustrative only is  
35 not intended to limit the invention to applications on the world-wide web. In general, cellular telephone 700

obtains an identifier, i.e, a resource locator, of a home application on a home server that is executed by the server when the cellular telephone initially becomes active on airnet network 750, and stores the resource locator in the work space.

Next in create HTTP request process 802, client module 702 converts the URL in the work space to a HTTP request. For example, for the above URL, create HTTP request process 802 generates a method field, such as

```
GET /airnet/home.cgi HTTP/1.0
```

The GET method is part of HTTP. Thus, the format for the GET method is known to those skilled in the art. Also, this particular form of the method is used because a specific server connection is established by cellular telephone 700 and so identification of the server is unnecessary. Nevertheless, briefly, this command instructs server 749 to execute application home.cgi and execution of application home.cgi in turn results in generation of a home deck and a subsequent transmission of the home deck to cellular telephone 700. HTTP/1.0 specifies the HTTP version used by client module 702 in cellular telephone 700.

In addition to the method field, client module 702 in process 802 could also generate appropriate HTTP request fields to pass information to server 749 about the capabilities of client module 702. The request fields can include information such as lists of the MIME content-types acceptable to the client; lists of data encoding types acceptable to the client; user authentication and encryption scheme information for the server; the length in bytes of the message being sent to the server; and the Internet mail address of the user accessing the server. This list of information is illustrative only and is not intended to



limit the invention to the particular request fields described herein. Any request field defined by HTTP can be utilized by client module 702. However, in this embodiment, the defaults are utilized and so no HTTP request fields are generated.

Typical HTTP methods that can be generated in HTTP request process 802 are a GET method for requesting either a TIL deck from server 749, or execution of a common gateway interface program on server 749; and a GET method request to a common gateway interface program with data, e.g., a query string appended to the URL. In either case, a URL is transmitted to server 749 within the particular message. After create HTTP request process 802 is complete, client process transfers to transmit request process 804.

However, if the transmission control protocol is used instead of UDP, client module 702 would access a TCP module in establish server connection process 803 that replaced UDP module 714. Since, in this embodiment, UDP is used, establish connection process 803 is enclosed by a dashed line in Figure 8A to indicate that this process is unnecessary when using UDP.

In establish server connection process 803, a virtual connection would be made over CDPD network 710 between TCP interface module 714 and a TCP interface module in HTTP server 749 so that data could be transmitted between cellular telephone 700 and computer 743 using TCP, e.g., buffers to support data exchange are defined. The establishment of a TCP connection is well-known and so is not described further.

In Figure 8A, a dashed line connects establish server connection process 803 with establish client connection process 860, that is also dashed, that is performed by HTTP server 749. This indicates that both

client module 702 and server 749 are required to complete process 803.

When the TCP virtual connection is established, client module 702 transfers processing from establish  
5 server connection process 803 to transmit request process 804. Similarly, server 749 transfers to request received check 861, in which server 749 waits until a request is received. Establish client connection process 860 is not needed for UDP and so  
10 HTTP server 749 initiates processing in request received check process 861. Process 860 is enclosed within a dashed line box to indicate that the process is used only for TCP.

In transmit request process 804, the HTTP request  
15 is sent from the work area in telephone 700 to HTTP server 749. Again, a dashed line connects process 804 of client module 702 to request received check 861 that is performed by HTTP server 749 to indicate that the check is dependent upon information from client  
20 module 702. When the transmission of the request is complete, client module 702 transfers to response received check 806.

Upon receipt and storage of the HTTP request, request received check 861 transfers to service request  
25 process 862 in which HTTP server 749 initiates service of the received request. In service request process 862, if the HTTP request only seeks transfer of a static deck, HTTP server 749 retrieves the requested static deck from TIL decks 760. Conversely, if the  
30 request requires server 749 to obtain data from the Internet or to append data to a particular file, server 749 launches the common gateway interface application addressed in the request, and passes the data in the HTTP request to this application for  
35 further processing.

For example, if the user of cellular telephone 700

requested a fax as in Figure 2F, the HTTP request identifies a common gateway interface application in CGI programs 761 that accepts as input data the telephone number and grabs the information to be faxed.

5 The CGI application generates an e-mail transmission to the fax gateway. Similarly, for a stock quote, server 749, in response to the HTTP request, launches a common gateway interface application that sends out a stock query over Internet 140 to a stock quote service

10 provider using the ticker tape symbol passed as input data by server 749 to the common gateway interface application. When the response to the stock query is received, the common gateway interface application builds a PIDL deck that includes the data in the

15 response to the stock query.

Upon completion of servicing the request, HTTP server 749 converts the PIDL deck to a TIL deck and returns the TIL deck to client module 702 using UDP in transfer response process 863, that is connected by

20 a dotted line to response received check 806 in client module 702. As the TIL deck is transferred, client module 702 stores the deck in memory 716.

After the TIL deck is transferred, HTTP server 749 closes the process for responding to the message from

25 cellular telephone 700. All the information needed by client module 702 to generate a user interface on display screen 705 and for responding to any selection or data entry presented in the user interface is included in the TIL deck. Consequently, client

30 module 702 only has to interpret the TIL deck and interpret the user input to transmit the next message to HTTP server 749. The state for the HTTP server is defined in the next message. Consequently, HTTP server 749 is stateless because HTTP server 749 does not

35 retain state information concerning a response to a message after the message is transmitted.

However, in another embodiment (not shown), a server could retain state information concerning each interaction with a client module. For example, if the server transmitted a choice card to the client module, the server would retain state information indicating that a choice was pending from the client module. In this embodiment, when the user makes a choice, e.g., depresses key two to indicate choice two, the choice is transmitted to the server which in turn accesses the URL associated with choice two. If this URL addresses another application, the server executes that application. Thus, in this embodiment, the server retains state information concerning each interaction with a client module. In view of this disclosure, those skilled in the art can implement the principles of this invention utilizing a server that retains state information when such a client/server combination is advantageous.

Returning to the present embodiment, when the TIL deck is received, client module 702 leaves response received check process 806 and transfers to process first card 808. However, if TCP is used instead of UDP, client module 702 upon leaving check 806 would close the virtual TCP connection in transmission completed process 807. Upon closing the virtual TCP connection, processing would transfer to process first card 808. Again, transmission complete process 807 is enclosed within a dashed line box to indicate that process 807 is used only with TCP.

In process first card 808, client module 702 parses the TIL deck and interprets the first card. Processing transfers from process first card 808 to generate display process 809.

In generate display process 809, client module 702 passes the data to be displayed in the first card to display module 712. Display module 712, in response to

the data, drives the text and images in the data on display screen 705. Generate display process 809 transfers processing to key press check 820 through node 813. In Figures 8A to 8D, any circular node with the same alphanumeric character and reference numeral is the same node. The circular nodes are used to establish connections between the various processes in the method of Figures 8A to 8D without cluttering the figures with a number of connection lines.

Client module 702 waits in key press check 820 for the user to press a key on keypad 715 of cellular telephone 700. In this embodiment, cellular telephone 700 is assumed to have the capability to support two soft keys, a scroll-up key, a scroll-down key, a previous key, a next key, and keys zero to 9 that are configured in the standard telephone keypad configuration. In view of the following disclosure, if one or more of these keys are not present, one of skill in the art can alter the method for the particular configuration of the cellular telephone keypad, or other two-way data communication device keypad. For example, if the cellular telephone included a home key, the key press processing described more completely below would include a check that detected when the home key was pressed and would in turn transfer to get home URL process 801.

Briefly, the processes in Figures 8B to 8C, identify the key pressed by the user, identify the action required, and then transfer to a process that implements the action required. Specifically, when a key on the keypad is pressed, keypad module 711 stores an identifier for the key in work memory 716 and notifies client module 702 of the key press. Upon receipt of the notification from keypad module 711, client module 702 reads the storage location in work memory 716 to determine the key pressed and transfers

processing from key press check 820 to scroll key check 821.

In scroll key check 821, client module 702 determines whether the user pressed either of the scroll keys. If a scroll key was pressed, processing transfers to adjust display process 822 and otherwise to display card check 823.

In adjust display process 822, client module 702 determines which of the scroll-up or scroll-down keys was pressed. Client module 702 then sends information to display module 712 so that the current display is either scrolled-up one line or scrolled- down one line. If the scroll key would move the display beyond a boundary of the current card, the scroll key press is ignored in adjust display process 822.

In response to the information from client module 702, display module 712 adjusts the screen display on display screen 705. Client module 702 transfers processing from adjust display process 822 to key press check 820 through node 813.

If a scroll key was not pressed, processing is passed through scroll key check 821 to display card check 823. Client module 702 takes action that depends on the particular type of card that is currently being displayed on display screen 705. If the current card is a display card, client module 702 passes through display card check 823 to soft key check 828, and otherwise transfers to choice card check 824.

Assuming for the moment that the current card is not a display card, choice card check 824 determines whether the current card is a choice card. If the current card is a choice card, client module 702 passes through choice card check 824 to choice key check 826, and otherwise transfers to data key check 826.

Assuming for the moment that the current card is neither a display card nor a choice card, the current

card must be an entry card, because in this embodiment only three card types are defined. Thus, client module 702 does not check for an entry card. Rather, data key check 826 determines whether a valid data key was pressed. In this embodiment, the data keys are keys zero to nine on the key pad, and the # key. In other embodiments, other combinations of keys could be defined as data keys. If the pressed key was one of the data keys, data key check 826 transfers to process data entry 827 and otherwise transfers to soft key check 828.

In process data entry 827, client module 702 knows whether the predictive text entry process is turned-on, because one of the parameters on the entry card specifies whether to use the predictive text entry process, as described in Appendix I, which is incorporated herein by reference in its entirety.

If the predictive text entry process is not turned-on, client module 702 in process data entry 827 enters the pressed key value in a text entry buffer in work memory 716 at the appropriate location. Also, client module 702 sends information to display module 712 so the value of the pressed key is displayed in the appropriate location on display screen 705 by display module 712.

If the predictive text entry process is turned-on, client module 702 uses the novel predictive text entry process in process data entry 827, as described more completely below with respect to Figures 9, 10A to 10T, and 11, to determine the letter to select from the set of letters associated with the pressed key. After the predictive text entry process determines the appropriate letter, a value representing the letter is stored at the appropriate location in the text buffer in work memory 716. Also, client module 702 sends information to display module 712 so that the letter is

displayed in the appropriate location on display screen 705. Upon completion of process data entry 827, client module 702 transfers processing through node 813 to key press check 820.

5       The previous description assumed that the current card was an entry card, but if the current card is a choice card, choice card check 824 transferred to choice key check 826. In generate display process 804 for the choice card, each of the choices are labeled  
10 according to information on the choice card and some or all of the choices are displayed on display screen 705. Thus, choice key check 826 determines whether the pressed key corresponds to one of the choices. If the pressed key is one of the choices, client module 702,  
15 in one embodiment, sends information to display module 712 to indicate the selected choice. Client module 702 also transfers from choice key check 826 through node 831 to store identifier process 850 (Fig. 8D), that is described more completely below.  
20 Conversely, if the pressed key is not one of the choices, choice key check 826 transfers to soft key check 828.

Soft keys can be specified both for a deck as a whole and per card, i.e., a physical key on the keypad  
25 is specified as a soft key as described more completely in Appendix I. Each soft key specification includes an identifier that defines the action to be taken when the soft key is pressed.

When a soft key is specified for a deck, the soft  
30 key remains in effect for the entire deck. However, when a soft key is specified for a card, the card soft key specification temporarily overrides the corresponding deck soft key specification, i.e., the deck soft key specification for the same physical key  
35 as the card soft key specification, while the card is visible, i.e., displayed on display screen 705. This



override is done independently for the two soft keys. Thus, soft key check 828 transfers processing to first soft key check 829 if the key pressed is one of the two possible physical soft keys. Conversely, soft key  
5 check 828 transfers processing to next key check 840 (Fig. 8C), if neither of the two possible physical soft keys is pressed by the user.

In first soft key check 829, client module 702 determines whether the pressed key corresponds to the  
10 first soft key. If the pressed key is the first soft key, check 829 passes the active identifier for the first soft key to store identifier process 850 through node 831. Conversely, if the pressed key is not the first soft key, processing transfers from check 829 to  
15 second soft key check 830.

If the pressed key is the second soft key, check 830 passes the active identifier for the second soft key to store identifier process 850 through node 831. Conversely, if the pressed key is not the  
20 second soft key, e.g., a physical key that can be defined as a soft key was pressed but neither the current deck nor the current card defines a soft key for that physical key, processing transfers from check 830 to key press check 820 through node 813.

25 When pressing transfers to next key check 840, client module 702 determines whether the pressed key was the next key. If the next key was pressed, processing transfers to display card check 841 and otherwise to previous key check 846.

30 If a display card is the current card, the next key is used to move to another card in a deck, or alternatively to another deck. Thus, display card check 841 transfers processing to last card check 842 when a display card is the current card, and otherwise  
35 to entry card check 843.

Last card check 842 determines whether the current

card is the last card in the deck. If the current display card is not the last card in the deck, last card check 842 transfers processing to read next card process 845, which in turn reads the next card in the deck and transfers through node 812 to generate display process 809.

If the current display card is the last card in the deck, the deck includes an identifier that specifies the location to transfer to from the last card. This identifier can be a URL to another deck, to a common gateway interface program, or an address for a card within the current deck, for example. Thus, last card check 842 transfers through node 831 to store identifier process 850 when the current display card is the last card in the deck.

If the current card is not a display card but is an entry card, display card check 841 transfers to entry card check 843. In this embodiment, the next key is the predetermined key used to indicate that all the data for an entry on an entry card has been entered. Thus, if the current card is an entry card, entry card check 843 transfers processing to store data process 844.

Store data process 844 stores the data entered in at an appropriate location in memory that is specified in the current entry card. Typically, the data is combined as an argument with a URL and stored. Upon completion, store data process 844 transfers through node 810 to create HTTP request process 802 (Fig. 8A).

When the next key is pressed, if the current card is neither a display card nor an entry card, the current card is a choice card. However, as indicated above, in this embodiment client module 702 requires that the user make a choice and does not allow use of the next key. Consequently, if the current card is not an entry card, entry card check 843 transfers

processing through node 813 to key press check 820.

The previous discussion assumed that the next key was pressed and so next key check 840 transferred processing to display card check 841. However, if the next key was not pressed, next key check 840 transfers processing to previous key check 846. If the previous key was pressed, check 846 transfers to first card check 847 and otherwise returns processing to key press check 820.

First card check 847 determines whether the current card is the first card of a deck. If the current card is not the first card, processing transfers from first card check 847 to read previous card 849, which in turn reads the previous card and transfers to generate display process 809 through node 813. Conversely, if the current card is the first card, processing transfers to home deck check 848.

If the current card is the first card in the home deck, there is not a previous card and so home deck check transfers processing to key press check 820 through node 813 and so the previous key press is ignored. If the current deck is not the home deck, home deck check 848 retrieves the identifier for the previous deck and transfers through node 831 to store identifier process 850.

Store identifier process 850 is reached through node 831 from several different points. The operations in store identifier process 850 are the same irrespective of the particular process that transfers to process 850. In each instance, an identifier is passed to store identifier process 850 and process 850 saves the identifier in working memory 716. The identifier can be, for example, a pointer to another location in the current card, an address of another card in the current deck, a URL to a deck stored in working memory 716, a URL to a TIL deck in TIL

decks 760 on computer 743, or perhaps, a URL to a common gateway interface program in CGI programs 761 on computer 743. Thus, process 800 checks the stored identifier to determine the action required.

5 Specifically, in identifier to current deck check 851, client module 702 determines whether the identifier is to a card in the current deck. If the identifier points to the current deck, check 851 transfers processing to retrieve data process 852 and  
10 otherwise to URL to local deck check 853.

In retrieve data process 852, client module 702 retrieves the information stored at the location indicated by the identifier from working memory 716 and processes the information. Retrieve data process 852  
15 transfers through node 812 to generate display 809 (Fig. 8A) that was described above.

URL to local deck check 853 determines whether the identifier is a URL to a deck that is stored in working memory 716, e.g., cached. If the deck is stored  
20 locally, check 853 transfers to retrieve local deck 854 which in turn moves the local deck into the storage location for the current deck. Retrieve local deck 854 transfers processing through node 811 to process first card 808 (Fig. 8A), that was described above.

25 If the identifier is neither to a location in the current deck, nor to a local deck, the identifier is a URL to an object on computer 743. Thus, in this case, check 853 returns processing to create HTTP request 802 through node 810.

30 Process 800 continues so long as the user continues to enter and process the information provided. In this embodiment, process 800 is terminated, for example, either by the user powering-off cellular telephone 700, selecting a choice or entry  
35 card that discontinues operations of client module 702, or remaining inactive for a time longer than a time-out

period so that client module 702 shuts itself down.

To further illustrate the operations in process 800, consider the following example which is returned to client module 702 as a TIL deck in response to a HTTP request generated by process 802. For readability, Table 2 presents the deck in PIDL. In this example, all of the choices are for applications on the same server. However, in another embodiment, each URL could address any desired combination of servers.

TABLE 2  
EXAMPLE OF PIDL CHOICE DECK

```
<PIDL>
<CHOICE>
<CE URL=http://www.libris.com/airnet/nnn>News
<CE URL=http://www.libris.com/airnet/www>Weather
<CE URL=http://www.libris.com/airnet/sss>Sports
</CHOICE>
</PIDL>
```

In process first card 808, client module 702 interprets the information in Table 2 and transfers to generate display process 809. In generate display process 809, client module 702 sends information to display module 712 so that the user is presented with a list of three choices on display screen 705, i.e, a user interface for the choice card is generated:

1. News
2. Weather
3. Sports

Generate display process 809 (Fig. 8A) transfers to key press check 820 (Fig. 8B). When the user presses the two key on keypad 715, key press check 820 transfers through check 821 to display card check 823.

Since the current card is a choice card, check 823 transfers processing to choice card check 824, which in turn transfers to choice key check 826. Since the two key was pressed and that key is a choice key, check 826 transfers processing to store identifier process 850 (Fig. 8D). In process 850, client module 702 stores the URL corresponding to two, i.e,

URL=http://www.libris.com/airnet/www

in working memory 716.

Since this URL is to an object on computer 743, processing transfers through checks 851 and 853 to create HTTP request process 802, which in turn generates the request. When the HTTP request is transmitted to server 749, as described above with respect to process 804, server 749 in service request process 862 retrieves deck www from TIL decks 760. An example of the deck is given in Table 3. Again for readability, the deck is present herein in PIDL.

TABLE 3  
EXAMPLE OF A SECOND PIDL CHOICE DECK

```

25  <PIDL>
    <CHOICE>
    <CE URL=http://www.libris.com/airnet/www-1>World
    <CE URL=http://www.libris.com/airnet
        /www-2>National
30  <CE URL=http://www.libris.com/airnet/www-3>State
    <CE URL=http://www.libris.com/airnet/www-4>Local
    </CHOICE>
    </PIDL>

```

35 The deck in Table 3 is transmitted to cellular telephone 700 and stored in memory 716, as described

above with respect to process 806. The choice card is processed in process 808 and displayed in process 809. As a result of process 809, the user is presented with a list of choices:

5

1. World
2. National
3. State
4. Local.

10

When the user makes another selection, the same sequence of processes as described above for the first choice card is executed by client module 702, and another URL is stored that points to a program on server 749 that retrieves the desired weather information and generates a deck with that information. This deck is transferred to cellular telephone 700 and displayed.

15

As described above, if the current card is an entry card and a key is pressed, client process 702 reaches data key press check 826 (Fig. 8B). If the pressed key is a valid data key, check 826 transfers to process data entry 827.

20

In one embodiment, process data entry 827 uses a novel predictive text entry process for text entry. Recall that on a typical telephone keypad, the keys are labeled with both a number and two or three letters. For example, the two key is also labeled abc. This leads to some ambiguity when using the telephone keypad to enter text. Is the user attempting to enter an a, b, or c when the two key is pressed?

25

30

In one prior art method, two keystrokes were required to enter each letter of text. The first keystroke identified the first key and the second key stroke identified the specific letter desired on the first key. For example, to enter the letter s, the

35

user would first press the seven key that is labeled with letters **p**, **r**, and **s**. Next, the user would press the three key to select the letter **s**. While this method may work well for short sequences that consist of only three or four letters, the method does not work well for English text. For example, if the user has already entered **th** and then presses the three key that is labeled with letters **d**, **e**, and **f**, almost always the desired next letter is the letter **e**. Therefore, making the user press the two key is an extra and unnecessary step.

Client module 702 of this invention utilizes a novel predictive text entry process to reduce the number of key strokes required to enter text using a telephone keypad, or any similar keypad. Using this process, in most cases a single key stroke suffices to enter a single letter.

While this embodiment of the invention is described in terms of a telephone keypad, the principles of the invention are not limited to only a telephone keypad. In general, the process described more completely below, can be extended to any keypad where a single key is used to enter two or more letters. Further, the process is not limited to only letters, but rather is applicable to any keypad where a single key is used to represent two or more characters. In view of the following disclosure, those skilled in the art can use the principles of the predictive text entry process in a wide variety of applications.

The system for predictive text entry includes a predictive text entry module 901 that in this embodiment is included in client module 702, keyboard module 711, and a letter frequency table 902 that is loaded into memory 716, when client module 702 is activated. Predictive text entry module 901 is used in process data entry 827 when specified by the current



entry card. Predictive text entry module 901 performs routine buffer management processes, that are known to one of skill in the art and so are not described further to avoid detracting from the process.

5        Predictive text entry module 901 stores a letter entry for each letter entered in a text buffer 903 in memory 716. In this embodiment, letters Q and Z are assigned to the one key and the zero key is used to enter a space, period, and comma, i.e., the zero key  
10 provides punctuation. However, these assignments are illustrative only, and are not intended to limit the invention to this particular embodiment.

15        The first letter entered is placed at the left end of the buffer and each additional letter is placed in the left most unused space in buffer 903. Thus, the last letter entered in text buffer 903 is the right most character. Letter frequency table 902, sometimes referred to as a table of predictive letter entries, is a look-up table where each entry in the look-table is  
20 addressed by three indices. The first two indices represent the two most recently entered letters in text buffer 903 and the third index represents the key that was pressed. Each predictive letter entry stored in letter frequency table 902 defines which of the letters  
25 associated with the pressed key to use given the previous two letters. For example, since **the** is a commonly occurring string, the entry in table 902 addressed by (t, h, 3) returns **e**, or more concisely the predictive letter entry 2 is returned to indicate  
30 that the second letter of the group of letters **d, e,** and **f** associated with the three key is the predicted letter. Of course, letter frequency table 902 could be altered to return more than a single letter.

35        In this embodiment, letter frequency table 902 was empirically generated using a collection of e-mail. Appendix II is a computer program listing that was used

to generate letter frequency table 902 that is illustrated in Figures 10A to 10T. Briefly, the computer program implements a process that sequentially steps through the data provided and (i) for each possible single letter determines the most likely letter that follows for each key on the keypad; and (ii) for each possible combination of two letters determines the most likely letter that follows for each key on the keypad. In this embodiment, the most likely letter is the letter having the greatest frequency after the single letter. Similarly, the most likely letter is the letter having the greatest frequency after the combination of two letters. If there is a tie in the frequency, the first letter associated with a key is selected. Of course, other measures of likelihood could be used to generate the entries in table 902.

Thus, in Figures 10A to 10T, the first of the ten columns, i.e., the left most column, is the two letter sequence and the first row, i.e., the top row is the keys on the key pad used to enter text. A combination of an entry in the first column and a key in the top row is used to select the predicted text entry. Thus, using the example of **th**, this two key sequence appears in the first column of Figure 100. When the three key is pressed, the letter in the row with **th** as the first entry and in the column with three as the first entry, i.e., **e**, is retrieved. Alternatively, if the four key is pressed, letter **i** is retrieved from the table.

In this embodiment, table 902 is a buffer of two bit numbers. Each two bit number has a value in the range of zero to three, and the two bit number represents a predicted letter for the pressed key. Thus, for a two key labeled with letters A, B and C, a zero represents A; a one represents B; and a two represents C. In general, the number of bits used is

determined by the key that represents the maximum number of characters. In this embodiment, the maximum number of characters represented by a key is three.

The number of storage bits required is an integer  $S$  where  $S$  is the smallest number such that  $2^{**}S$  is greater than or equal to the maximum number of characters represented by a key.

In this embodiment, three indices  $i_0$ ,  $i_1$ , and  $i_2$  are used generate a table index that in turn is used to access a particular predictive letter entry in table 902 of two bit numbers. Each letter is represented as a number, i.e., a letter entry, with letter A being zero, letter B being a one, letter C being a two, and so forth with letter Z being twenty-five. A space element is assigned a space element value of twenty-six. Thus, in this embodiment, there are twenty-seven possible characters.

Upon the initial entry to process 1100 (Fig. 11), letter indices  $i_0$ ,  $i_1$ , and  $i_2$  were set to twenty-six in the initial processing of the entry card to indicate that the text buffer is empty. Also, as explained more completely below, as each letter of text is entered, letter indices  $i_0$  and  $i_1$  are updated and stored in memory 716.

However, in another embodiment, an initialize indices process is the first operation in predictive text entry process 1100. In this embodiment, for the first letter entered, letter indices  $i_0$  and  $i_1$  are set to twenty six; for the second letter entered, letter index  $i_0$  is set to twenty six and letter index  $i_1$  is set to the value of the letter in text buffer 903; and for all letters entered after the first two, the value associated with next to the last letter in text buffer 903 is assigned to letter index  $i_0$  and the value associated with the last letter in text buffer 903 is assigned to letter index  $i_1$ .

Punctuation key check 1101 determines whether the zero key was pressed, i.e., the key selected to represent punctuation.

If the zero key was pressed, processing transfers from check 1101 to process punctuation entry 1102. Process punctuation entry 1102 sets index i2 to twenty-six, and sends the space element value to display letter process 1108. Display letter process 1108 transfers the space element value to display module 712 which in turn drives a space in the text entry on display screen 705. This completes the operation of process data entry for a zero key press and so processing returns to key press check 820.

If the zero key was not pressed, processing transfers through punctuation key check 1101 in data entry process 1100 to key one-to-nine check 1103, i.e., to a data entry key check. If the pressed key was any one of keys one to nine, check 1103 transfers to set letter index process 1104 and otherwise to rotate last entry process 1109.

In set letter index process 1104, one is subtracted from the numeric value of the pressed key and the resulting value is assigned to index i2. Set index process 1104 transfers to generate table index process 1105.

Generate table index process 1105 combines indices i0, i1 and i2 to create a table index. In this embodiment, table index TABLE\_INDEX is defined as:

TABLE\_INDEX = (((i0 \* 27) + i1) \* 9) + i2

Upon completion of generate table index process 1105, generate text entry process 1106, retrieves the two bit value in the table at the location pointed to by table index TABLE\_INDEX and converts the two bit value to a letter represented by the two bit value.

Generate text entry process 1106 transfers to update index process 1107, which in turn stores the value of letter index i1 as letter index i0; stores the value of the retrieved letter in letter index i1; and

5 stores the predicted letter in text buffer 903. While this step assumes that letter indices i0, and i1 are stored and accessed each time in process 827, alternatively, the last two letters in text buffer 903 can be retrieved and assigned to indices i0 and i1,

10 respectively, as described above.

Update index process 1107 transfers to display letter process 1108. Display letter process 1108 sends information to display module 712 which in turn generates the predicted letter on display screen 705.

15 If the pressed key is not one of keys one to nine, i.e., is not a data entry key, processing transfers from check 1103 to rotate last entry 1109. Recall that data key check 826 determined whether the pressed key was one of the zero to nine keys, or the # key. Thus,

20 since checks 1101 and 1103 determined that keys zero to nine were not pressed, the only key press remaining is the # key, i.e., the rotate entry key, which indicates the user wants a letter different than the one entered last in text buffer 903. In rotate last entry 1109,

25 the last character, i.e., the right most character, in text buffer 903 is replaced by the next character in the set of characters assigned to the last key pressed before the # key was pressed. Again, the use of the # key is illustrative only and is not intended to limit

30 the invention to the use of that particular key to rotate an entry.

For example, if the last character in the text buffer 903 was a **t** and the # key is pressed, process 1109 changes the **t** to **u**. If the # key is

35 pressed again, the **u** is changed to a **v**. Alternatively, if the last character in text buffer 903 was a **u** and

the # key is pressed, process 1109 changes the **u** to a **v**. If the last character in text buffer 903 was a **v** and the # key is pressed, process 1109 changes the **v** to a **t**. If index **i1** is stored, as the last character in text buffer 903 is rotated, index **i1** is updated.

Text entry in cellular telephone 700 in different languages or contexts can be supported by using different letter frequency tables. For example, for plumbers, the prediction table can be based on text about plumbing procedures. For Frenchmen, the prediction table can be based on French text. Also, multiple letter frequency tables could be stored in cellular telephone 700, or selectively transmitted to cellular telephone 700, and a particular letter frequency table would be selected on an entry card.

In addition, an entry in the table can be more than a single letter, and thus save even more key strokes. For example, if the text buffer contains **sche** then typing a **3** could return **dule** rather than just **d**. Further, this novel method of text entry can be utilized with other than a cellular telephone. The method is applicable to any device that has several characters assigned to a single key on a keypad.

In the above embodiment, the English alphabet and a space element were used as the character set. Thus, the number 27 used in defining the table index is just the number **N** of characters in the set. Similarly, the number 9 used in defining the table index is just the number **M** of keys in the keypad that represent two or more different characters. Hence, predictive text entry method of this invention is not limited to text and is directly applicable to any keypad where each key represents a plurality of different characters.

In the embodiment of Figures 7, 8, and 9, client module 702 and server module 749 communicate over CDPD network 710. However, this architecture is

illustrative only of the principles of the invention and is not intended to limit the invention to the particular architecture described. Client module 702 and server module 749 can use a wide variety of two-way data communication links to exchange resource locators, e.g., URLs, and TIL decks. For example, the communications link could be a switched voice circuit in which the client module and server module communicate using modems. Alternatively, the communications link could be any other packet switched network, so long as there is some way for client module 702 to get requests to server module 749 and for server module 749 to send data back to client module 702. Further, a special purpose server could be used in place of HTTP server 749. For example, the principles of this invention can be used over various data transport mechanisms including circuit switched data and packet switched data. These data transport mechanisms are being defined and implemented for most of the cellular network standards including GSM, TDMA, and CDMA.

In the configuration of airnet network 750 (Fig. 7), client module 702 communicated directly with a server computer 743. In another embodiment, as illustrated in Figure 5, the two-way data communication device first communicates with an airnet network translator 500 that in turn communicates with the appropriate server. In this embodiment, the operation of two-way data communication devices 100, 101, and 102 is similar to that described above for cellular telephone 700, except the method field in the request generated in process 802 has a different form. For example, using the same information as before, the method field in this embodiment is:

```
GET http://www.libris.com/airnet
                               /home.cgi?&cost=1  ANTP/1.0
```

The method field includes the full address of the server, the expected cost of the service, and the version of the protocol used for communicating with  
5 airnet network translator 500. The two-way data communication device transmits the HTTP request including the complete URL to airnet network translator 500.

Figure 12 is a more detailed block diagram that  
10 illustrates the structures in one embodiment of airnet network translator 500, according to the principles of this invention. In this embodiment, airnet network translator 500 is a computer running under the UNIX operating system with an interface to CDPD network 710.  
15 Such computers are well known to those skilled in the art. Thus, herein only the structures and processes that must be added to such a computer are described.

Airnet network translator 500 supports internet protocol (IP) connections over CDPD network 710 and  
20 with each computer network with which translator 500 can interact. In this embodiment, each of the modules in network translator 500 are processes that are executed by the processor in the computer. Control module 1201 is a daemon that listens for transmissions  
25 over an IP connection from CDPD network 710. When control module 1201 accepts a transmission, control module 1201 spawns an ANT request processor 1204, which in this embodiment is a process, as indicated above. While in Figure 12, only one ANT request processor 1204  
30 is shown, there is an ANT request processor spawned for each transmission that control module 1201 accepts and the ANT request processor remains active until the communication is terminated.

Figure 13 is a process flow diagram that  
35 illustrates the operation of ANT request processor 1204. This process flow diagram considers



transmissions that utilize both TCP/IP and UDP/IP.

However, the processes that are specific only to TCP/IP are enclosed in dashed-line boxes. Upon being spawned for a TCP/IP, in establish connection process 1300, ANT  
5 request processor 1204 establishes a TCP connection using a TCP module in the server with the client module over CDPD network 710. After the connection is established processing transfers from process 1300 to request received check 1301.

10 If UDP is being used, upon being spawned ANT request processor 1204 initiates processing in request received check 1301. In check 1301, ANT request processor 1204 determines whether the request from cellular telephone 700 (Fig. 12) has been received and  
15 stored in memory 1210. Memory 1210 represents both RAM and non-volatile memory in this embodiment. When the request has been received and stored, processing transfers from check 1301 to retrieve data process 1302.

20 In retrieve data process 1302, ANT request processor 1204 retrieves information concerning the source of the URL, i.e., client module 702 of cellular telephone 700 from customer database 1213, and the destination specified in the URL, i.e., the designated  
25 server, from server database 1212. Both databases 1212 and 1213 are stored in memory 1210. A customer record in database 1213 includes, for example, a carrier address, e.g., an IP number, an airnet network translator account number, billing information, and  
30 server subscriptions. A server record in database 1212 includes a server IP address, name, category, and class of service. Class of service refers to the pricing of the service, e.g., basic services, premium services, or pay-per-view services. Other pricing schemes can be  
35 supported in other implementations. When the information is retrieved for the server and service

specified in the URL, and for the customer, processing transfers to valid request check 1303.

In valid request check 1303, ANT request processor 1204 determines, for example, whether client module 702, i.e., the customer, is authorized to access airnet network translator 500; whether client module 702 is authorized to access the server specified in the URL; whether the specified server is available through translator 500; and whether the specified server supports the requested service. Thus, valid request check 1303, validates the client, the server, and the client/server pair. Also, since an estimated cost is included in the request, the status and credit limits on the customer's account could be checked to determine whether the estimated cost is acceptable. If all of the checks are true, processing transfers to create HTTP request process 1306. Conversely, if any one of the checks is untrue, valid request check 1303 passes information concerning the error to return error process 1304.

Return error process 1304 launches a CGI program stored in memory 1210 based on the information received and passes appropriate information to the CGI program. The CGI program builds an appropriate PIDL deck describing the error and converts the PIDL deck to a TIL deck, as described above. When the TIL deck describing the error is complete, return error process 1304 transfers processing to log transaction process 1315 that is described more completely below.

If all the checks in valid request check 1303 are true, create HTTP request 1306 converts the request in memory 1211 to a request specific to the server specified, which in this embodiment is a HTTP request. For example, for the above request, create HTTP request process 1306 generates a method field, such as

GET /airnet/home.cgi?&client=xyz&cost=1 HTTP/1.0

In this embodiment, the method field includes the same information as in the embodiment described above, and  
5 in addition, the method field includes a client identification and the estimated cost.

After create HTTP request process 1306 is complete, ANT request processor 1204 accesses TCP module 1203 in establish server connection process 1307  
10 for TCP/IP and transfers to secure transmission check 1308 for UDP/IP. In establish connection process 1307, a connection is made between the server designated in the client request and the TCP interface module (not shown) so that data can be transmitted  
15 between airnet network translator 500 and the server. When the TCP connection to the server is established, ANT request processor 1204 transfers processing from establish server connection process 1307 to secure transmission check 1308.

20 In secure transmission check 1308, ANT request processor 1204 determines whether the HTTP request from the client requested a server that utilizes a protocol that supports encryption. If such a server was requested, processing transfers to negotiate  
25 process 1309 and otherwise to transmit request process 1310.

In negotiate process 1309, ANT request processor 1204 negotiates an encryption technique with the server. Upon completion of the negotiation,  
30 processing transfers from process 1309 to encryption process 1311. In encryption process 1311, the HTTP request is encrypted using the negotiated encryption technique, and then processing transfers to transmit request process 1310.

35 In transmit request process 1310, the HTTP request is sent from memory 1210 to the HTTP server. When the

transmission is complete, ANT request processor 1204 goes to result received check 1312.

As described above, upon receipt of the request, the HTTP server services the request. Upon completion  
5 of servicing the request, the HTTP server returns either a PIDL deck or a TIL deck to airnet network translator 500. The deck is stored in memory 1210. If the server does not convert the PIDL deck to a TIL deck, the translation is done by airnet network  
10 translator 500.

When the deck is received and stored, ANT request processor 1204 transitions from check 1312 to transmission completed process 1313 for TCP/IP and to secure transmission check 1314 for UDP/IP. ANT request  
15 processor 1204 closes the TCP circuit with the server in transmission completed process 1313. Upon closing the server TCP connection, processing transfers to secure transmission check 1314.

If the server utilized encryption, the deck stored  
20 in memory 1210 is encrypted. Thus, secure transmission check 1314 transfers processing to decryption process 1316 if encryption was used and otherwise to log transaction 1315.

In decryption process 1316, the encrypted deck is  
25 decoded and stored in memory 1210. Also, after the decoding, if the deck must be converted to a TIL deck, the translation is performed. Decryption process 1316 transfer to log transaction process 1315.

In log transaction process 1315, ANT request  
30 processor 1204 writes a description of the transaction to transaction log 1211 in memory 1210. In this embodiment, each transaction record includes a customer identification, a server identification, time required for the transaction, cost of the transaction, and a  
35 completion code. In one embodiment, for security purposes, each cellular telephone is assigned to only

one customer and only one account.

After the transaction is logged, processing transfers to transmit result 1317. In transmit result 1317, ANT request processor 1204 returns the  
5 deck to client 702. After the deck is transmitted, ANT request processor 1204 is terminated.

In one embodiment, if an airnet network translator is fully loaded and another transmission comes in, the translator returns the address of another airnet  
10 network translator and refuses the transmission. The cellular telephone transmits the message to the other airnet network translator. In yet another embodiment, all incoming transmissions are directed to a router. A plurality of airnet network translators are connected  
15 to the router. The router monitors the status of each translator. Each incoming transmission is routed to the least busy translator, which in turn responds to the transmission and performs the necessary operations for continuing communications with the client module.

20 In the above description of client module 702, module 702 interacted with components within the cellular telephone to perform the various operations specified by the user. To insulate client module 702 from the exigencies of various cellular telephones to  
25 the extent possible, a general architecture for client module 702 is described more completely below. This general architecture is designed to have specific manager modules that interact with the modules described above within the cellular telephone and to  
30 provide standard information to the remaining manager modules within client module 702. The manager modules with client module 702 form an interpreter that interprets TIL decks to generate a user interface; interprets data input by the user; and interprets the  
35 TIL decks so that the data input by the user is combined with an appropriate resource locator and

either a message is sent to an appropriate server, or another local TIL deck is interpreted by client module 702. While this embodiment is for a cellular telephone, the manager modules are generic and so are applicable to any client module in a two-way data communication device.

This approach limits the modifications that must be made to client module 702 to implement the principles of this invention in a wide variety of two-way data communication devices over a wide variety of two-way data communication networks. Also, in the above embodiment, client module 702 supported communications and interactions over the cellular telephone network. However, client module 702 can also support local services on cellular telephone 700. Typical local services includes local messages, an address book, and preconfigured e-mail replies, or any combination of such services.

In this embodiment, client module 702 includes a plurality of manager modules including a navigation manager module 1401, a network manager module 1402, a TIL manager module 1403, an archive manager module 1404, a local manager module 1405, an event manager module 1406, a timer manager module 1407, a user interface manager module 1408, a memory manager module 1409, and a device dependent module 1410.

Navigation manager module 1401 handles card and deck navigation as well as managing any caches. Navigation manager module 1401 owns and manages a history list and as well as a pushed card list. In addition, navigation manager module 1401 functions as the main line of client module 702; does all event distribution; and supports local services.

For local services, like local message store, there are two basic approaches that can be used. First, local services are implemented in a CGI-like

manner. Each local service has an entry point which is called with an argument list. A TIL deck is returned via the event manager. From that point on, the TIL deck is processed in the standard manner. This approach limits local services to the same constraints as remote services. A less restrictive approach is to allow the local service to field events instead of the standard event loop. The local service would construct TIL cards on-the-fly and feed them to user interface manager 1406. Note that the local service would need to cooperate with the standard event loop with regard to the history, the pushed card list, and any other state that is normally managed by the event loop. Table 4 is a listing of processes for the architecture for navigation manager module 1401.

TABLE 4  
ARCHITECTURE FOR NAVIGATION MANAGER MODULE 1401

```

20  ProcessEvents (void);
    PushLocation (void * location, Boolean forStack);
    void * PopLocation (Boolean forStack);
    void * CurrentLocation();
    struct LOCAL_SERVICE {
25      char name[50];
        FUNC HandleEvent(Event * pevent);
        FUNC StartLocalService(void);
        FUNC StopLocalService(void);
    };
30  static LOCAL_SERVICE localServices[]={ ... };
    STATUS HandleEvent(Event * pevent);
    STATUS StartLocalService();
    STATUS StopLocalService();

35  Routine ProcessEvents is the main entry point for
    event processing in client module 702. Typical events

```

include key presses on the keypad, choice selection for a choice card, text entry for an entry card, network events, and history events. Routine ProcessEvents can be called at any time to process an event or events.

- 5 Routine ProcessEvents does not return until all events on a queue generated by event manager module 1406 are processed. If a local service is running, events are distributed to the local service before being processed by routine ProcessEvents.

- 10 The remaining routines in Table 4 are called internally to navigation manager module 1401 and by local services. Routine PushLocation pushes a location on the history list and issues a request for that location. The forStack flag indicates a stack push of  
15 local cards.

- Routine \*PopLocation pops a location on the history stack and issues a request for the top location of the history stack. In routine \*PopLocation the forStack flag indicates that all cards since the last  
20 stack push should be popped.

Routine \*CurrentLocation returns the current location the current URL being displayed.

- As shown in Table 4, each local service provides a number of functions. If a local service is running,  
25 function HandleEvent, the local service's event handler, is called before any processing by navigation manager module 1401. If the event is handled by the local service, the event is not processed any further.

- Function StartLocalService is the local services  
30 start function. Function StartLocalService is called before any events are distributed to the local function. Similarly, function StopLocalService is the stop function for the particular local service. Function StopLocalService is called when no more events  
35 are distributed to the local service.

Network manager module 1402 insulates the rest of



client module 702 from the specific networking protocol used over the cellular telephone network. Network manager module 1402 delivers requests to the server specified in the URL via the cellular telephone network interface; segments responses from the server for lower latency; delivers responses from local services to navigation module 1401 via event module 1406; handles request/response cycle (e.g. cancellation, retry strategy) with the server over the cellular telephone network; can receive asynchronous messages from the server; performs memory management of TIL decks; performs caching of TIL decks; handles all negotiations concerning protocols and server scaling with the server; handles any encryption for information exchanged between cellular telephone 700 and the server.

In some cellular telephone, the maximum message size is fixed. However, for UDP and TCP messages, a more direct interface is used that bypasses this limitation of message passing. It is important to avoid copying network data from memory buffer to memory buffer as such copying increases the memory "high water mark" as well as decreases performance. Since different cellular telephones have different interfaces for delivering network data, network manager module 1402 manages the network data. In this way, network data is only copied from the network buffer for long-term storage.

When a message or reply arrives, network manager module 1402 uses event manager module 1406 to report that fact. However, access to the data by other manager modules in client module 702 is through a protocol that allows storage of data in a variety of fashions on different telephones. Any transparent, short-term caching of TIL data is handled by network manager module 1402. Table 5 is one architecture for

network manager module 1402.

TABLE 5  
SPECIFICATION FOR NETWORK MANAGER MODULE 1402

```

5      typedef short TID;
      void NM_Init(void);
      void NM_Terminate(void);
      TID NM_SendRequest (void *requestData, int length,
10         Boolean ignoreCache);
      NM_CancelRequest (TID TRANSACTIONId);
      NM_DataType(TID TRANSACTIONId);
      NM_GetData(TID TRANSACTIONId, void *data, int
         *length, Boolean *complete);
15      void *NM_HoldData (TID TRANSACTIONId);
      NM_ReleaseData(TID TRANSACTIONId);
      TID NM_StartData(int data Type, char *requestData,
         int length);
      STATUS NM_EndData(TID TRANSACTIONId);
20      STATUS NM_SetDataLength (TID TRANSACTIONId, int
         length);
      STATUS NM_GrowDataLength (TID TRANSACTIONId, Int
         grow);
      int NM_GetDataLength(TID TRANSACTIONId);
25      void *NM_GetDataPointer (TID TRANSACTIONId);
      STATUS NM_DeliverData (TID TRANSACTIONId);

```

30 Network manager module 1402 identifies each network data transaction by a 16-bit transaction identification code TID. Network manager module 1402 increments transaction identification code TID by one for each new transaction. Transaction identification code TID rolls over after 0xffff.

35 Routine NM\_Init initializes network manager module 1402 and so is called before any other calls in

network manager module 1402. Routine NM\_Terminate closes processing of network manager module 1402 and so is called after all other calls in network manager module 1402.

5       Network manager module 1402 uses routine TID NM\_SendRequest as the standard process of sending a request to the server. Pointer \*requestData in the call to routine TID MN\_SendRequest is defined by the server protocol. Similarly, the state, e.g., the  
10   Boolean value, of variable ignoreCache is used to indicate whether any cached replies should be ignored. After sending the request, this routine returns a server transaction identification code TRANSACTIONId. A local service can also send a request to the server.

15       When the user instructs client module 702 to cancel a request, network manager module 1402 calls a routine NM\_CancelRequest with cellular telephone transaction identification code TID and server transaction identification code TRANSACTIONId. Routine  
20   NM\_CancelRequest issues a command to the server to cancel the specified request.

      When data are received from the network, the data can be either a response to a request sent by routine TID MN\_SendRequest, or by a local service.  
25   Thus, in response to receiving data from the server, network manager module 1402 generates an event that includes server transaction identification code TRANSACTIONId and the type of data DATAType. For replies to requests sent by routine TID MN\_SendRequest,  
30   server transaction identification code TRANSACTIONId is the same as the one returned by the matching call to routine TID MN\_SendRequest and data type DATAType indicates that the data is a response. For local service originated messages, server transaction ID is  
35   new, and data type DATAType depends on whether the data is an e-mail, pushed TIL, or another type.

After the network event is received by event manager module 1406, and navigation manager module 1401 distributes control of the event to network manager module 1402, network manager module 1402 users the  
 5 server transaction identification code TRANSACTIONId and the remaining routines in Table 5 to process the data.

Routine NM\_DataType is used to return the particular data type dataType, e.g, reply, MIME, server  
 10 push, etc. Routine NM\_GetData sets a pointer to the data identified by server transaction identification code TRANSACTIONId, retrieves the length of the data, and determines whether all the data has been received. The interface provided by this routine allows the first  
 15 part of a data stream, e.g. the first card of a TIL deck, to be processed by client module 702 before the rest of the deck is received.

Routine NM\_HoldData is called before calling routine NM\_GetData to hold the data and thus insure  
 20 that the data remains valid during processing by client module 702. If the data is not held, the data can be deleted or moved with the internal buffers of network manager module 1402. If the data is held, routine NM\_ReleaseData is called after network data has been  
 25 processed to release the data.

Routines TID NM\_StartData, NM\_EndData, NM\_SetDataLength, NM\_GrowDataLength, NM\_GetDataLength, NM\_GetDataPointer, and NM\_DeliverData are used  
 30 internally by network manager module 1402, and by local services to deliver data. By allowing local services to use these routines, the same buffers can be used to store both network and locally generated data thereby reducing the amount of memory required to support client module 702.

35 Routine TID NM\_StartData creates a new data transaction and triggers a data delivery event.

5 Routine NM\_EndData is called when all data for the  
given server transaction identification code  
TRANSACTIONId has been transmitted. Routine  
NM\_SetDataLength sets the data segment to a given  
length and may cause the location of the data to  
change. Routine NM\_GrowDataLength grows the data  
segment by a given length and also may cause the  
location of the data to change. Routine  
10 NM\_GetDataLength returns the length of the data  
segment. Routine NM\_GetDataPointer returns a pointer  
to the data. This routine is preferably called before  
writing into the data buffer. Also, this routine is  
preferably called whenever the data's location may have  
changed. Routine NM\_DeliverData can be called when at  
15 least one card has been stored to reduce latency while  
the other cards are being generated.

TIL manager module 1403 insulates the rest of  
client module 702 from changes to the TIL  
specification. The interface provided by TIL manager  
20 module 1403 has the following characteristics: removes  
the need for parsing by the rest of client module 702;  
uses cursors to avoid generating data structures  
on-the-fly; does not need an entire deck to operate;  
and handles TIL versioning.

25 Each TIL deck contains a major and a minor version  
number. The minor version number is incremented when  
TIL changes in a way that does not break existing TIL  
manager modules. The major version number is  
incremented for non-compatible versions of TIL.

30 Each TIL deck has the same hierarchy. One  
embodiment of this hierarchy is presented in Table 6.  
In Table 6, indentation is used to represent the  
relationships of the various hierarchical levels.

TABLE 6  
TIL DECK HIERARCHY

	deck
	options
5	softkeys
	options
	card
	options
	softkeys
10	options
	formatted text
	formatted lines
	entries
	options
15	formatted line

The interface presented in Table 7 for TIL manager module 1403 is designed with the assumption that TIL is a direct tokenization of PIDL as described in

20 Appendix I. However, the interface does not have any dependencies on that tokenization and can support other PIDL encoding techniques. Given the above assumption, the opaque pointers described below are actual pointers into the TIL deck itself. A rudimentary object typing

25 scheme based on where in the deck the opaque pointer points can be used to implement the generic functions described below. If this object typing is not feasible due to details of TIL encoding, the generic functions can be replaced with specific functions.

30

TABLE 7

ARCHITECTURE FOR TIL MANAGER MODULE 1403

```
typedef char *opaque;
typedef opaque Deck;
35 typedef opaque Card;
typedef opaque Text;
```

```

typedef opaque Entry;
typedef opaque Option;
typedef opaque SoftKey;
typedef opaque Object;

5
/* Generic functions */
    FirstOption(Object obj, Option *o);
        /* obj is a card, softkey, entry, or deck */
    GetSoftkey(Object obj, Option *o);
10        /* obj is a card or deck */
    GetText(Object obj, Option *o);
        /* obj is a card or entry */

/* Deck functions */
15    SetDeck(Deck d, int length);
        /* tells module which deck to use */
    DeckGetCard(Card *c, int num);
-or-
    DeckGetCard(Deck d, Card *c, int num);
20
/* Card functions */
    int CardType(Card c);
    CardFirstEntry(Card c, Entry *e);
    CardLookupSoftkey(Card c, int num, Softkey *s);
25    CardIsLast(Card c);

/* Option cursor functions */
    OptionNext(Option *o);
    char *OptionKey(Option o);
30    char *OptionValue(Option o)

/* Entry cursor functions */
/* Text (and image) cursor functions */
    TextNextToken(Text *t, int *type, int *subtype,
35        int *length, char *data);

```

Archive manager module 1404 stores and retrieves long-lived information. This information includes: data related to the server's location and/or required to support server scaling; data related to encryption; TIL caching (transparent to user); TIL storage (specified by user); and message storage and retrieval (see local manager module). Archive manager module 1404 should support a variety of nonvolatile memory schemes that are provided by the two-way data communication devices.

Local manager module 1405 is an interface to local device resources, such as local messages, address book entries, and preconfigured e-mail replies. Local manager module 1405 should also define an abstract interface to navigation manager module 1401 for use by archive manager module 1404.

Table 8 is an architecture for an interface within local manager module 1405 to access to an address book stored on cellular telephone 700. The name of a routine in Table 8 is descriptive of the operations performed by the routine.

TABLE 8  
ARCHITECTURE FOR ADDRESS BOOK ACCESS

```

25  int NumAddresses();
    char *AddressName(int num);
    char *AddressGetEMail(int num);
        // returns e-mail address
    char *AddressGetPhone(int num);
30  // returns phone number
    char * AddressGetFax(int num);
        // returns fax number
    SetAddress(int num, char *name, char *email,
                char *phone, char *fax);
35  DeleteAddress(int num);
    InsertAddress(int before);

```



Table 9 is an architecture for an interface within local manager module 1405 to access predetermined replies stored on cellular telephone 700. The name of a routine in Table 9 is descriptive of the operations performed by the routine.

TABLE 9  
ARCHITECTURE FOR PREDETERMINED REPLY ACCESS

```

10      int NumReplies();
        char * GetReply(int num);
        DeleteReply(int num);
        SetReply(int num, char *text);
        InsertReply(int before);

```

Table 10 is an architecture for an interface within local manager module 1405 to access messages stored locally on cellular telephone 700. The name of a routine in Table 10 is descriptive of the operations performed by the routine.

TABLE 10  
ARCHITECTURE FOR LOCALLY STORED MESSAGE ACCESS

```

25      int NumMessages();
        void *FirstMessage();
        void *NextMessage();
        int MessageType(void *msg);
           // e.g. e-mail, TIL, etc.
30      void *MessageContent(void *msg);
        void *SaveMessage(int type, void *content, int
                           contentLength);
        DeleteMessage(void *msg);

35      Event manager module 1406 handles the distribution
        of events. In this embodiment, events include

```

low-level events like key presses and higher level navigation and user interface events. There are typically only a small number of events at any one time. The main event loop in the two-way data communication device dependent module keeps calling EM\_GetNextEvent() until no events are left in the queue. Note that processing one event can cause another event to be pushed onto the queue. The main event loop is not restarted until another event is pushed onto the queue due to a user key press or a network event.

In this embodiment, the event types include:

- 1) keypad events, i.e., pressing of a key;
- 2) choice events relating to a current choice card, e.g., the user selecting choice three;
- 3) text entry events relating to a current entry card, e.g., the user keying in "Hello";
- 4) network events, e.g., response arrived, request arrived, transaction terminated, network status; and
- 5) history events, e.g., pop, pop to marker.

Table 11 is an architecture for event manager module 1406. As in the other tables herein, the name of a routine in Table 11 is descriptive of the operations performed by the routine and in addition a brief description is given in the comment field.

TABLE 11

ARCHITECTURE FOR EVENT MANAGER MODULE 1406

```
struct Event {
    int type;
    void *data;
    /* e.g. keycode, choice num, entry
       text, status code, other data */
}
```

```

    }
    EM_QueueEvent(int type, void * data);
        /* Adds event at end of queue*/
    EM_GetNextEvent(Event * event);
5       /*Pops next event*/
    EM_PeekNextEvent(Event event);
        /*Peeks at next event*/

```

10 Timer manager module 1407 allows timer events to support timeouts, animation, and other time-domain features. Timeouts are delivered via event manager module 1406.

15 Table 12 is an architecture for timer manager module 1407. As in the other tables herein, the name of a routine in Table 12 is descriptive of the operations performed by the routine.

TABLE 12  
ARCHITECTURE FOR TIMER MANAGER MODULE 1407

```

20  TimerInit();
    int TimerSet(int milliseconds, int code, void
        *clientData);
        /*Returns a timer identification timerId to
25         be used for cancellations*/
    TimerCancel(int timerId);
    TimerCancelAll()

```

30 User interface manager module 1408 handles interactions with the keypad and the display. Each of the three types of user interfaces defined in Table 1 above requires a different version of user interface manager module 1408. For most cellular telephones,

35 only one card at a time is used. However, some cellular telephones can display multiple cards at once

and so would require a different version of user interface manager module 1408 from the version that handled display of only one card at a time.

In this embodiment, user interface manager module provides a user interface for the three types of cards display, choice, and entry; provides hooks for custom user interfaces for the address list and e-mail reply entry; only cares about the user interface aspects of cards and provides no navigation, argument, or option processing; handles all text and graphic layout including word wrapping; handles scrolling of text; operates from PIDL data structures; generates keyboard events, some of which may be generated by soft keys; and generates high-level events, e.g. next card, choice entry 3, text entry "IBM".

Table 13 is an architecture for processing cards by user interface manager module 1408. As in the other tables herein, the name of a routine in Table 13 is descriptive of the operations performed by the routine.

TABLE 13  
ARCHITECTURE FOR CARD PROCESSING  
BY UI MANAGER MODULE 1408

```
void UI_StartCard(Card c);
    /* called to begin display and processing of
       a given card*/
void UI_EndCard(Card c);
    /*called when a card is no longer to be
       displayed*/
Boolean UI_HandleEvent(Event *pevent) ;
    /*returns true if the event is handled, false
       if not*/
```

Table 14 is an architecture for the user interface implementation by user interface manager

module 1408. As in the other tables herein, the name of a routine in Table 14 is descriptive of the operations performed by the routine.

5

TABLE 14  
ARCHITECTURE FOR UI IMPLEMENTATION  
BY UI MANAGER MODULE 1408

```

10      UI_ LayoutCard(Card c, Boolean draw, Proc
                                callback)
        /* relies on global data; needs to be able
           to: draw as it goes; and note the
           special function of the currentLine
           (e.g. none, choice, softkey)*/
15      int numLines, firstVisible, lastVisible,
                                currentLine;

        char currentEntry[80];
        int currentChoice;
        void *currentSoftkey;
20      Card currentCard; and
        ... other info as needed for in-line
            scrolling

```

The callback routine is notified of the special

25 function of each line as the line is laid out. Thus, routine UI\_LayoutCard can be used to scroll to a particular choice. If the current line is too wide to display all at once, horizontal scrolling is used to display the complete line, one display width at a time.

30 Memory manager module 1409 is optional, and is used in two-way data communication devices that do not support dynamic memory allocation. In these devices, all memory allocation and releases must go through memory manager module 1409. Also, by allocating memory

35 in advance via memory manager module 1409, client module 702 does not run out of memory due to some other

process on the device using up memory.

Microfiche Appendix A is a computer source code listing in the C++ computer language of one embodiment of a client module within a cellular telephone, and one  
5 embodiment of an airnet network translator that was used with an Internet server to communicate with client module. The Internet server was a UNIX computer running the Mosaic HTTP server. The source code was used to generate executable code by compiling the  
10 source code on a computer running the Sun Microsystems Operating System Solaris 2.4 using Sun Microsystems compiler SunPro C and C#, and the Sun Microsystems SDK make utility. All of these products are available from Sun Microsystems of Mountain View, California.

15 This application is related to copending and commonly filed U.S. Patent Application Serial No. 08/XXX,XXX entitled "A PREDICTIVE DATA ENTRY METHOD FOR A KEYPAD" of Alain Rossmann, which is incorporated herein by reference in its entirety.

20 Various embodiments of a novel interactive two-way data communication system, a two-way data communication device, an airnet network architecture, and a predictive text entry system have been described herein. These embodiments are illustrative only of the  
25 principles of the invention and are not intended to limit the invention to the specific embodiments described. In view of this disclosure, those skilled in the art will be able to use the principles of this invention in a wide variety of applications to obtain  
30 the advantages of this invention, as described above.

## APPENDIX I

## A DESCRIPTION OF PIDL AND TIL

Unpublished © 1995 Libris, Inc.

5

The main structure of PIDL is described by an abstract syntax. This appendix describes the elements of the language and their semantics. In the syntax description of each element, an element is defined in an enhanced BNF.

10

a :: = b	the element a is defined as b
a :: = b :: = c	the element a is defined as b or c
b c	the element b followed by element c, the intervening space is just for clarity
a b c	element a or element b or element c
{a}	the element a is optional
{a}*	the element a may appear zero or more times in a row
{a}+	the element a may appear one or more times in a row
<u>abc</u>	the characters abc literally
ol(a)	an option list with zero or more topions of the element a, see Options below

15

20

25

In general, the element blank-space can optionally appear between any two other elements. To keep the diagram clear, it has been omitted except where required. Where a blank-space is illegal or treated specially, it is noted.

## The PIDL ELEMENTS

```

deck ::= deck-header {softkey}* {card}+ deck-
      footer
5    deck-header ::= <PIDL ol(deck-options) >
deck-options ::= o-args | o-cost | o-ttl
deck-footer  ::= </PIDL>

```

10 A deck consists of one or more cards.  
 There must be at least one card. A deck  
 may also have a number of softkeys  
 defined that stay in force for the whole  
 deck. See soft keys below for the  
 syntax and full description.

```

15    o-cost  ::= cost= value
       o-ttl  ::= ttl= integer

```

20 Additional arguments to be passed on the  
 next deck request are given in o-args.  
 See Arguments below for syntax and full  
 description.

25 The cost of retrieving this page  
 (exclusive of telephone system charges)  
 is represented in o-cost. If no o-cost  
 is given, the deck cost is included with  
 the user's standard service contract.

30 Decks can be cached by the cellular  
 telephone for a period of time. The o-  
 ttl entry indicates the number of  
 seconds that the deck can be cached from  
 time of reception. If no o-ttl entry is  
 35 given, the deck can only be cached for  
 short periods of time, for example, to



implement a back function similar to that of most Web browsers. If the value of o-ttl is zero, the deck must not be cached.

5

#### CARD ELEMENTS

card ::= display-card | choice card | entry-card

10

A card is one of three types of card in this embodiment. These are described in the sections below.

card-options ::= o-name | o-next | o-prev

o-name ::= **name=** identifier

15

o-next ::= **next=** destination

o-prev ::= **prev=** destination

20

All cards can have these options. The optional o-name option gives a name to the card. If a card has a name, the card can be referred to by a destination.

25

The o-next and o-prev give destinations for the NEXT and PREV keys. If omitted, the defaults are the next and previous sequential card in the deck. If o-prev is omitted from the first card, the PREV key returns to the deck last visited. If o-next is omitted from the last card, the NEXT key returns to the first card of the current deck. However, this default behavior is only a fail-safe: the last card in a deck should always have either an o-next option, or be a choice card where each choice entry indicates a new destination.

35

## DISPLAY CARD

5        display-card ::= display-header display-content  
display-footer

display-header ::= <DISPLAY option-list >

display-options ::= card-options

display-content ::= { softkey } \* formatted text

display-footer ::= </DISPLAY>

10        Display cards give information for the  
user to read. See Formatted Text below  
for a full description of the format of  
information that can be displayed.  
Softkeys can be described for this card  
only, see Softkeys below.

## CHOICE CARD

choice-card ::= choice-header display-content  
{ entries } choice-footer

20        choice-header ::= <CHOICE ol{choice-options} >

choice-options ::= card-options | o-method | o-key  
| o-default

o-method ::= method= method-type

method-type ::= number | list | alpha | group

25        entries ::= { choice-entry } +

::= { group-entry { choice-entry } + } +

choice-footer ::= </CHOICE>

30        Choices let user pick one from a list.  
The initial display content is shown to  
the user, followed by the choices. Each  
choice can have one line of formatted  
text (which may be wrapped or scrolled  
by the phone if too long).

35        How the choices are displayed and chosen

is based on the o-method option. Note that this option is a hint only, and can be disregarded by the phone. The number method is the default and indicates that the choices are numbered sequentially from one and are chosen by pressing the appropriate digit on the keypad. If there are more than nine options, the phone may choose some other method of selection. The list method indicates that the list should be unnumbered and that the user should scroll through the list and hit some designated enter key to choose an entry. The alpha method is like list, only it is an indication that the text of the entries should be used to aid selection if at all possible. In this case, the entries are assumed to be alphabetically sorted. The group method is described in more detail below.

The o-key option indicates, if present, the key of an argument to be added to the argument list. See Arguments below for more information. The value of the argument comes from the choice entry; see below. The o-default option indicates the default value if the user just hit ENTER. See o-default under Entry Card below for more information.

choice-entry ::= <CE ol(entry-options) >  
formatted-line

entry-options ::= action-options | o-value

Each choice has text displayed to the user. If the action-options are given,

the indicated action is performed if the choice is made. If the o-value option is present, it supplies the value to the argument identified with the o-key option in the choice header. If no o-value is given, the text of the entry is used (without any formatting) as the argument value.

10

```
group-entry ::= <GE ol(group-options) >
group-options ::= label= value
```

If the group method is used, the choices are divided into a number of groups.

15

Each group is headed by a group-entry, which, via the label option, gives a short name to the group. The phone can then give the user a hierarchial interface for choosing among a large number of choices. The text of the label should be limited to eight characters and may be truncated by the phone.

20

25

#### ENTRY CARD

```
entry-card ::= entry-header display-content entry-
            footer
entry-header ::= <ENTRY ol(entry-options) >
entry-options ::= card-options | o-format | o-key
                | o-default
entry-footer ::= </ENTRY>
```

30

35

Entries let the user enter a value. The display content is shown to the user, followed by an entry line. The user's entry is controlled by the format. The o-key option indicates the argument that

is being set by this entry. The value of the argument are the user's entry.

```

5      o-format ::= format= value { ; format-hint }
      format-hint ::= value

```

This option specifies the format for user input entries. The string consists of format control characters and static text which is displayed in the input area. Most of the format control characters control what data is expected to be keyed in by the user. They are displayed as blanks until the user types into them.

10

The format codes are:

```

15      A      entry of any alphabetic
           character
           9      entry of any numeric character
           X      entry of any alphabetic or
20           numeric character
           *f     allow entry of any number of
           characters; the next character,
           f, is one of A, 9 or X and
25           specifies what kind of
           characters can be entered.
           \c     display the next character, c,
           in the entry field; allows
           display of the formatting
30           characters in the entry field.

```

Format hints indicate what kind of value is expected. If a format hint is not understood, it is ignored. Currently defined format hints are:

35

5                   text                   text is expected to be  
   text, use special  
   input techniques;  
   generally follows **\*A**  
   or **\*X**

10                   mail-reply           like text, but  
   expected text is for  
   an e-mail message or  
   page; may affect input  
   algorithm

  address-list   entry is a list of  
   e-mail addresses

15                   o-default   **::= default=** value  
   The o-default option supplies a value  
   that is used if the user simply hits  
   NEXT. If no default value is given,  
   then the user must supply a value.

20                   FORMATTED TEXT

  formatted-text   **::= { { flow-image } { line-format }  
   text-line }\***

  formatted-line   **::= text-line**

  text-line       **::= { text | image | text-format |  
   alignment-format }\***

25   Formatted text is what is shown to the  
   user in most cards. Formatted lines are  
   used for choice entries.

30                   text-format   **::= <B> | <I> | <BL>**  
   **::= </B> | <I> | <BL>**  
   The format codes control Bold, Italic  
   and Blinking. The slash versions cancel  
   the formatting. Unlike HTML, these

35   needn't be strictly nested and over  
   application and over cancellation are

tolerated. Formatted-text and formatted-line elements start in plain mode (no bold, italic, or blinking).

5 alignment-format ::= <CENTER> | <BOLD> | <TAB>

10 The alignment codes specify how parts of a line are to be laid out. The text following the alignment code is either centered or right justified on the same line as the other text. The text or image following the code is considered to be all text up to the next alignment code or line break. All lines start implicitly aligned left. Note that  
15 these do not include an implicit line break so that one can have both left and right justified text on a single line. If there is too much text and not enough room on the line then, if in wrap mode,  
20 the non-fitting text is moved to the next line and aligned the same way. If in line mode, the line may end up running together with two spaces between the left, center, and right justified  
25 segments.

30 The tab code is used to create aligned columns. Rather than tab to specific character positions, the tab code separates the text for each column. The width of the column is determined by the maximal width of the text (or images) in each line. The extent of the columns is from the first line with tab codes  
35 through the last contiguous line with tab codes. Some lines may have fewer

tab codes than others, in which case they are assumed to have no text for the extra columns.

5           line-format    ::= <WRAP> | <LINE>  
              ::= <BR>

Multiple lines of text are separated by the <BR> code. If a line is too long to fit on the screen and, if in wrap mode, the line is word wrapped onto multiple lines. If in line mode, the line is left as one line and is scrolled horizontally. Formatted-text and formatted-line elements start in wrap mode and may be changed with either the <WRAP> or <LINE> codes. These codes are an implicit line break.

20                           IMAGES

          image       ::= <IMAGE ol(image-options) >  
                      ::= <INLINE ol(image-options) >  
                      inline-data </INLINE>

          flow-image   ::= <IMAGE ol(flow-image-options) >  
25                       ::= <INLINE ol(flow-image-options) >  
                      inline-data </INLINE>

          image-options   ::= o-source

          flow-image-options   ::= image-options | o-flow

          inline-data       ::= *ASCII85 encoding of image data*

30

Images are treated as large words and, by default, are simply displayed as part of the text. Flow-Images have a flow option that causes them to be treated differently. The image data is stored in a separate data stream as identified

35



by the source option.

Inline images are treated identically, only the data is part of the current data stream. ASCII85 is a standard way of encoding binary data in printable ASCII, whereby each four bytes of data is encoded in five characters. Note that TIL only uses inline images, and uses a different encoding.

**o-source ::= src= location**

This option specifies the location of the source for images.

**o-flow ::= flow= { left | right }**

This option controls the alignment of flow-images. The option specifies that the image is flush left or flush right with the screen. Subsequent lines of text flow in the remaining right or left hand space.

#### SOFTKEYS

**softkey ::= <SOFTKEY ol(softkey-options) >**

**softkey-options ::= o-label | o-button | action-options**

Softkeys supply definitions for two buttons known as SOFT-L and SOFT-R. They do not show up in the normal text and graphics area displayed to the user, but on a separate line for soft key labels. (Note: in some implementations, where screen real estate is scarce, this label line may get used for normal text

and graphics display when there are no softkeys defined on the current card).

When the softkey is pressed, the indicated action takes place.

```
o-button ::= button= side
        side ::= left | right
o-label  ::= label= value
```

The button option specifies which physical key the softkey applies to. The label option is the text that is displayed on screen for that key. The phone may truncate the label. It is suggested that labels be fewer than eight characters.

Softkeys can be specified both for the deck as a whole and per card. When specified for the deck (after the deck-header, but before the first card) they remain in effect for the entire deck. When specified for a card (at the beginning of the formatted-text for the card), they temporarily override any deck softkeys while the card is visible. Note that the override is done independently for the two keys (a card can override one softkey, but not the other). To override a deck softkey with no softkey (in effect, to remove a softkey for the duration of a card) use a softkey with no label and no action.

SYNTAX: OPTIONS

Many of the syntactic elements of PIDL have option lists associated with them. Options refine the operation of the elements they are part of. Unless otherwise noted, options do not nest, even when the same option is given in two nested elements. Options that are not defined for an element are ignored, even if valid for an enclosing element.

5

```
ol(valid-option) ::= { blank-space valid-option }*
                  {blank-spaces }
```

```
option-list ::= ol(option)
```

```
option ::= key = value
```

15

```
key ::= identifier
```

```
value ::= plain-text
```

```
::= " { text } "
```

20

An option list contains zero or more options. Each option is separated by blank-space (required!) and optionally followed by blank-space. In the syntax diagrams, option lists are shown as: ol(valid-option) where valid-option is replaced with an element that defines the possible options in this context. ol is a generic syntactic description of option-lists.

25

30

Each option is a key and a value. They may be given in any order within the list of options. The key is always an alpha-numeric name that is case insensitive. The value, if it is composed of only alphanumeric characters, may appear directly after the equals sign. Otherwise, the value

35

must be quoted. In quotes, blank-space is treated literally and is considered part of the value.

5 In the syntax diagrams, the possible values for various options are specified without quotes. However, quotes are always acceptable around an option value.

10 Unlike almost all other syntactic elements, blank space is **not** permitted between the key and the equals sign or between the equals sign and the value.

15 Many options have a more restricted set of possible values than represented by the above syntax. See the individual options for details.

20

#### DESTINATIONS

```
destination ::= location { ; animation }
              ::= card-loc { ; animation }
              ::= stack-operation { ; animation }
```

25

```
location ::= full-loc | partial-loc
           | relative-loc
```

```
full-loc  ::= : service-id / deck-path
           ::= : service-host / deck-path
```

30

```
partial-loc ::= / deck-path
relative-loc { ../ } * deck-path
```

```
card-loc  ::= # identifier
```

35

```
deck-path  ::= plain-text { / plain-text } *
service-id ::= % plain-text
```

service-host ::= plain-text

Destinations are used in some options to indicate the next, or previous deck or card to show. A deck is specified either with a full location (service-id and deck-path), just a deck-path (in which case the service is the same as the current deck's service), or a relative deck-path. In the later case, the last component of the current deck-path is removed, (and one additional component for each ../ in the relative deck-path), and the deck-path appended.

A particular card can be a destination and is specified by a card-loc element.

stack-operation ::= + card-loc

::= -

In addition to the normal history list of where a user has been that is kept by a phone, the phone also keeps a short stack of locations. Using a plus sign form causes the current location (deck and card, and location in the history list, and animation used) to be pushed on the stack before going to the new card. Using the minus sign form causes a return to the location on the top of the stack, and the history list to be pruned back to the saved point. If no animation is given, the inverse animation is used. The stack is popped.

animation ::= **slideN** | **slideS**

```

::= slideW | slideE
::= slideSW | slideNE
::= slideSE | slideNW
::= flipV
5 ::= flipH
::= fade
::= none

```

The optional animation argument indicates what form of screen animation, if available, is to be used when going to the destination. The animation is remembered with the destination in the history and destination stack. If the user moves to a destination via a 'go' or 'next' operation, then the animation is performed. If the user moves to a destination via a 'prev' or 'pop' operation, the reverse animation associated with the current location is performed.

#### ACTIONS

Choice entries and soft keys can specify actions to be performed when the user selects the choice or softkey.

```

action-options ::= o-args | o-call
                | o-page

```

```

o-go ::= go= destination
o-call ::= call= value

```

The go operation indicates that the destination should be moved.

#### ARGUMENT PROCESSING

Each time a deck is requested, arguments may be passed along with the request.

These arguments may be used by the service end to compute a deck specific for the user rather than just return a pre-written deck.

5

10

Arguments are built-up as the user traverses the deck. Each argument is a key-value pair. While arguments superficially look like options, these two entities are quite distinct: Options are a part of PIDL and affect the operation of the phone. Arguments are information gathered by the phone and returned to the service. Neither PIDL nor the phone understands the arguments beyond their basic syntactic structure.

15

20

Arguments come from three places: Choice cards, Entry cards, and the args option. Each of these specifies a key-value pair that is added to a buffer of arguments to be sent. In the case of the args option, multiple arguments may be specified. When an argument key-value pair is added to the argument buffer, if the key is already present in the buffer, its value is replaced.

25

30

```

o-args ::= args= arg-list
argument-list ::= arg-key-value { { & | ; }
key-value }*
arg-key-value ::= arg-key = arg-value
arg-key ::= identifier
arg-value ::= plain-text

```

35

Note: The entire o-args element is

actually the value of an option. If it has more than one arg-key-value it will need to be in quotes. Since the ampersand (&) and semi-colon (;) are used as key-value pair separators, these characters cannot be part of argument values.

o-key ::= **key=** arg-key  
o-value ::= **value=** arg-value

These options are used in choice and entry cards to specify the key and value for the arguments those cards set.

#### BASIC ELEMENTS

alpha ::= any alphabetic character  
numeric ::= any digit  
alpha-numeric ::= alpha | numeric  
hex ::= numeric | any letter A through F,  
either case  
blank-space ::= { space | tab | new-line }+  
space ::= the space character  
tab ::= the tab character  
new-line ::= the carriage return character  
::= the line feed character  
::= the sequence carriage return, line  
feed  
  
word ::= { alpha-numeric }+  
identifier ::= alpha { alpha-numeric }\*  
integer ::= { + | - } { numeric }+  
  
text ::= any 7-bit ASCII character except <,  
>, ", or &  
::= &gt; | &lt; | &quot; | &amp;



| &nbsp; ;

::= any ISO-Latin-1 named entity

::= &# hex hex ;

In text, runs of blank-space are treated as single spaces and may be used as point for word wrapping.

plain-text

safe ::= { alpha | numeric | safe }\*  
 ::= \$ | - | \_ | @ | . | & | !  
 | \* | ,

#### TIL ENCODING

Except where noted, TIL is identical to PIDL in structure. To translate PIDL to TIL several steps are conceptually needed (these may be done in one pass by a translator):

1. Escape characters with the high bit set.
2. Compress or remove all blank space where possible.
3. Tokenize comment elements with a single byte with the high bit set.
4. Inline images.

Fundamentally, TIL is just PIDL with certain common character sequences replaced by single bytes with the high-bit set. The first two steps above support this. Additionally, images are further compacted by including them inline in a dense format.

The tokenizing follows the encoding

5

given in the table below. Note that for purposes of element separation, the tokens that represent option key identifiers (with the equal sign) can be considered to include all preceding blank space. Similarly, the tokens that represent option values can be considered to include all following blank space.

10

5

10

15

20

25

<PIDL>	90	args=	C0	alpha	EO
</PIDL>	91	button=	C1	center	E1
<DISPLAY>	92	call=	C2	fade	E2
</DISPLAY>	93	cost=	C3	flipH	E3
<CHOICE>	94	default=	C4	flipV	E4
</CHOICE>	95	flow=	C5	group	E5
<ENTRY>	96	format=	C6	inline	E6
</ENTRY>	97	go=	C7	left	E7
<CE	A0	key=	C8	list	E8
<GE	A1	label=	C9	none	E9
<IMAGE	A2	method=	CA	number	EA
<INLINE	A3	name=	CB	right	EB
<SOFTKEY	A4	next=	CC	slideE	EC
<B>	B0	page=	CD	slideN	ED
</B>	B1	prev=	CE	slideNE	EE
<I>	B2	src=	CF	slideNW	EF
</I>	B3	ttl=	D0	slideS	F0
<BL>	B4	value=	D1	slideSE	F1
</BL>	B5			slideSW	F2
<CENTER>	B6			slideW	F3
<RIGHT>	B7				
<WRAP>	B8				
<LINE>	B9				
 	BA				

APPENDIX II  
 A COMPUTER PROGRAM TO GENERATE  
 A LETTER FREQUENCY TABLE  
 FOR USE IN THE PREDICTIVE DATA ENTRY PROCESS  
 5                   Unpublished © 1995 Libris, Inc.

```

/*   This program opens a text file selected by the
    user, generates the frequency table for that file,
    and then writes the frequency table to another
10   file also selected by the user.
*/

#include <stdio.h>
#include <string.h>
15  #include <console.h>
#include <assert.h>

typedef unsigned char byte;
20  typedef byte triplet[3];
typedef byte tristorage[27][27][27];

IncrementTrigram(triplet t, tristorage trigrams)
{
25   byte * pb;
   assert(t[0] < 27);
   assert(t[1] < 27);
   assert(t[2] < 27);
   pb = &trigrams[t[0]][t[1]][t[2]];
30   if (*pb < 255) *pb = *pb + 1;
   return *pb;
}

StoreTrigramValue(triplet t, tristorage trigrams, byte
35  value)
{

```

```

    assert(t[0] < 27);
    assert(t[1] < 27);
    assert(t[2] < 27);
    trigrams[t[0]][t[1]][t[2]] = value;
5   }

byte FetchTrigramvalue(triplet t, tristorage trigrams)
{
    assert(t[0] < 27);
10   assert(t[1] < 27);
    assert(t[2] < 27);
    return trigrams[t[0]][t[1]][t[2]];
}

15 byte DumpTrigram(triplet t, tristorage trigrams)
{
    byte value;
    assert(t[0] < 27);
    assert(t[1] < 27);
20   assert(t[2] < 27);
    value = FetchTrigramValue(t, trigrams);
    if (value != 0)
    {
        printf("%c%c%c = ", t[0] + 'a', t[1] + 'a', t[2] +
25   'a');
        if (value == 255) printf("****");
        else               printf("%3d", value);
    }
    return value;
30 }

int IdFromChar(short c)
{
    c = tolower(c);
35   if (c < 'a' || c > 'z') return 26;
    return c - 'a';

```

```

    }

    AddChar(tristorage trigrams, triplet t, byte b)
    {
5       byte value;
        unsigned short r;

        assert(b <= 26);
        if (b == 26) { t[0] = t[1] = t[2] = 26; return; }
10      t[0] = t[1];
        t[1] = t[2];
        t[2] = b;

15      value = FetchTrigramValue(t, trigrams);
        if (value == 255) return;

        #if 0
            if (value > 64) {
20                r = Random();
                if (value > 192 && r & 0xE000) return;
                else if (value > 128 && r & 0xC000) return;
                else if (value > 64 && r & 0x8000) return;
            }
25      #endif

        StoreTrigramValue(t, trigrams, value + 1);
    }

30  DumpTrigrams(tristorage trigrams)
    {
        int i, j, k;
        int x;
        triplet t;
35      x = 0;
        for (i = 0; i < 26; ++i)

```

```

    for (j = 0; j < 26; ++j)
        for (k = 0; k < 26; ++k)
        {
            byte value;
5           t[0] = i;
            t[1] = j;
            t[2] = k;

10          value = DumpTrigram(t, trigrams);

            if (value == 0) continue;
            if (++x == 6) {
                printf("\n"); x = 0;
15          }
            else
                printf(" ");
        }
    }

20  OSErr BuildTrigram(short refNum, tristorage trigrams)
    {
        OSErr err;
        triplet t;
25      t[0] = t[1] = t[2] = 26;

        while (true)
        {
            long count = 80;
30          char buf[80];
            int i;

            err = FSRead(refNum, &count, buf);
            if (count == 0) return err;
35          for (i = 0; i < count; ++i) {
                AddChar(trigrams, t, IdFromChar(buf[i]));
            }
        }
    }

```

```

    }
    if (err) return err;
}
return 0;
5 }

Handle OpenTrigrams(void)
{
    OSErr err;
10    OSType type;
    StandardFileReply reply;
    short refNum;
    short id;
    Handle h;
15    Str63 name;
    tristorage *trigrams;

    type = 'TEXT';
    StandardGetFile(nil, 1, &type, &reply);
20    if (!reply.sfGood) return nil;
    err = FSpOpenDF(&reply.sfFile, fsCurPerm, &refNum);
    if (err) return nil;

    memcpy(name, reply.sfFile.name, sizeof(name));
25    h = NewHandle(sizeof(tristorage));

    HLock(h);
30    trigrams = (tristorage *) (*h);
    memset(*trigrams, 0, sizeof(tristorage));

    BuildTrigram(refNum, *trigrams);
    FSClose(refNum);
35    DumpTrigrams(*trigrams);
    HUnlock(h);

```



```

    type = 'rsrc';
    StandardGetFile(nil, 1, &type, &reply);
    if (!reply.sfGood) return;
    refNum = FSpOpenResFile(&reply.sfFile, fsCurPerm);
5    if (refNum == -1) return;
    UseResFile(refNum);

    id = UniquelID('smrt');
    //id = 128;
10    AddResource(h, 'smrt', id, name);
    UpdateResFile(refNum);
    FSClose(refNum);
    return h;
}
15
main()
{
    OSErr  err;
    Handle  h;
20
    cshow(stdout);
    TEInit();
    InitDialogs(OL);
    InitCursor();
25    h = OpenTrigrams();

```

CLAIMS

I claim:

5

1. A two-way data communication system for communication between a computer and a two-way data communication device selected from a group consisting of a cellular telephone, a two-way pager, and a  
10 telephone, said two-way data communication system comprising:

a two-way data communication network;  
a server computer comprising:

15 a two-way data communication interface module coupled to said two-way data communication network; and

a server coupled to said two-way data communication interface module;

20 wherein said server receives a message including a resource locator from said two-way data communication network, and said resource locator includes an address of said server;

25 said server processes said message using said resource locator; and

said server transmits a response to said message over said two-way data communication network;

30 a two-way data communication device coupled to said two-way data communication network wherein said two-way data communication device is selected from the group consisting of a cellular telephone, a two-way pager, and a telephone, and further wherein said two-way data communication device  
35 further comprises:

a network interface module coupled to

said two-way data communication network; and  
an client module coupled to said network  
interface module;

5                wherein said client module  
                transmits said message including said  
                resource locator to said server over  
                said two-way data communication network;  
                and

10               said client module processes said  
                response to said message from said  
                server wherein said response includes  
                information for user interaction over  
                said two-way data communication network.

15               2.     A two-way data communication system as in  
                Claim 1 wherein said client module further comprises an  
                interpreter wherein said interpreter generates a user  
                interface using information in said response, and said  
                user interface includes at least one user data input  
20               option associated with a resource locator.

                3.     A two-way data communication system as in  
                Claim 2 wherein said resource locator associated with  
                said at least one user data input option addresses an  
25               object on said server computer.

                4.     A two-way data communication system as in  
                Claim 2 wherein said resource locator associated with  
                said at least one user data input option addresses an  
30               object on another server computer coupled to said two-  
                way data communication network.

                5.     A two-way data communication system as in  
                Claim 1 wherein said interpreter includes a plurality  
35               of managers including a user interface manager coupled  
                to a display of said two-way data communication device

wherein said user interface manager handles interactions with said display.

6. A two-way data communication system as in  
5 Claim 5 wherein said user interface manager is coupled to a keypad of said two-way data communication device and further wherein said user interface manager handles interactions with said keypad.

10 7. A two-way data communication system as in Claim 6 wherein upon input of data from said keypad, said interpreter generates another message including another resource locator wherein said another resource locator includes said address of said server and said  
15 input data.

8. A two-way data communication system as in Claim 7 wherein said another resource locator including said address of said server and said input data  
20 comprises a uniform resource locator.

9. A two-way data communication system as in Claim 1 wherein said response includes a plurality of resource locators and at least one of said plurality of  
25 resource locators includes an address to another server coupled to said communication network.

10. A two-way data communication system as in Claim 1 wherein said server is a stateless server and  
30 upon said server completing transmission of said response, said server completes all processing of said request and retains no state information for said response.

35 11. A two-way data communication system as in Claim 1 wherein upon said server completing

transmission of said response, said server maintains state information concerning said message wherein said server utilizes said state information concerning said message in response to another message from said two-way data communication device.

12. A two-way data communication system as in Claim 1 wherein said two-way data communication device further comprises:

10           a memory; and  
            a resource locator stored in said memory.

13. A two-way data communication system as in Claim 1 wherein said server computer further comprises:

15           a memory; and  
            at least one common gateway interface program stored in said memory.

14. A two-way data communication system as in Claim 1 wherein said server computer further comprises:  
20           a memory; and  
            at least one card deck stored in said memory.

25           15. A two-way data communication system as in Claim 14 wherein said at least one card deck includes a display card.

30           16. A two-way data communication system as in Claim 14 wherein said at least one card deck includes a choice card.

35           17. A two-way data communication system as in Claim 14 wherein said at least one card deck includes an entry card.

18. A two-way data communication system as in Claim 1 wherein said client module further comprises a predictive text entry module.

5           19. A two-way data communication system as in Claim 1 wherein said two-way data communication device further comprises:

          a keypad having a plurality of keys; and  
          a keypad module coupled to said keypad and to

10           said client module

          wherein upon a user pressing a key in said plurality of keys, said keypad module stores information identifying the pressed key in a memory; and

15           said keypad module notifies said client module of said key press.

20           20. A two-way data communication system as in Claim 19 wherein said client module further comprises a predictive data entry module, wherein said client module uses said predictive data entry module to process said stored information identifying the pressed key upon said client module receiving said notification of said key press.

25           21. A two-way data communication system as in Claim 19 wherein said two-way data communication device further comprises:

30           a card deck stored in said memory of said two-way data communication device.

          22. A two-way data communication system as in Claim 21 wherein said at least one card deck includes a display card.

35           23. A two-way data communication system as in

Claim 21 wherein said at least one card deck includes a choice card.

24. A two-way data communication system as in  
5 Claim 21 wherein said at least one card deck includes an entry card.

25. A two-way data communication system as in  
Claim 1 wherein said two-way data communication device  
10 further comprises:

a display; and  
a display module coupled to said display and  
to said client module wherein said display module  
drives said display in response to user interface  
15 information from said client module.

26. A two-way data communication system as in  
Claim 19 wherein said two-way data communication device  
further comprises:

20 a display; and  
a display module coupled to said display and  
to said client module wherein said display module  
drives said display in response to user interface  
information from said client module.

25 27. A two-way data communication system as in  
Claim 1 wherein said two-way data communication device  
is said cellular telephone.

30 28. A two-way data communication system as in  
Claim 1 wherein said two-way data communication device  
is said two-way pager.

29. A two-way data communication system as in  
35 Claim 1 wherein said two-way data communication device  
is said telephone.

30. A two-way data communication system for communication between a server computer and a cellular telephone, said two-way data communication system comprising:

5 a data capable cellular telephone communication network;

a server computer comprising:

10 a two-way data communication interface module coupled to said data capable cellular telephone communication network; and

a server coupled to said two-way data communication interface module;

15 wherein said server receives a message including a resource locator from said data capable cellular telephone communication network wherein said resource locator includes an address of said server;

20 said server processes said message using said resource locator; and

said server transmits a response to said message over said data capable cellular telephone communication network;

25 a cellular telephone coupled to said data capable cellular telephone communication network wherein said cellular telephone further comprises:

30 a network interface module coupled to said data capable cellular telephone communication network; and

an client module coupled to said network interface module;

35 wherein said client module transmits said message including said resource locator to said server over said data capable cellular telephone



communication network; and

said client module processes said response to said message from said server wherein said response includes information for user interaction over said data capable cellular telephone communication network.

31. A two-way data communication system as in Claim 30 wherein said client module further comprises an interpreter wherein said interpreter generates a user interface using information in said response and further wherein said interface includes at least one user data input option associated with a resource locator.

32. A two-way data communication system as in Claim 31 wherein said resource locator associated with said user data input option addresses an object on said server computer.

33. A two-way data communication system as in Claim 31 wherein said resource locator associated with said user data input option addresses an object on another server computer coupled to said data capable cellular telephone communication network.

34. A two-way data communication system as in Claim 30 wherein said interpreter includes a plurality of managers including a user interface manager coupled to a display of said cellular telephone wherein said user interface manager handles interactions with said display.

35. A two-way data communication system as in Claim 34 wherein said user interface manager is coupled

to a keypad of said cellular telephone and further wherein said user interface manager handles interactions with said keypad.

5           36. A two-way data communication system as in Claim 35 wherein upon input of data from said keypad, said interpreter generates another message including another resource locator wherein said another resource locator includes said address of said server and said  
10 input data.

          37. A two-way data communication system as in Claim 36 wherein said another resource locator including said address of said server and said input  
15 data comprises a uniform resource locator.

          38. A two-way data communication system as in Claim 30 wherein said response includes a plurality of resource locators and at least one of said plurality of  
20 resource locators includes an address to another server coupled to said communication network.

          39. A two-way data communication system as in Claim 30 wherein said server is a stateless server and  
25 upon said server completing transmission of said response, said server completes all processing of said request and retains no state information for said response.

          40. A two-way data communication system as in Claim 30 wherein upon said server completing  
30 transmission of said response, said server maintains state information concerning said message wherein said server utilizes said state information concerning said  
35 message in response to another message from said cellular telephone.

41. A method for using a two-way data communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer comprising:

generating a message by a client module in response to data entered by said user of a two-way data communication device coupled to a two-way data communication network,

wherein said client module executes on a microcontroller of said two-way data communication device;

said message includes a resource locator; and

said two-way data communication device is selected from a group consisting of a cellular telephone, a two-way pager, and a telephone

transmitting said message over said two-way data communication network to a server computer wherein said server computer is identified by said resource locator;

executing an application on said server computer identified by said resource locator to generate a response to said message; and

transmitting said response to a location identified by said application.

42. A method for using a two-way data communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer as in Claim 41 wherein said response is transmitted to said client module.

43. A method for using a two-way data

communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer as in Claim 42 further comprising:

5           interpreting said response by said client module and generating a user interface using information in said response wherein said interface includes at least one user data input option associated with a resource locator.

10

44. A method for using a two-way data communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer as in  
15 Claim 43 wherein said resource locator associated with said user data input option addresses an object on said server computer.

45. A method for using a two-way data  
20 communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer as in Claim 43 wherein said resource locator associated with said user data input option addresses an object on  
25 another server computer.

46. A method for using a two-way data communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a  
30 telephone, to communicate with a server computer as in Claim 43 further comprising:

          interpreting a data input entry by a user of said two-way data communication device.

35           47. A method for using a two-way data communication device, selected from a group consisting

of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer as in Claim 46 further comprising:

5           appending said data input entry to said resource locator associated with said data input entry option.

10           48. A method for using a two-way data communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer as in Claim 42 wherein said response is a card deck and further wherein said card deck includes at least one card.

15           49. A method for using a two-way data communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer as in Claim 42 further comprising:

20           storing said card deck stored in a memory of two-way communication device.

25           50. A method for using a two-way data communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer as in Claim 49 further comprising:

30           processing said stored card deck using said client module.

35           51. A method for using a two-way data communication device, selected from a group consisting of a cellular telephone, a two-way pager, and a telephone, to communicate with a server computer as in Claim 50 further comprising:

generating a display on two-way data  
communication device for each card in said card  
deck.

5           52. A method for using a two-way data  
communication device, selected from a group consisting  
of a cellular telephone, a two-way pager, and a  
telephone, to communicate with a server computer as in  
Claim 51 wherein said at least one card is a display  
10 card.

53. A method for using a two-way data  
communication device, selected from a group consisting  
of a cellular telephone, a two-way pager, and a  
15 telephone, to communicate with a server computer as in  
Claim 51 wherein said at least one card is an entry  
card.

54. A method for using a two-way data  
20 communication device, selected from a group consisting  
of a cellular telephone, a two-way pager, and a  
telephone, to communicate with a server computer as in  
Claim 51 wherein said at least one card is a choice  
card.

25           55. A two-way data communication device having a  
microcontroller, wherein said two-way data  
communication device comprises:

          a memory;  
30           a display;  
          a display module coupled to said display  
wherein said display module drives said display;  
          a keypad including a plurality of keys;  
          a keypad module coupled to said keypad  
35           wherein upon a user pressing a key in  
said plurality of keys, said keypad module

stores information identifying the pressed  
key in said memory;

a network interface module wherein said  
network interface module receives data from and  
5 sends data to a two-way data communication  
network;

a client module coupled to said display  
module, said network interface module, said keypad  
module, and said memory;

10 wherein said client module executes on  
said microcontroller;

said client module, in response to a  
signal from said keypad module, processes  
said stored information identifying the  
15 pressed key and stores a character in a  
memory buffer; and

upon completion of data entry, said  
client module retrieves all characters in  
said memory buffer and generates a request  
20 including said characters to said network  
interface module which in turn transmits said  
request including said characters over said  
two-way data communication network.

25 56. A two-way data communication device as in  
Claim 55 further comprising:

a card deck stored in said memory.

30 57. A two-way data communication device as in  
Claim 56 wherein said card deck includes a display  
card.

35 58. A two-way data communication device as in  
Claim 57 wherein said client module processes said  
display card and sends information to said display  
module.

59. A two-way data communication device as in Claim 56 wherein said card deck includes a choice card.

5 60. A two-way data communication device as in Claim 59 wherein upon said client module processing said choice card, said client module retrieves said stored information identifying the pressed key, and generates a request for a choice corresponding to the pressed key to said server.

10

61. A two-way data communication device as in Claim 56 wherein said card deck includes a display card.



A METHOD AND ARCHITECTURE FOR AN INTERACTIVE TWO-WAY  
DATA COMMUNICATION NETWORK

5

Alain Rossmann

ABSTRACT OF THE DISCLOSURE

A two-way data communication device such as a data ready cellular telephone, a two-way pager, or a  
10 telephone communicates via a two-way data communication network with a server computer on a computer network that has an interface to the two-way data communication network, i.e, is coupled to the two-way data communication network. For example, the computer  
15 network can be a corporate wide area network, a corporate local area network, the Internet, or any combination of computer networks. The two-way data communication device utilizes a client module to transmit message including a resource selector chosen  
20 by the user to a server on a server computer on the computer network. The server processes the message and transmits a response over the two-way data communication network to the client module. The client module interprets the response and presents the  
25 response to the user via a structured user interface. Alternatively, the user transmits a request that directs the server to transmit the response to the request to another location or to another user.

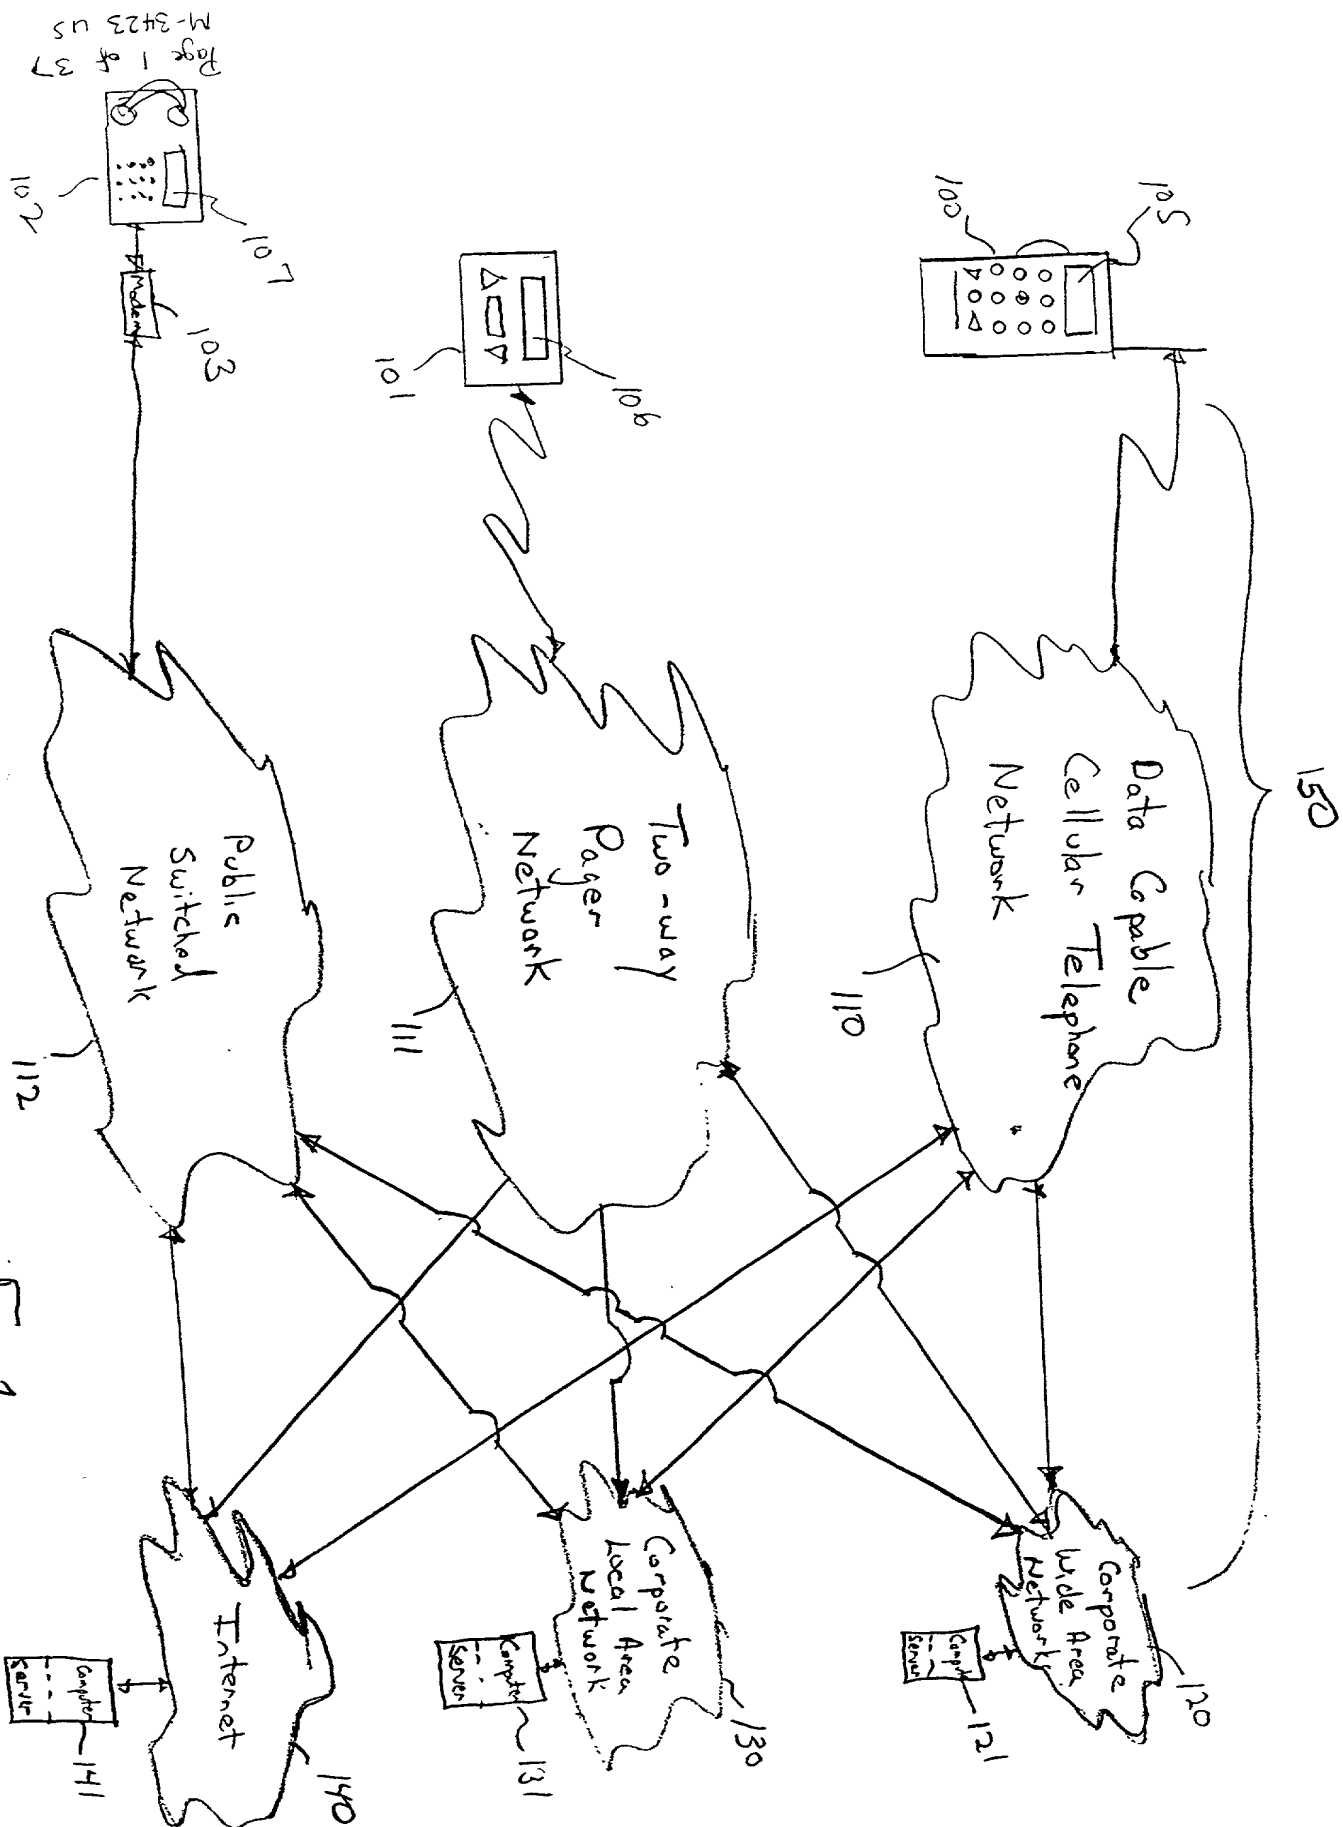


Fig. 1

Fig. 2A

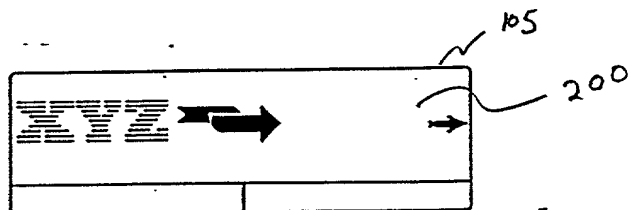


Fig. 2B

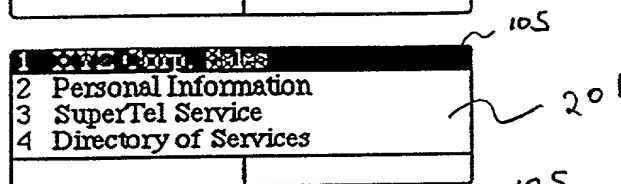


Fig. 2C

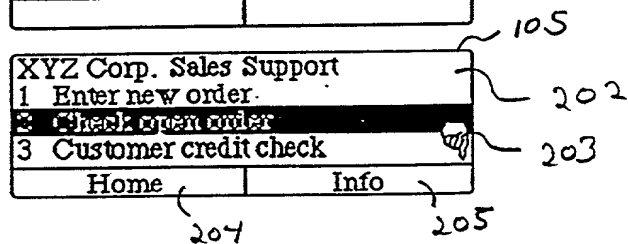


Fig. 2D

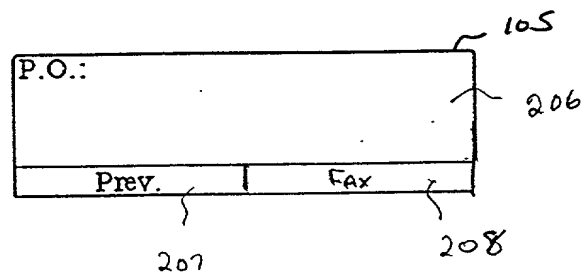


Fig. 2E

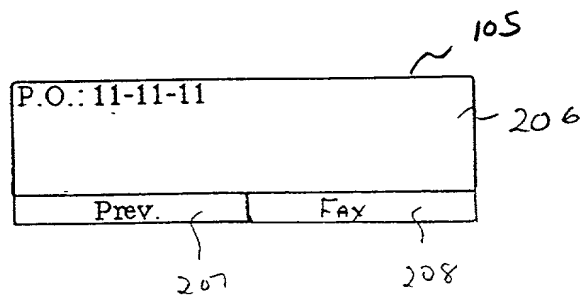


Fig. 2F

105

P.O.: 11-11-11	
Cust: ABC Designs	
Date: March 3, 1994	
Ship: March 7, 1994	
Prev.	Fax

209

203

207

208

Fig. 2G

105

Fax details to what number.	
Prev.	

Fig. 2H

105

Fax details to what number.	
(415) 341-4473	
Prev.	

Fig. 3A

Fig. 3B

Fig. 3C

Fig. 3D

Fig. 3E

Fig. 3F

Fig 4A

105

AirNet

"Information In The Air"

-- Service Directory --

Home 401

400

Fig. 4B

105

1 OZ 2 ABC 3 DEF

4 GHI 5 JKL 6 MNO

7 PRS 8 TUV 9 WXY

AirNet Services

Home 401

401

Fig. 4C

105

7 PRS

1 Palo Alto Community Calendar

2 Real Estate Listings

3 Stock Quotes

Home 401

402

Fig 4D

105

STOCK MARKET

DIRECT

AirNet Info

403

404

405

Fig. 4E

105

Enter ticker symbol of the stock:

SUNW

AirNet Info

Fig 4F

Fig 4G

Fig. 4H

Fig 4I

409

Volume : 1073600

Symbol : SUNW

Last Traded at: 35.500

Exchange : NASDAQ

Description : SUN MICRO

Day Low : 34.375

Day High : 35.625

Date/Time : Apr 05 4:0

Bid : 35.375

Ask : 35.625

52 Week Low : 18.250

52 Week High: 37.625

% Change : 1.43

\$ Change : 0.500

# of Trades : 797

Prev.

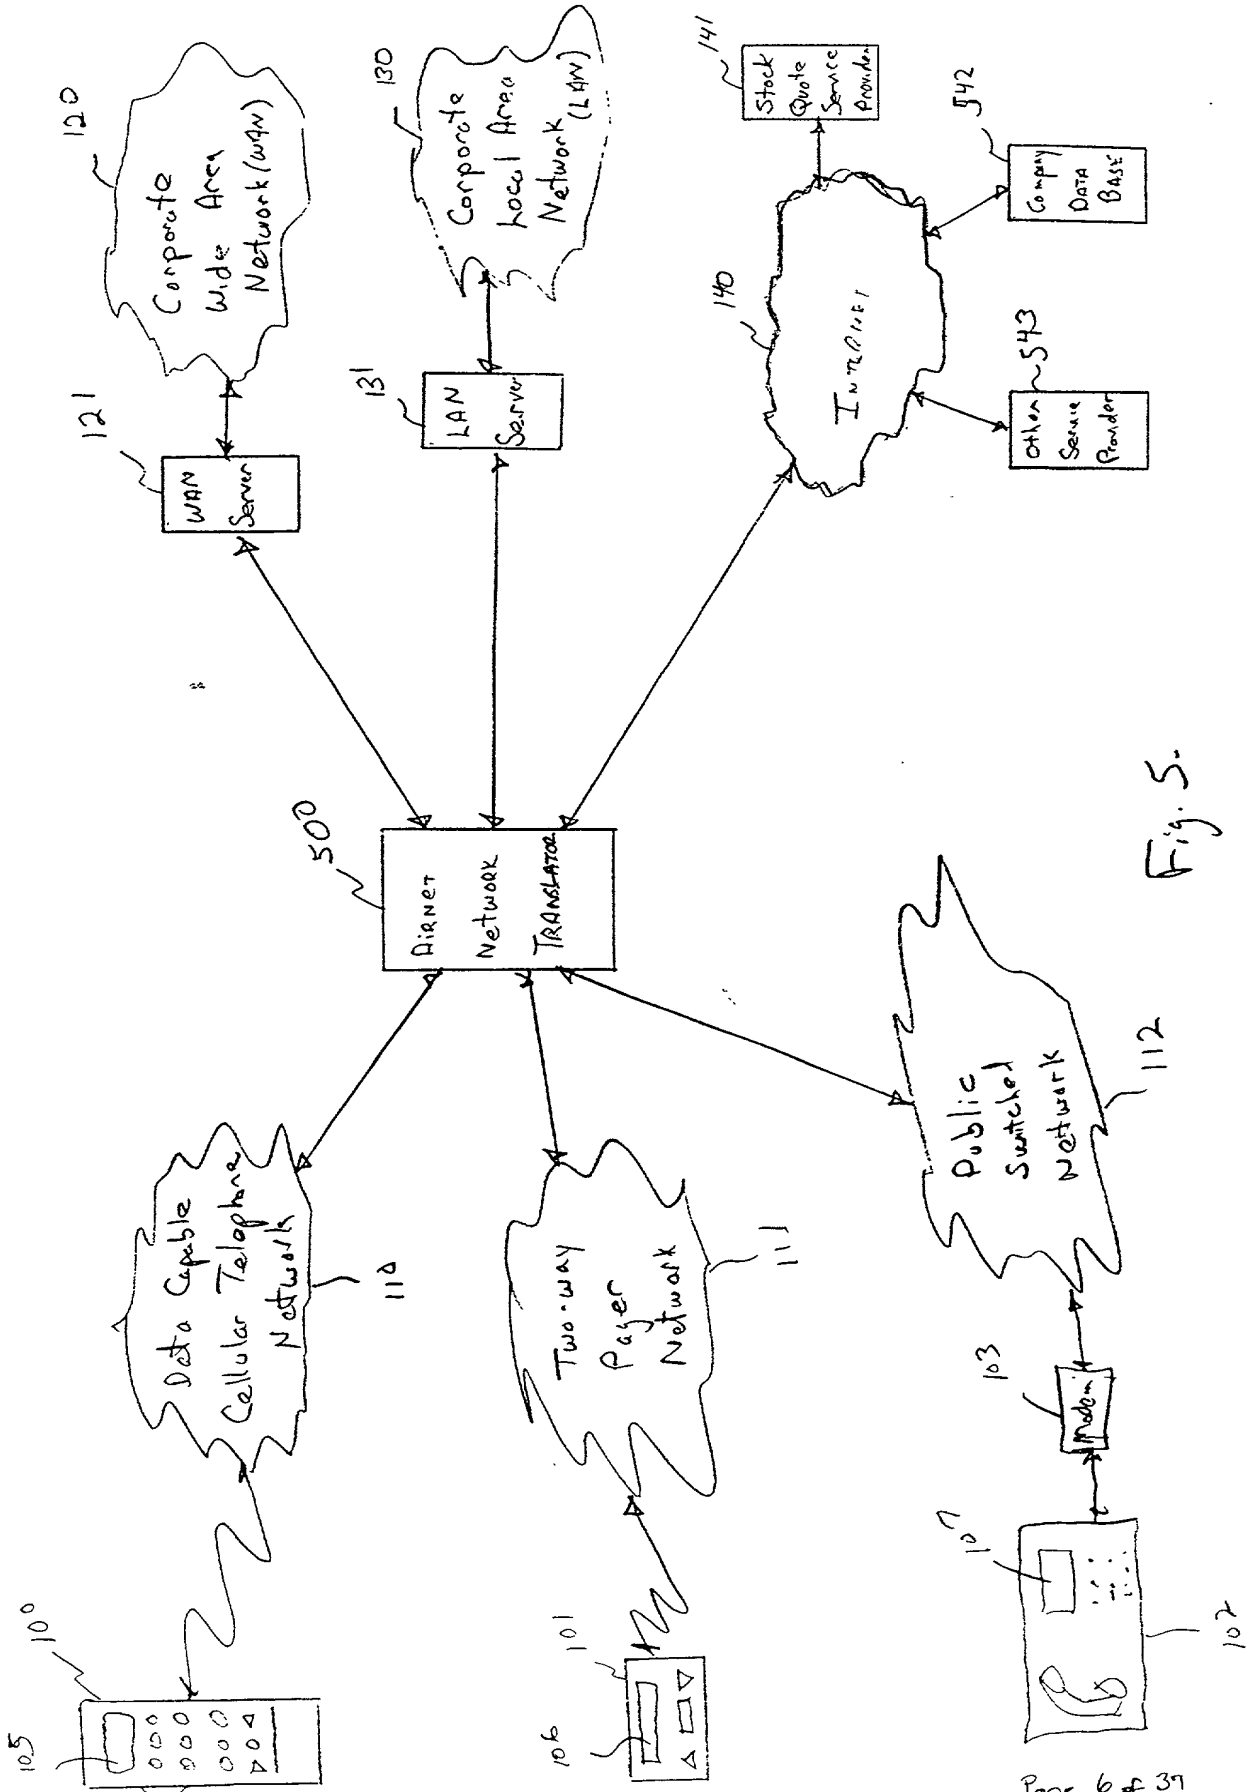



Fig. 5.





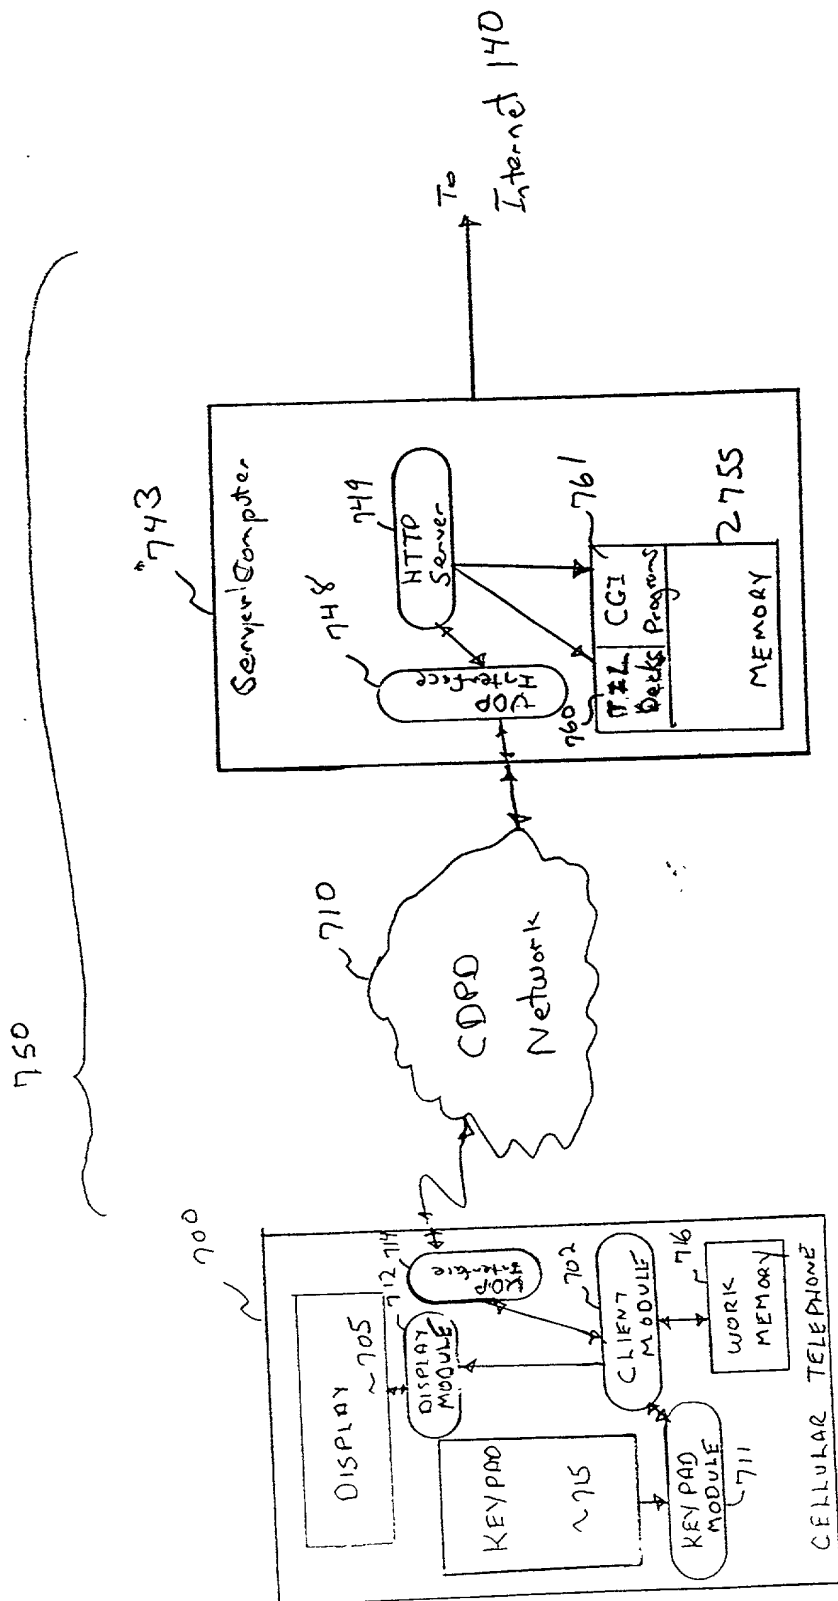


Fig. 7

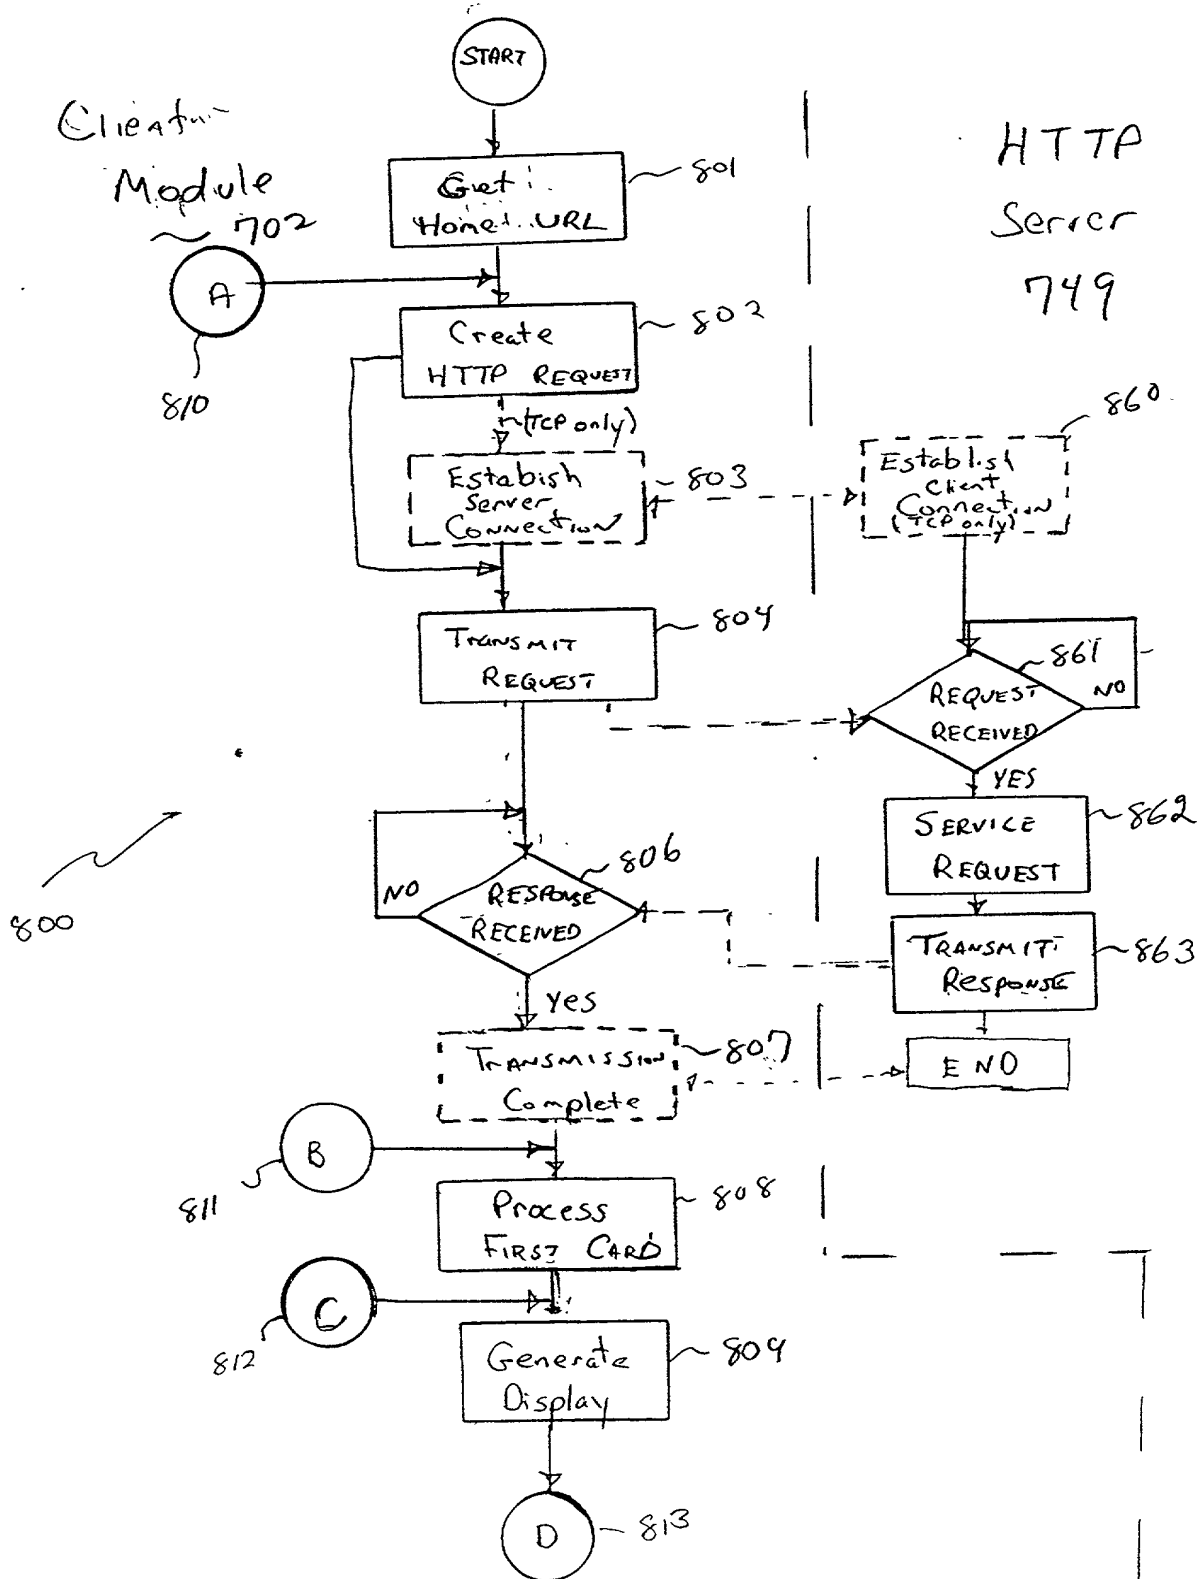


Fig. 8A

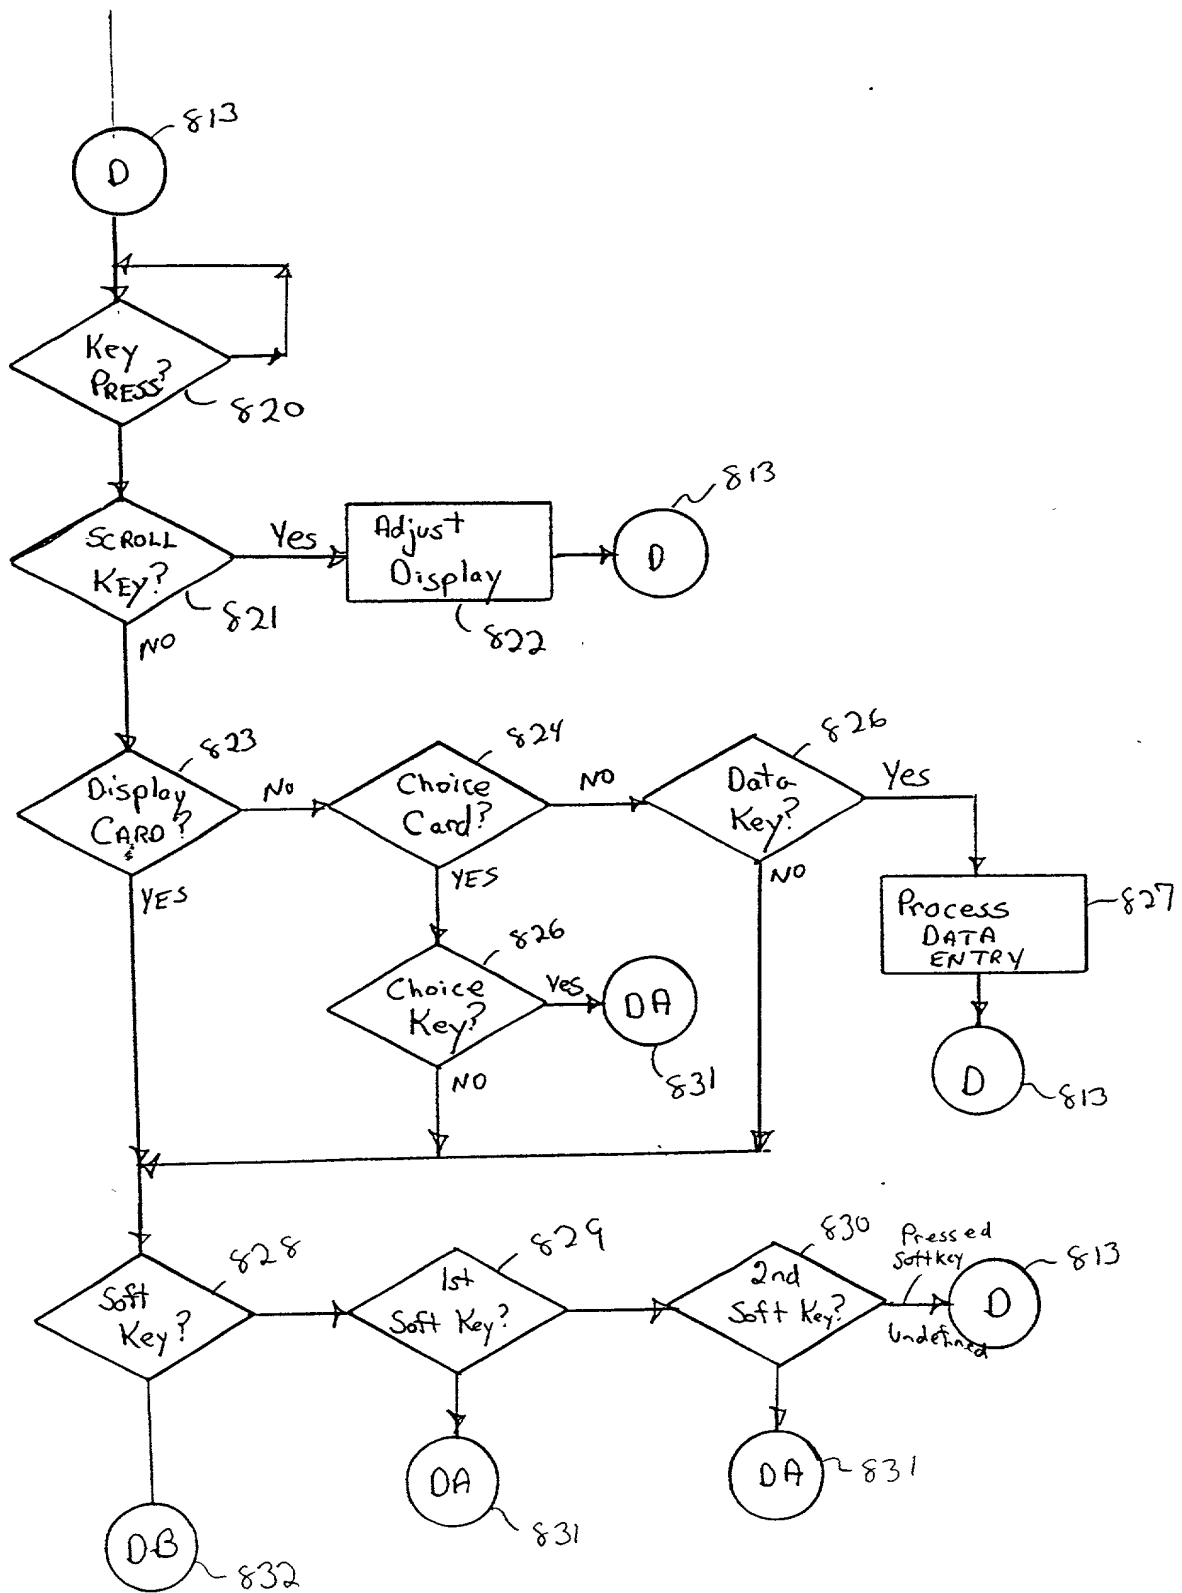


Fig 8B

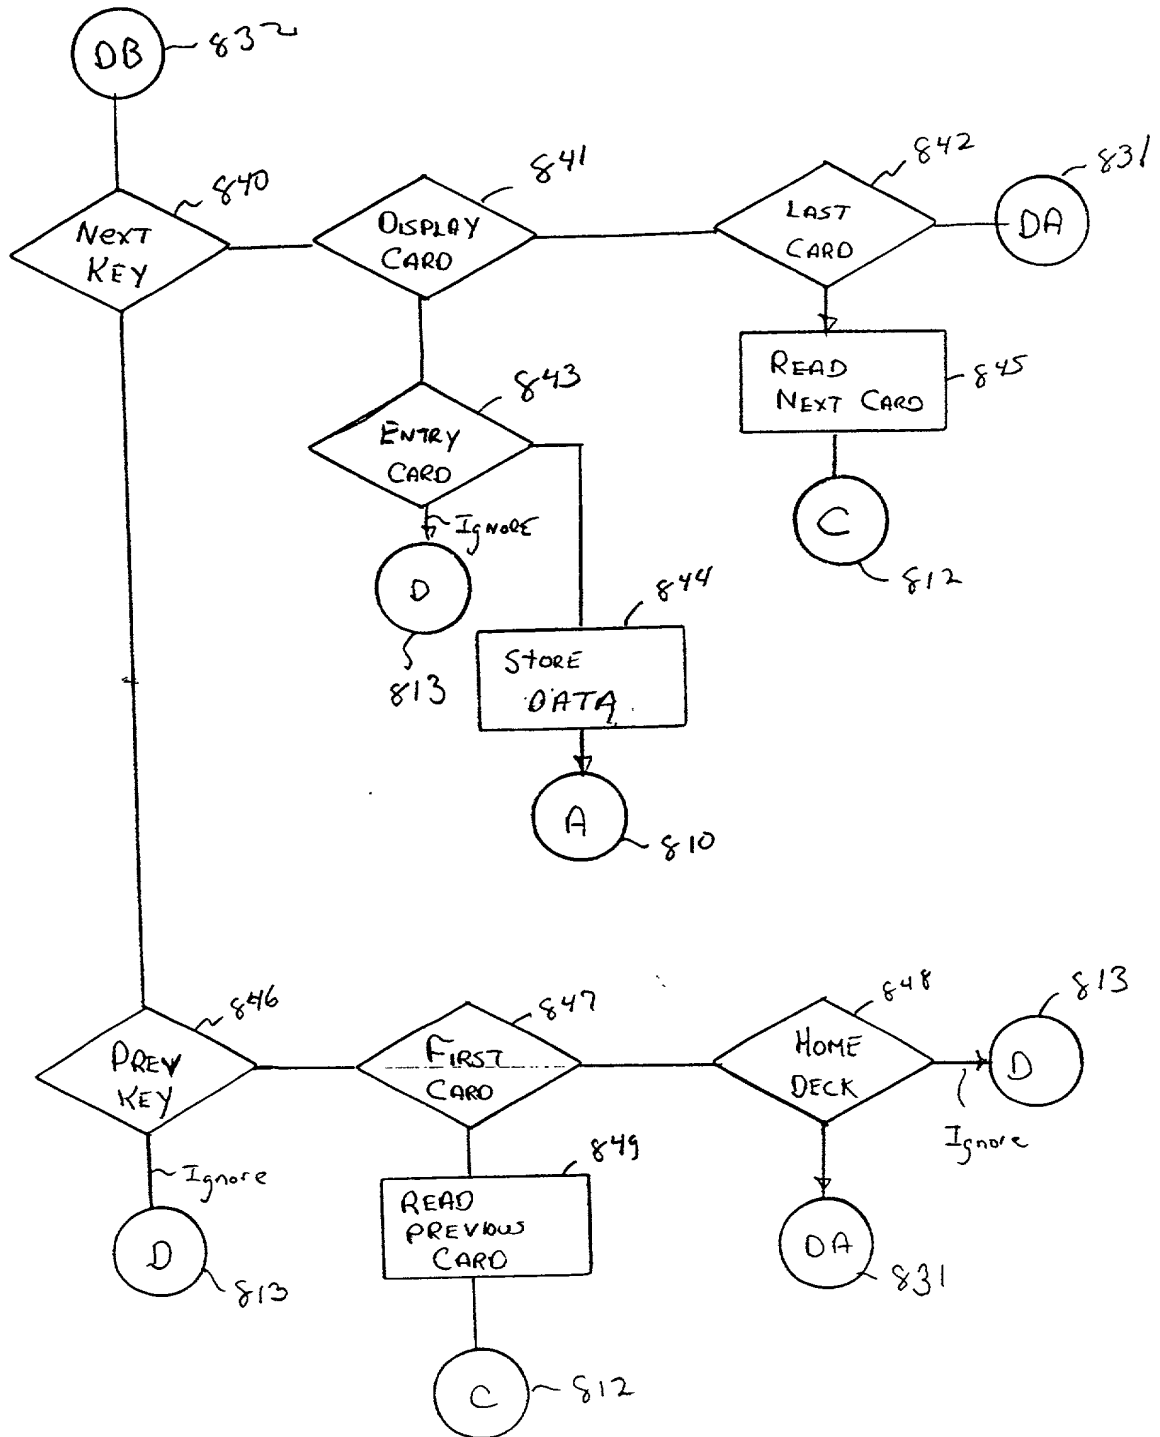


Fig 8C

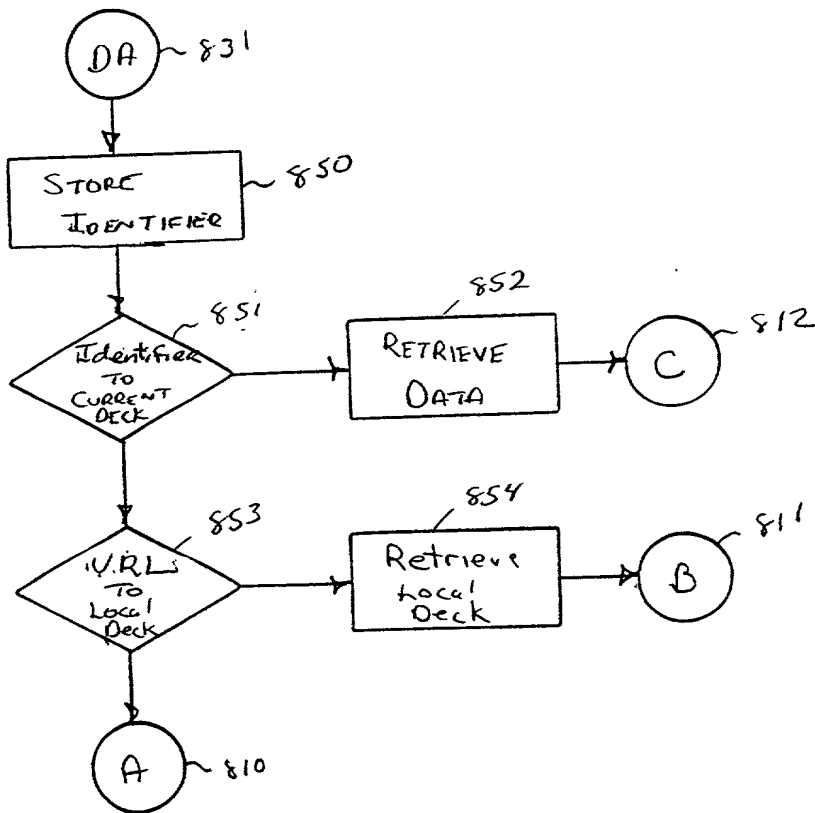


Fig 8D

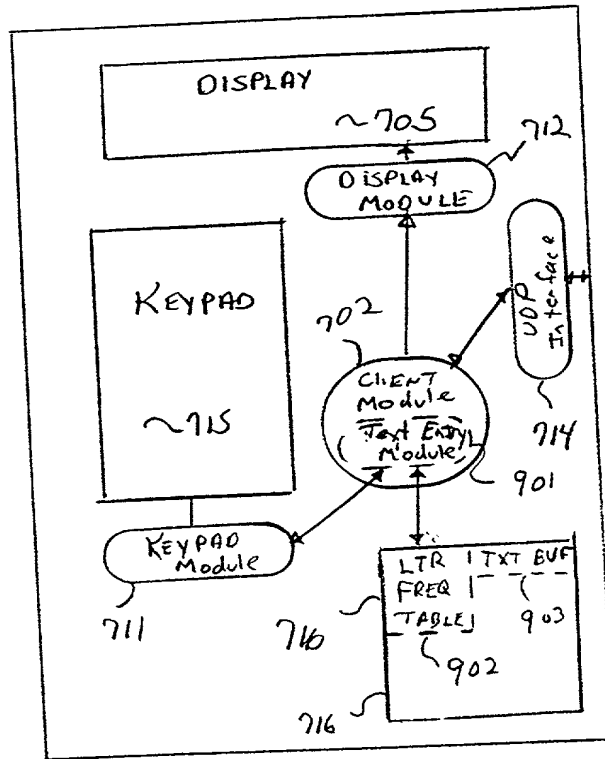


Fig. 9

"-	-"	1	2	3	4	5	6	7	8	9
"a	a"	q	a	d	g	j	m	r	t	w
"a	b"	q	a	e	i	l	o	r	u	w
"a	c"	q	c	e	h	k	m	r	t	w
"a	d"	q	a	d	i	j	m	s	v	y
"a	e"	q	a	d	g	j	m	p	t	w
"a	f"	q	a	f	g	j	m	r	t	w
"a	g"	q	a	e	i	j	o	r	t	w
"a	h"	q	a	e	g	j	m	p	u	w
"a	i"	q	c	d	g	l	n	r	t	w
"a	j"	q	a	d	g	j	o	p	t	w
"a	k"	q	a	e	i	j	m	s	t	w
"a	l"	q	a	e	i	l	o	s	t	w
"a	m"	q	a	e	i	l	o	p	u	w
"a	n"	q	c	d	g	k	n	s	t	y
"a	o"	q	a	d	g	j	m	p	t	w
"a	p"	q	a	e	h	l	o	p	t	w
"a	q"	q	a	d	g	j	m	s	t	w
"a	r"	q	c	e	g	k	o	r	t	y
"a	s"	q	c	e	i	k	o	s	t	y
"a	t"	q	a	e	i	l	o	s	t	w
"a	u"	q	c	d	g	l	m	s	t	w
"a	v"	q	a	e	i	j	o	p	t	w
"a	w"	q	a	d	g	k	m	p	t	w
"a	x"	q	a	e	i	l	m	s	t	w
"a	y"	q	b	e	i	j	m	s	t	w
"a	z"	q	a	d	i	j	m	p	t	w
"a	"	q	a	d	g	j	m	p	t	w
"b	a"	q	c	d	g	k	n	s	t	y
"b	b"	q	a	d	i	j	m	s	t	y
"b	c"	q	a	d	g	j	o	r	t	w
"b	d"	q	a	d	g	j	m	s	t	w
"b	e"	q	c	e	g	l	n	s	t	x
"b	f"	q	a	d	g	j	m	p	t	w
"b	g"	q	a	d	g	j	m	p	t	w
"b	h"	q	a	d	g	j	m	p	t	w
"b	i"	q	c	d	g	l	n	s	t	w
"b	j"	q	a	e	g	j	m	p	t	w

FIG. 10 A Page 14 of 37  
M. 3423 US

"-	-"	1	2	3	4	5	6	7	8	9
"b	k"	q	a	d	g	j	m	p	t	w
"b	l"	q	a	e	i	j	o	p	t	y
"b	m"	q	a	d	g	j	m	r	t	w
"b	n"	q	a	d	g	j	m	p	t	w
"b	o"	q	a	d	i	j	o	s	u	x
"b	p"	q	a	d	g	j	m	s	t	w
"b	q"	q	a	d	g	j	m	p	t	w
"b	r"	q	a	e	i	j	o	p	u	w
"b	s"	q	c	d	i	j	o	s	t	w
"b	t"	q	a	d	g	j	m	p	t	w
"b	u"	q	a	d	i	l	m	s	t	y
"b	v"	q	a	d	i	j	m	p	t	w
"b	w"	q	a	e	g	j	m	p	t	w
"b	x"	q	a	d	g	j	m	p	t	w
"b	y"	q	a	d	g	j	m	p	t	w
"b	z"	q	a	d	g	j	m	p	t	w
"b	"	q	a	d	g	j	m	p	t	w
"c	a"	q	b	d	g	l	n	r	t	w
"c	b"	q	a	e	g	j	m	p	t	w
"c	c"	q	a	e	i	j	o	s	t	w
"c	d"	q	a	d	g	j	m	p	t	w
"c	e"	q	a	d	i	l	n	s	t	w
"c	f"	q	a	d	i	j	m	p	t	w
"c	g"	q	a	d	i	j	m	p	t	w
"c	h"	q	a	e	i	j	o	r	t	w
"c	i"	q	a	f	i	l	n	p	t	w
"c	j"	q	a	d	g	j	m	p	t	w
"c	k"	q	b	e	i	l	m	s	t	y
"c	l"	q	a	e	i	j	o	r	u	w
"c	m"	q	c	d	g	j	m	p	t	w
"c	n"	q	a	d	g	j	m	p	t	w
"c	o"	q	a	d	g	l	m	r	u	w
"c	p"	q	a	d	g	j	m	p	t	w
"c	q"	q	a	d	g	j	m	p	t	w
"c	r"	q	a	e	i	j	o	p	u	y
"c	s"	q	a	d	i	l	o	s	t	w
"c	t"	q	a	e	i	l	o	r	u	w

FIG. 10 B Page 15 of 37  
14-3423 US



"-	-"	1	2	3	4	5	6	7	8	9
"c	u"	q	b	e	i	l	m	s	t	w
"c	v"	q	a	d	g	j	m	p	t	w
"c	w"	q	a	d	g	j	m	p	t	w
"c	x"	q	a	d	g	j	m	p	t	w
"c	y"	q	c	d	g	j	m	p	t	w
"c	z"	q	a	d	g	j	n	p	t	w
"c	"	q	a	d	g	j	m	p	t	w
"d	a"	q	b	d	g	j	n	r	t	y
"d	b"	q	a	d	g	j	m	p	t	w
"d	c"	q	a	d	g	j	m	p	t	w
"d	d"	q	a	e	i	l	m	r	t	w
"d	e"	q	a	e	i	l	m	r	v	x
"d	f"	q	a	d	i	j	m	p	t	w
"d	g"	q	a	e	g	j	m	p	t	w
"d	h"	q	a	e	g	j	m	p	t	w
"d	i"	z	a	f	g	l	n	s	t	w
"d	j"	q	a	d	g	j	m	p	t	w
"d	k"	q	a	d	g	j	m	p	t	w
"d	l"	q	a	e	i	j	m	p	t	y
"d	m"	q	a	e	i	j	m	s	t	w
"d	n"	q	a	e	i	j	m	p	t	w
"d	o"	q	c	e	i	j	n	p	t	w
"d	p"	q	a	e	g	j	m	p	t	w
"d	q"	q	a	d	g	j	m	p	u	w
"d	r"	q	a	e	i	j	o	p	t	w
"d	s"	q	a	e	i	j	m	p	t	w
"d	t"	q	a	e	g	j	m	r	t	w
"d	u"	q	c	e	g	l	m	r	t	w
"d	v"	q	a	e	i	j	m	p	t	w
"d	w"	q	a	d	i	j	o	p	t	w
"d	x"	q	a	d	g	j	m	p	t	w
"d	y"	q	a	d	g	j	m	p	t	w
"d	z"	q	a	d	g	j	m	p	t	w
"d	"	q	a	d	g	j	m	p	t	w
"e	a"	q	c	d	g	l	n	s	t	w
"e	b"	q	c	f	g	j	m	r	t	y
"e	c"	q	a	e	h	k	o	s	t	w

FIG. 10 C Page 16 of 37  
M-3423 us

"-	-"	1	2	3	4	5	6	7	8	9
"e	d"	q	b	e	i	l	n	s	u	w
"e	e"	z	a	d	i	k	n	r	t	w
"e	f"	q	a	e	i	l	o	r	t	w
"e	g"	q	a	d	i	j	o	r	u	y
"e	h"	q	a	e	i	j	m	p	t	w
"e	i"	q	a	d	g	j	n	r	v	w
"e	j"	q	a	e	g	j	m	p	t	w
"e	k"	q	a	e	i	j	m	s	t	w
"e	l"	q	a	e	i	l	o	p	v	y
"e	m"	q	a	e	i	j	o	s	u	w
"e	n"	q	c	d	g	l	o	s	t	w
"e	o"	q	a	f	g	j	n	p	u	w
"e	p"	q	a	e	h	l	o	r	t	w
"e	q"	q	a	d	g	j	m	p	u	w
"e	r"	q	a	e	i	l	n	s	v	y
"e	s"	q	c	e	i	k	n	s	t	w
"e	t"	z	c	e	i	j	m	s	t	w
"e	u"	q	a	d	g	j	m	r	t	w
"e	v"	q	a	e	i	j	o	p	t	w
"e	w"	q	a	e	h	j	o	s	t	w
"e	x"	q	a	e	i	j	m	p	t	w
"e	y"	q	a	d	g	j	o	s	t	w
"e	z"	q	a	e	g	j	m	p	t	w
"e	"	q	a	d	g	j	m	p	t	w
"f	a"	q	c	d	i	k	m	s	v	x
"f	b"	q	a	d	g	j	m	p	t	w
"f	c"	q	c	d	g	j	m	p	t	w
"f	d"	q	a	d	g	j	m	p	t	w
"f	e"	q	a	e	g	l	m	r	t	w
"f	f"	q	a	e	i	j	o	s	t	w
"f	g"	q	a	d	g	j	m	p	t	w
"f	h"	q	a	d	g	j	m	p	t	w
"f	i"	q	c	e	g	l	n	r	t	x
"f	j"	q	a	d	g	j	m	p	t	w
"f	k"	q	a	d	g	j	m	p	t	w
"f	l"	q	a	e	i	j	o	p	t	y
"f	m"	q	a	d	g	j	m	p	t	w

"_	_"	1	2	3	4	5	6	7	8	9
"f	n"	q	a	d	g	j	m	p	t	w
"f	o"	q	c	d	g	l	n	r	u	w
"f	p"	q	a	d	g	j	m	p	t	w
"f	q"	q	a	d	g	j	m	p	t	w
"f	r"	q	a	e	i	j	o	p	t	y
"f	s"	q	a	e	g	j	m	p	t	w
"f	t"	q	a	e	g	k	m	p	t	w
"f	u"	q	a	d	g	l	n	r	t	w
"f	v"	q	a	d	g	j	m	p	t	w
"f	w"	q	a	d	g	j	m	p	t	w
"f	x"	q	a	d	g	j	m	p	t	w
"f	y"	q	a	d	i	j	m	p	t	w
"f	z"	q	a	d	g	j	m	p	t	w
"f	"	q	a	d	g	j	m	p	t	w
"g	a"	z	a	d	i	l	n	r	t	w
"g	b"	q	a	d	g	j	m	p	t	w
"g	c"	q	a	d	g	j	m	s	t	w
"g	d"	q	a	d	g	j	o	p	t	w
"g	e"	q	a	d	g	l	n	s	t	w
"g	f"	q	a	d	g	j	m	p	u	w
"g	g"	q	a	e	g	l	m	p	t	w
"g	h"	q	a	e	g	j	o	p	t	w
"g	i"	q	c	f	g	j	n	s	v	w
"g	j"	q	a	d	g	j	m	p	t	w
"g	k"	q	a	d	g	j	m	p	t	w
"g	l"	q	a	e	i	j	o	p	t	y
"g	m"	q	a	e	g	l	m	s	t	w
"g	n"	q	a	e	i	j	o	p	t	w
"g	o"	q	a	e	i	j	o	p	t	w
"g	p"	q	a	d	g	j	m	p	t	w
"g	q"	q	a	d	g	j	m	p	t	w
"g	r"	q	a	e	g	j	o	p	t	w
"g	s"	q	a	e	g	j	m	p	t	w
"g	t"	q	a	e	h	j	o	p	t	w
"g	u"	q	a	e	i	l	m	r	t	y
"g	v"	q	a	d	g	j	m	p	t	w
"g	w"	q	a	d	g	j	m	p	t	w

FIG. 10 E Page 18 of 37  
M-3423 US

"-	-"	1	2	3	4	5	6	7	8	9
"g	x"	q	a	d	g	j	m	p	t	w
"g	y"	q	a	d	g	j	m	p	t	w
"g	z"	q	a	d	g	j	m	p	t	w
"g	"	q	a	d	g	j	m	p	t	w
"h	a"	q	b	d	i	l	n	s	t	w
"h	b"	q	a	d	g	j	m	p	t	w
"h	c"	q	a	d	g	j	m	p	t	w
"h	d"	q	a	d	g	j	m	r	t	w
"h	e"	q	c	d	i	l	n	r	t	y
"h	f"	q	a	d	g	j	m	p	t	w
"h	g"	q	a	d	g	j	m	p	t	w
"h	h"	q	a	d	g	j	m	p	t	w
"h	i"	q	c	e	g	l	n	s	t	w
"h	j"	q	a	d	g	j	m	p	t	w
"h	k"	q	a	d	g	j	m	p	t	w
"h	l"	q	a	d	g	j	m	p	t	y
"h	m"	q	a	e	g	j	m	p	t	w
"h	n"	q	a	d	i	j	o	p	t	w
"h	o"	q	b	d	i	l	n	r	u	w
"h	p"	q	a	d	g	j	m	p	u	w
"h	q"	q	a	d	g	j	m	p	t	w
"h	r"	q	a	e	i	j	o	p	t	w
"h	s"	q	a	d	g	j	m	p	t	w
"h	t"	q	a	d	g	l	m	s	t	w
"h	u"	q	a	d	g	l	m	r	t	w
"h	v"	q	a	d	g	j	m	p	t	w
"h	w"	q	a	d	g	j	m	p	t	w
"h	x"	q	a	d	g	j	m	p	t	w
"h	y"	q	a	d	g	j	m	p	t	w
"h	z"	q	a	d	g	j	m	p	t	w
"h	"	q	a	d	g	j	m	p	t	w
"i	a"	q	b	d	g	l	n	r	t	w
"i	b"	q	a	e	i	l	m	r	u	w
"i	c"	q	a	e	h	k	o	r	t	y
"i	d"	q	a	e	i	l	n	p	u	w
"i	e"	q	c	d	g	l	n	r	v	w
"i	f"	q	a	f	i	j	o	p	t	y

"-	-"	1	2	3	4	5	6	7	8	9
"i	g"	q	a	e	h	j	n	r	u	w
"i	h"	q	a	d	g	j	m	p	t	w
"i	i"	q	a	d	g	j	m	p	t	w
"i	j"	q	a	d	g	j	o	p	t	w
"i	k"	q	a	e	g	k	o	p	t	w
"i	l"	q	a	e	i	l	o	s	t	y
"i	m"	q	a	e	i	j	m	p	u	w
"i	n"	q	c	e	g	k	n	s	t	w
"i	o"	q	a	d	g	l	n	r	u	w
"i	p"	q	a	d	i	l	m	s	t	w
"i	q"	q	a	d	g	j	m	p	u	w
"i	r"	q	c	e	i	l	n	s	t	w
"i	s"	q	c	e	h	k	n	s	t	w
"i	t"	q	a	e	h	l	o	s	t	y
"i	u"	q	a	e	g	j	m	p	t	w
"i	v"	q	a	e	i	j	m	p	t	w
"i	w"	q	a	d	g	j	m	p	t	w
"i	x"	q	a	e	g	j	m	p	t	w
"i	y"	q	a	e	g	j	m	p	t	w
"i	z"	q	a	e	i	j	o	p	t	w
"i	"	q	a	d	g	j	m	p	t	w
"j	a"	q	c	d	g	j	n	p	t	w
"j	b"	q	a	d	g	j	m	p	t	w
"j	c"	q	a	d	g	j	m	p	t	w
"j	d"	q	a	d	g	j	m	p	t	w
"j	e"	q	c	d	g	j	m	r	t	w
"j	f"	q	a	d	g	j	m	p	t	w
"j	g"	q	a	d	g	j	m	p	t	w
"j	h"	q	a	d	g	j	m	p	t	w
"j	i"	q	a	d	g	j	m	p	t	w
"j	j"	q	a	d	g	j	m	p	t	w
"j	k"	q	a	d	g	j	m	p	t	w
"j	l"	q	a	d	g	j	m	p	t	w
"j	m"	q	a	d	g	j	m	p	t	w
"j	n"	q	a	d	g	j	m	p	t	w
"j	o"	q	b	e	i	j	m	r	t	w
"j	p"	q	a	d	g	j	m	p	t	w

FIG. 10 G Page 20 of 24  
M. 3423

FIG. 10 H Page 51 of 37  
M-3423 us

-	-	1	2	3	4	5	6	7	8	9
"k	"	q	a	d	g	j	m	p	t	w
"l	a"	q	b	d	i	j	n	r	t	y
"l	b"	q	a	d	g	j	o	p	t	w
"l	c"	q	a	d	g	j	o	p	t	w
"l	d"	q	a	e	i	j	n	s	t	w
"l	e"	q	a	d	g	l	m	s	t	x
"l	f"	q	a	d	g	j	m	p	t	w
"l	g"	q	a	d	g	j	m	p	t	w
"l	h"	q	a	d	g	j	m	p	t	w
"l	i"	z	c	e	g	k	n	s	t	w
"l	j"	q	a	e	g	j	m	p	t	w
"l	k"	q	a	e	i	j	m	s	t	w
"l	l"	q	c	e	i	j	o	s	u	y
"l	m"	q	a	d	g	j	o	s	t	w
"l	n"	q	a	e	g	j	m	p	t	w
"l	o"	q	c	d	g	j	o	s	t	w
"l	p"	q	a	d	h	j	m	s	t	w
"l	q"	q	a	d	g	j	m	p	t	w
"l	r"	q	a	e	g	j	m	p	t	w
"l	s"	q	a	e	i	j	o	p	t	w
"l	t"	q	a	e	i	j	o	s	t	w
"l	u"	q	c	d	g	l	m	s	t	w
"l	v"	q	a	e	i	j	m	p	t	w
"l	w"	q	a	e	g	j	m	p	t	w
"l	x"	q	a	d	g	j	m	p	t	w
"l	y"	z	a	d	i	j	n	s	t	w
"l	z"	q	a	d	g	j	m	p	t	w
"l	"	q	a	d	g	j	m	p	t	w
"m	a"	q	c	d	i	k	n	r	t	y
"m	b"	q	a	e	i	l	m	p	t	y
"m	c"	q	c	d	i	j	o	p	t	w
"m	d"	q	a	d	g	j	m	p	t	w
"m	e"	q	a	e	g	l	n	s	t	w
"m	f"	q	a	d	g	j	o	p	t	w
"m	g"	q	a	d	g	j	m	p	t	w
"m	h"	z	a	d	g	j	m	p	t	w
"m	i"	z	c	d	g	l	n	s	t	x

© 1995, Libris, Inc.

"-	-"	1	2	3	4	5	6	7	8	9
"m	j"	q	a	d	g	j	m	p	t	w
"m	k"	q	a	d	g	j	m	p	t	w
"m	l"	q	a	e	g	j	m	p	t	y
"m	m"	q	a	e	i	j	o	p	u	w
"m	n"	q	a	d	i	j	m	p	t	w
"m	o"	q	b	d	i	j	n	r	v	w
"m	p"	q	a	e	i	l	o	r	t	w
"m	q"	q	a	d	g	j	m	p	t	w
"m	r"	q	a	d	g	j	m	p	t	w
"m	s"	q	a	e	g	j	m	p	t	w
"m	t"	q	a	d	g	j	m	p	t	w
"m	u"	q	c	d	g	l	n	s	t	w
"m	v"	q	a	d	g	j	m	p	t	w
"m	w"	q	a	d	h	j	m	p	t	w
"m	x"	q	a	d	g	j	m	p	t	w
"m	y"	q	c	d	g	j	m	s	t	w
"m	z"	q	a	d	g	j	m	p	t	w
"m	"	q	a	d	g	j	m	p	t	w
"n	a"	q	b	d	g	l	m	r	t	w
"n	b"	q	a	d	g	j	m	p	t	w
"n	c"	q	a	e	i	l	o	r	t	y
"n	d"	q	a	e	i	l	o	s	t	y
"n	e"	q	c	e	i	l	n	s	t	w
"n	f"	q	a	e	i	j	o	s	u	w
"n	g"	q	a	e	i	l	m	s	u	w
"n	h"	q	a	d	g	j	m	p	t	w
"n	i"	z	c	e	g	l	n	s	t	x
"n	j"	q	a	d	g	j	m	p	u	w
"n	k"	q	a	e	i	j	n	s	t	w
"n	l"	q	a	e	i	j	o	p	t	y
"n	m"	q	a	e	g	j	m	p	t	w
"n	n"	q	a	e	i	j	o	p	u	y
"n	o"	q	b	d	g	l	n	r	t	w
"n	p"	q	a	d	g	j	o	p	u	w
"n	q"	q	a	d	g	j	m	p	u	w
"n	r"	q	a	d	g	j	m	p	t	w
"n	s"	q	a	e	i	l	m	p	t	w

FIG. 10 J Page 23 of 37  
17 3423 US



"-	-"	1	2	3	4	5	6	7	8	9
"n	t"	q	a	e	i	l	o	s	u	y
"n	u"	q	a	f	g	j	m	s	t	x
"n	v"	q	a	e	i	j	o	p	t	w
"n	w"	q	a	e	g	j	m	p	t	w
"n	x"	q	a	d	g	j	m	p	t	w
"n	y"	q	b	d	h	j	m	p	t	w
"n	z"	q	a	d	g	j	m	p	t	w
"n	"	q	a	d	g	j	m	p	t	w
"o	a"	q	b	d	g	l	m	s	t	w
"o	b"	q	a	e	i	l	o	s	t	w
"o	c"	q	a	e	h	k	o	s	u	w
"o	d"	q	a	e	i	l	o	s	u	y
"o	e"	q	a	d	g	j	m	s	t	w
"o	f"	q	a	f	g	j	m	p	t	w
"o	g"	q	a	e	i	j	o	r	t	y
"o	h"	q	a	d	g	j	n	p	t	w
"o	i"	q	c	d	g	l	n	p	t	w
"o	j"	q	a	e	g	j	m	p	t	w
"o	k"	q	a	e	i	j	m	s	t	w
"o	l"	q	b	d	i	l	o	s	u	w
"o	m"	q	a	e	i	l	m	p	t	w
"o	n"	q	a	e	g	l	n	s	t	y
"o	o"	q	a	d	g	k	n	s	t	w
"o	p"	q	a	e	h	l	m	p	t	y
"o	q"	q	a	d	g	j	m	p	t	w
"o	r"	q	a	e	g	k	m	r	t	w
"o	s"	q	c	e	i	j	o	s	t	y
"o	t"	q	a	e	h	j	o	s	t	y
"o	u"	q	c	d	g	l	n	r	t	y
"o	v"	q	a	e	i	j	m	p	t	w
"o	w"	q	a	e	i	j	n	s	t	w
"o	x"	q	a	d	i	j	m	p	t	w
"o	y"	q	a	e	g	j	m	s	t	w
"o	z"	q	a	d	g	j	m	p	t	w
"o	"	q	a	d	g	j	m	p	t	w
"p	a"	q	c	d	g	l	n	r	t	y
"p	b"	q	a	e	g	j	m	p	t	w

FIG. 10 K Page 24 of 37  
M-3423 US

"-	-"	1	2	3	4	5	6	7	8	9
"p	c"	q	a	d	g	j	m	s	t	w
"p	d"	q	a	d	g	j	m	p	t	w
"p	e"	q	c	d	g	j	n	r	t	w
"p	f"	q	a	d	g	j	m	r	t	w
"p	g"	q	a	d	g	j	m	p	t	w
"p	h"	q	a	e	i	j	o	s	t	y
"p	i"	q	c	d	g	j	n	r	t	x
"p	j"	q	a	d	g	j	m	p	t	w
"p	k"	q	a	d	g	j	m	p	t	w
"p	l"	q	a	e	i	j	o	p	u	y
"p	m"	q	a	e	g	j	m	p	t	w
"p	n"	q	a	d	g	j	m	p	t	w
"p	o"	q	c	d	i	j	n	r	t	w
"p	p"	q	a	e	i	j	o	p	t	y
"p	q"	q	a	e	g	j	m	p	t	w
"p	r"	q	a	e	i	j	o	p	t	y
"p	s"	q	a	e	g	j	m	p	t	w
"p	t"	q	c	e	i	j	o	s	t	w
"p	u"	q	b	d	g	j	m	r	t	w
"p	v"	q	a	d	g	j	m	p	t	w
"p	w"	q	a	d	g	j	m	p	t	w
"p	x"	q	a	d	g	j	m	p	t	w
"p	y"	q	a	d	g	j	m	r	t	w
"p	z"	q	a	d	g	j	m	p	t	w
"p	"	q	a	d	g	j	m	p	t	w
"q	a"	q	a	d	g	j	m	p	t	w
"q	b"	q	a	d	g	j	m	p	t	w
"q	c"	q	a	d	g	j	m	p	t	w
"q	d"	q	a	d	g	j	m	p	t	w
"q	e"	q	a	d	g	j	m	p	t	w
"q	f"	q	a	d	g	j	m	p	t	w
"q	g"	q	a	d	g	j	m	p	t	w
"q	h"	q	a	d	g	j	m	p	t	w
"q	i"	q	a	d	g	j	m	p	t	w
"q	j"	q	a	d	g	j	m	p	t	w
"q	k"	q	a	d	g	j	m	p	t	w
"q	l"	q	a	d	g	j	m	p	t	w

FIG. 10 L Page 25 of 37  
17.3423 43

FIG. 10 M Page 26 of 37  
M-3423 us

"_	"_	1	2	3	4	5	6	7	8	9
"r	w"	q	a	d	i	j	o	p	t	w
"r	x"	q	a	d	g	j	m	p	t	w
"r	y"	q	b	d	i	j	m	p	t	w
"r	z"	q	a	d	g	j	m	p	t	w
"r	"	q	a	d	g	j	m	p	t	w
"s	a"	q	b	d	g	l	m	p	v	y
"s	b"	q	a	d	g	j	m	p	t	w
"s	c"	q	a	d	h	l	o	r	u	w
"s	d"	q	a	d	g	j	n	p	t	w
"s	e"	q	c	e	g	l	n	r	t	y
"s	f"	q	a	e	g	j	m	p	u	w
"s	g"	q	a	e	g	j	m	r	t	w
"s	h"	q	a	e	i	l	o	r	t	w
"s	i"	z	c	d	g	l	n	s	t	x
"s	j"	q	a	d	g	j	m	p	t	w
"s	k"	q	a	e	i	j	m	p	t	w
"s	l"	q	a	e	i	j	o	p	t	y
"s	m"	q	a	e	i	j	o	s	t	w
"s	n"	q	a	e	g	j	m	p	t	w
"s	o"	q	c	f	g	l	m	r	u	w
"s	p"	q	a	e	g	l	o	r	t	w
"s	q"	q	a	d	g	l	m	p	u	w
"s	r"	q	c	d	g	j	m	p	t	w
"s	s"	q	a	e	i	j	o	p	u	w
"s	t"	q	a	e	i	l	o	r	u	y
"s	u"	q	b	e	g	l	m	p	t	w
"s	v"	q	a	e	g	j	m	p	t	w
"s	w"	q	a	e	i	j	o	p	t	w
"s	x"	q	a	d	g	j	m	p	t	w
"s	y"	q	a	d	g	j	m	s	t	w
"s	z"	q	a	d	g	j	m	p	t	w
"s	"	q	a	d	g	j	m	p	t	w
"t	a"	q	c	f	i	l	n	r	t	y
"t	b"	q	a	d	g	j	m	p	t	w
"t	c"	z	a	d	h	j	o	p	t	w
"t	d"	q	a	d	g	j	m	p	t	w
"t	e"	q	c	d	g	l	m	r	u	x

FIG. 10 N Page 27 of 37  
M-3423 us

"-	"-	1	2	3	4	5	6	7	8	9
"t	f"	q	a	d	i	j	o	p	t	w
"t	g"	q	a	e	g	j	o	p	t	w
"t	h"	q	a	e	i	l	o	r	u	w
"t	i"	z	c	e	g	l	o	s	v	w
"t	j"	q	a	d	g	j	m	p	t	w
"t	k"	q	a	e	g	j	m	p	t	w
"t	l"	q	a	e	i	j	m	p	t	y
"t	m"	q	a	e	g	l	o	p	t	w
"t	n"	q	a	e	g	j	m	p	t	w
"t	o"	q	c	d	g	l	m	r	u	w
"t	p"	q	c	d	g	j	m	p	u	w
"t	q"	q	a	d	g	j	m	p	t	w
"t	r"	q	a	e	i	j	o	p	u	y
"t	s"	q	c	e	i	j	o	p	u	w
"t	t"	q	a	e	i	l	o	p	t	y
"t	u"	q	a	f	i	j	n	r	t	w
"t	v"	q	a	d	g	j	m	p	t	w
"t	w"	q	a	e	i	j	o	p	t	w
"t	x"	q	a	d	g	j	m	p	t	w
"t	y"	q	a	d	g	l	m	p	t	w
"t	z"	q	a	d	g	j	m	p	t	w
"t	"	q	a	d	g	j	m	p	t	w
"u	a"	q	a	d	g	l	n	r	t	w
"u	b"	q	a	e	i	j	m	s	t	w
"u	c"	q	c	e	h	k	m	p	t	w
"u	d"	q	a	e	i	j	o	p	t	y
"u	e"	q	a	d	g	j	n	s	t	w
"u	f"	q	a	f	g	j	m	p	t	w
"u	g"	q	a	e	h	j	m	s	t	w
"u	h"	q	a	d	g	j	m	p	t	w
"u	i"	q	c	d	g	l	n	r	t	w
"u	j"	q	a	d	g	j	m	p	t	w
"u	k"	q	a	d	g	j	m	p	t	w
"u	l"	q	a	d	g	l	m	p	t	y
"u	m"	q	b	e	i	j	m	p	t	w
"u	n"	q	c	d	i	l	n	s	t	w
"u	o"	q	a	d	g	j	m	p	t	w

"_	"	1	2	3	4	5	6	7	8	9
"u	p"	q	a	d	i	l	o	p	t	y
"u	q"	q	a	d	g	j	m	p	t	w
"u	r"	q	c	e	i	l	n	s	t	y
"u	s"	q	a	e	i	l	m	s	t	y
"u	t"	q	a	e	i	l	o	s	t	w
"u	u"	q	c	d	g	j	m	p	t	w
"u	v"	q	a	d	g	j	m	p	t	w
"u	w"	q	a	d	g	j	m	p	t	w
"u	x"	q	a	d	g	j	m	p	t	w
"u	y"	q	a	e	g	j	m	s	t	w
"u	z"	q	a	d	g	j	m	p	t	w
"u	"	q	a	d	g	j	m	p	t	w
"v	a"	q	c	d	i	l	n	r	t	w
"v	b"	q	a	d	g	j	m	p	t	w
"v	c"	q	a	d	g	j	m	s	t	w
"v	d"	q	a	d	g	j	m	p	t	w
"v	e"	q	a	d	g	l	n	r	t	w
"v	f"	q	a	d	g	j	m	p	t	w
"v	g"	q	a	d	g	j	m	p	t	w
"v	h"	q	a	d	g	j	m	p	t	w
"v	i"	q	c	e	g	j	n	s	t	w
"v	j"	q	a	d	g	j	m	p	t	w
"v	k"	q	a	d	g	j	m	p	t	w
"v	l"	q	a	d	g	j	m	s	t	w
"v	m"	q	a	d	g	j	m	p	t	w
"v	n"	q	a	d	g	j	m	p	t	w
"v	o"	q	a	d	i	l	o	r	t	w
"v	p"	q	a	d	g	j	m	p	t	w
"v	q"	q	a	d	g	j	m	p	t	w
"v	r"	q	a	d	g	j	m	p	t	w
"v	s"	q	a	d	g	j	m	p	t	w
"v	t"	q	a	d	g	j	m	p	t	w
"v	u"	q	a	d	g	j	m	p	t	w
"v	v"	q	a	d	g	j	m	p	t	w
"v	w"	q	a	d	g	j	m	p	t	w
"v	x"	q	a	d	g	j	m	p	t	w
"v	y"	q	a	d	g	j	m	p	t	w

FIG. 10 P Page 29 of 37  
 17.3423 us

"-	-"	1	2	3	4	5	6	7	8	9
"v	z"	q	a	d	g	j	m	p	t	w
"v	"	q	a	d	g	j	m	p	t	w
"w	a"	q	b	d	i	l	n	r	v	y
"w	b"	q	a	d	g	j	m	p	t	w
"w	c"	q	a	e	g	j	m	p	t	w
"w	d"	q	a	f	g	j	m	p	t	w
"w	e"	q	b	e	i	l	n	r	v	w
"w	f"	q	a	d	g	j	m	p	t	w
"w	g"	q	a	d	g	j	m	p	t	w
"w	h"	q	a	e	i	j	o	p	t	y
"w	i"	q	c	d	g	l	n	s	t	w
"w	j"	q	a	d	g	j	m	p	t	w
"w	k"	q	a	d	g	j	m	p	t	w
"w	l"	q	a	d	g	j	m	p	t	w
"w	m"	q	a	d	g	j	m	p	t	w
"w	n"	q	a	d	g	l	m	s	t	w
"w	o"	q	a	d	g	j	n	r	u	w
"w	p"	q	a	d	h	j	m	p	t	w
"w	q"	q	a	d	g	j	m	p	t	w
"w	r"	q	a	d	i	j	o	p	t	w
"w	s"	q	a	e	g	j	m	p	t	w
"w	t"	q	a	d	g	j	m	p	t	w
"w	u"	q	a	d	g	j	m	p	t	w
"w	v"	q	a	d	g	j	m	p	t	w
"w	w"	q	a	d	g	j	m	p	t	w
"w	x"	q	a	d	g	j	m	p	t	w
"w	y"	q	a	d	g	j	m	p	t	w
"w	z"	q	a	d	g	j	m	p	t	w
"w	"	q	a	d	g	j	m	p	t	w
"x	a"	q	c	d	g	j	m	p	t	w
"x	b"	q	a	d	g	j	m	p	t	w
"x	c"	q	a	e	h	j	m	p	t	w
"x	d"	q	a	d	g	j	m	p	t	w
"x	e"	q	c	d	g	l	m	s	t	x
"x	f"	q	a	d	g	j	m	p	t	w
"x	g"	q	a	d	g	j	m	p	t	w
"x	h"	q	a	d	g	j	m	p	t	w

FIG. 10 Q Page 30 of 37  
H-3423 us

"_	"	1	2	3	4	5	6	7	8	9
"x	i"	q	c	d	g	j	n	s	t	w
"x	j"	q	a	d	g	j	m	p	t	w
"x	k"	q	a	d	g	j	m	p	t	w
"x	l"	q	a	d	i	j	m	p	t	w
"x	m"	q	a	d	g	j	m	p	t	w
"x	n"	q	a	d	g	j	m	p	t	w
"x	o"	q	a	d	g	j	m	p	t	w
"x	p"	q	a	e	i	l	o	p	t	w
"x	q"	q	a	d	g	j	m	p	t	w
"x	r"	q	a	d	g	j	m	p	t	w
"x	s"	q	a	e	i	j	m	p	t	w
"x	t"	q	a	e	g	j	m	r	u	w
"x	u"	q	a	d	g	j	m	p	t	w
"x	v"	q	a	d	g	j	m	p	t	w
"x	w"	q	a	d	g	j	m	p	t	w
"x	x"	q	a	d	g	j	m	p	t	w
"x	y"	z	a	d	g	j	m	p	t	w
"x	z"	q	a	d	g	j	m	p	t	w
"x	"	q	a	d	g	j	m	p	t	w
"y	a"	q	a	d	g	j	m	p	t	w
"y	b"	q	a	e	i	j	o	p	t	w
"y	c"	q	a	d	g	l	o	p	t	w
"y	d"	q	a	d	g	j	m	p	t	w
"y	e"	q	a	e	g	j	m	s	t	w
"y	f"	q	a	d	g	j	m	p	t	w
"y	g"	q	a	d	g	j	m	p	t	w
"y	h"	q	a	d	g	j	o	p	t	w
"y	i"	q	c	d	g	j	n	p	t	w
"y	j"	q	a	d	g	j	m	p	t	w
"y	k"	q	a	d	g	j	m	p	t	w
"y	l"	q	a	e	g	j	m	p	t	w
"y	m"	q	a	e	g	j	o	p	t	w
"y	n"	q	c	d	g	j	m	p	t	x
"y	o"	q	a	d	g	j	n	r	u	w
"y	p"	q	a	e	i	j	m	p	t	w
"y	q"	q	a	d	g	j	m	p	t	w
"y	r"	q	a	d	i	j	m	p	t	w

FIG. 10 R Page 31 of 37  
M 3423 US



"-	-"	1	2	3	4	5	6	7	8	9
"y	s"	q	c	e	i	j	m	p	t	w
"y	t"	q	a	e	h	j	m	p	t	w
"y	u"	q	a	d	g	k	m	r	t	w
"y	v"	q	a	d	g	j	m	p	t	w
"y	w"	q	a	d	h	j	m	p	t	w
"y	x"	q	a	d	g	j	m	p	t	w
"y	y"	q	a	d	g	j	m	p	t	w
"y	z"	q	a	e	g	j	m	p	t	w
"y	"	q	a	d	g	j	m	p	t	w
"z	a"	q	a	d	g	j	m	p	t	w
"z	b"	q	a	d	g	j	m	p	t	w
"z	c"	q	a	d	g	j	m	p	t	w
"z	d"	q	a	d	g	j	m	p	t	w
"z	e"	q	a	d	g	j	n	r	t	w
"z	f"	q	a	d	g	j	m	p	t	w
"z	g"	q	a	d	g	j	m	p	t	w
"z	h"	q	a	d	g	j	m	p	t	w
"z	i"	q	a	d	g	j	n	p	t	w
"z	j"	q	a	d	g	j	m	p	t	w
"z	k"	q	a	d	g	j	m	p	t	w
"z	l"	q	a	d	g	j	m	p	t	w
"z	m"	q	a	d	g	j	m	p	t	w
"z	n"	q	a	e	g	j	m	p	t	w
"z	o"	q	a	d	g	j	n	p	t	w
"z	p"	q	a	d	g	j	m	p	t	w
"z	q"	q	a	d	g	j	m	p	t	w
"z	r"	q	a	d	g	j	m	p	t	w
"z	s"	q	a	d	g	j	m	p	t	w
"z	t"	q	a	d	g	j	m	p	t	w
"z	u"	q	a	d	g	j	m	p	t	w
"z	v"	q	a	d	g	j	m	p	t	w
"z	w"	q	a	d	g	j	m	p	t	w
"z	x"	q	a	d	g	j	m	p	t	w
"z	y"	q	a	d	g	j	m	p	t	w
"z	z"	q	a	d	g	j	m	p	t	w
"z	"	q	a	d	g	j	m	p	t	w
"	a"	q	c	d	i	l	n	r	t	w

FIG. 10 S Page 32 of 37  
17-3423 US

"_	_"	1	2	3	4	5	6	7	8	9
"	b"	q	a	e	i	l	o	r	u	y
"	c"	q	a	e	h	l	o	r	u	y
"	d"	q	a	e	i	j	o	r	u	w
"	e"	q	a	d	i	l	n	s	v	x
"	f"	q	a	e	i	l	o	r	u	w
"	g"	q	a	e	i	l	o	r	u	w
"	h"	q	a	e	i	j	o	p	t	w
"	i"	q	c	f	g	j	n	s	t	w
"	j"	q	a	e	g	j	o	p	u	w
"	k"	q	b	e	i	j	n	p	t	w
"	l"	q	a	e	i	l	o	p	u	y
"	m"	q	a	e	i	k	o	s	u	y
"	n"	q	a	e	i	j	o	p	u	w
"	o"	z	b	f	g	k	n	r	u	w
"	p"	q	a	e	h	l	o	r	u	w
"	q"	z	a	d	g	j	m	p	u	w
"	r"	q	a	e	i	j	o	s	u	w
"	s"	q	c	e	h	l	o	p	t	y
"	t"	q	a	e	h	j	o	r	u	w
"	u"	q	a	d	i	k	n	s	t	w
"	v"	q	a	e	i	l	o	p	t	w
"	w"	q	a	e	i	j	o	r	t	w
"	x"	q	a	d	g	j	m	p	t	y
"	y"	q	a	e	i	j	o	p	u	w
"	z"	q	a	e	i	j	o	p	t	y
"	"	q	a	f	i	l	o	s	t	w

FIG. 10 T Page 33 of 37  
N. 3423 us

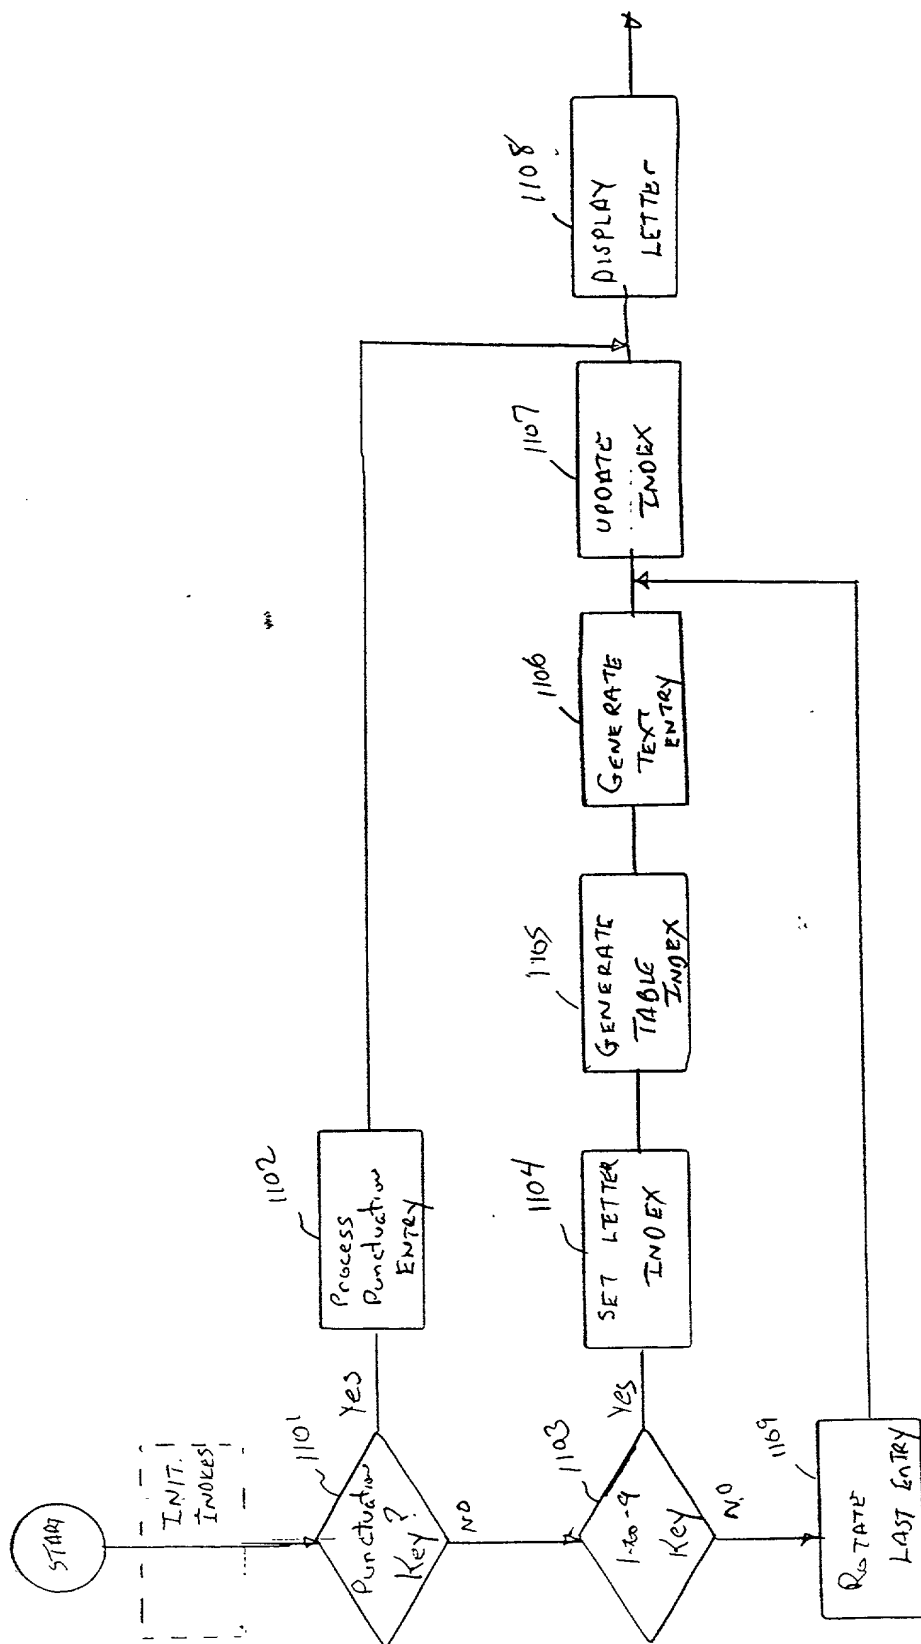


Fig. 11.

1100

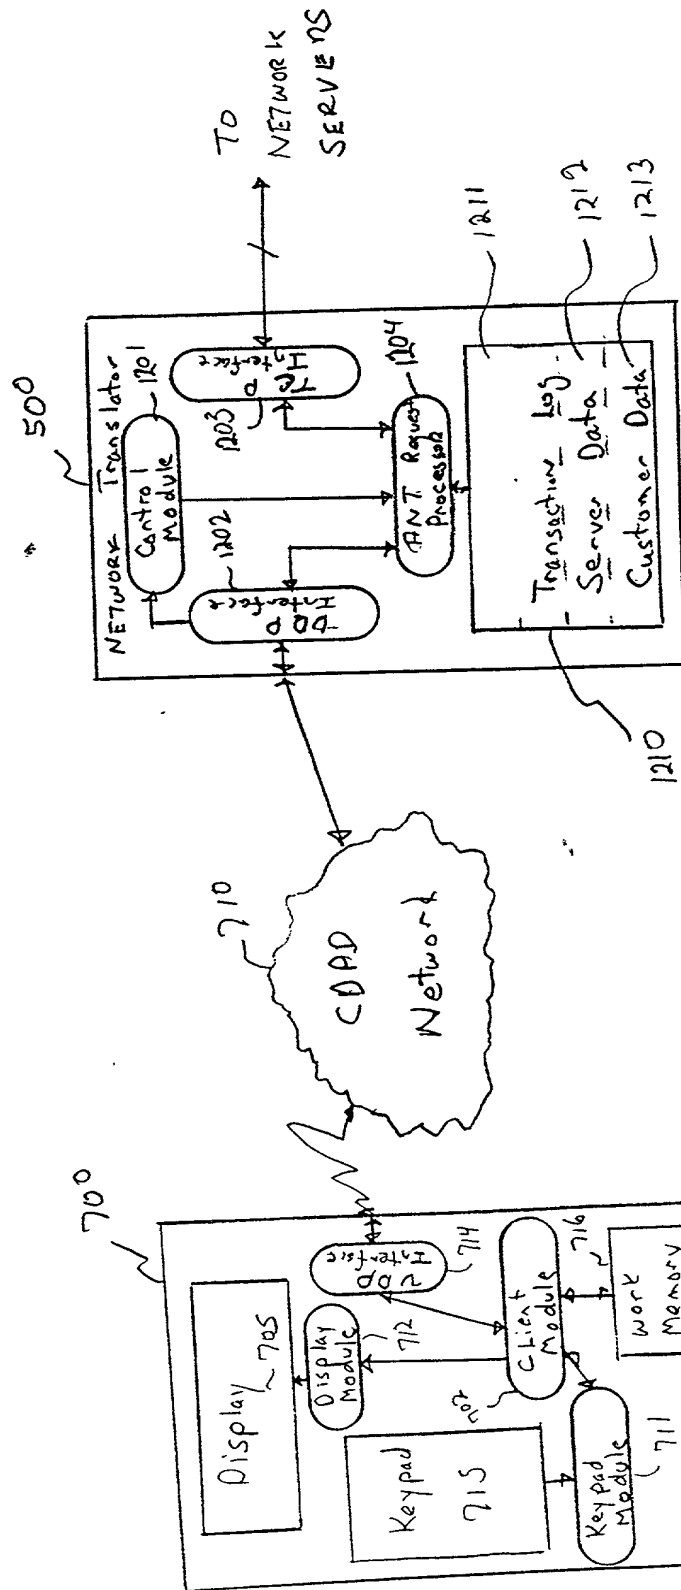


Fig 12

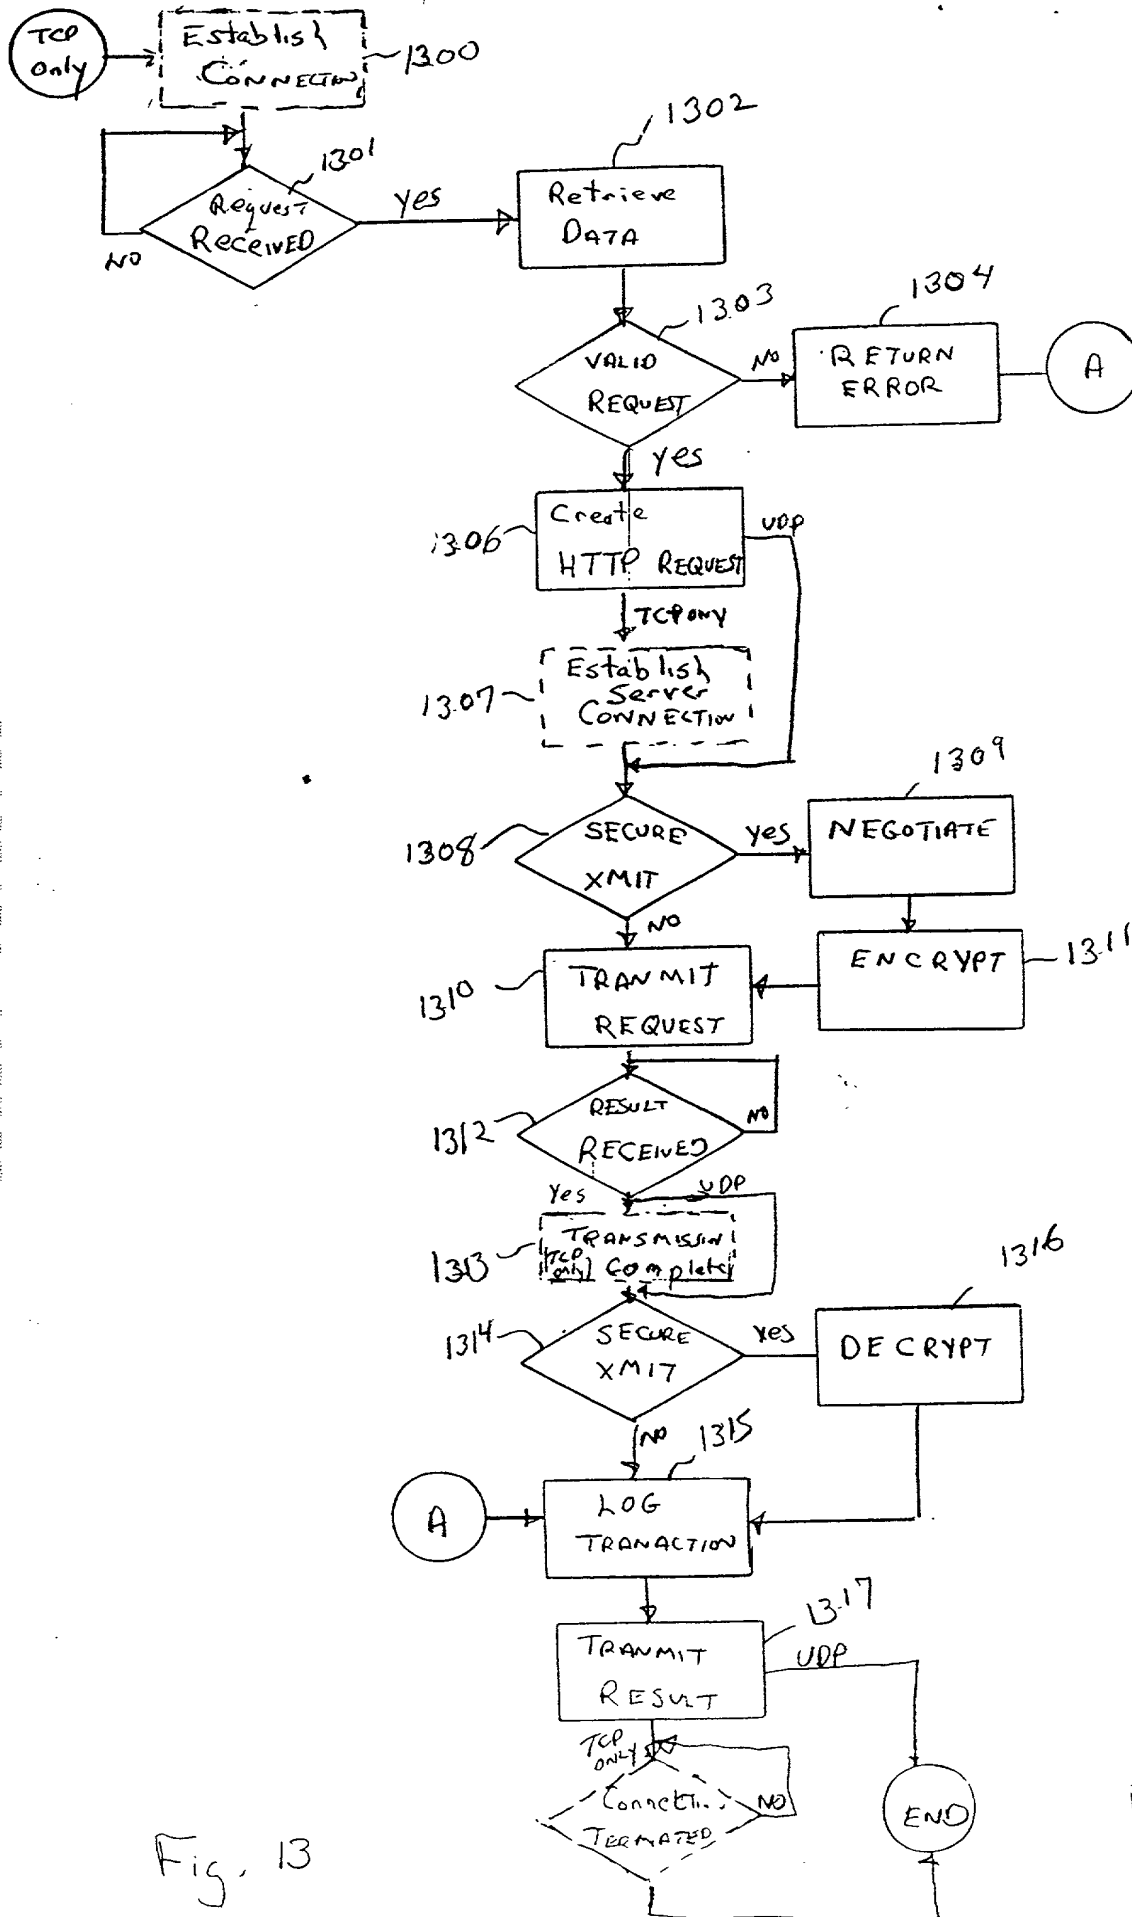


Fig. 13

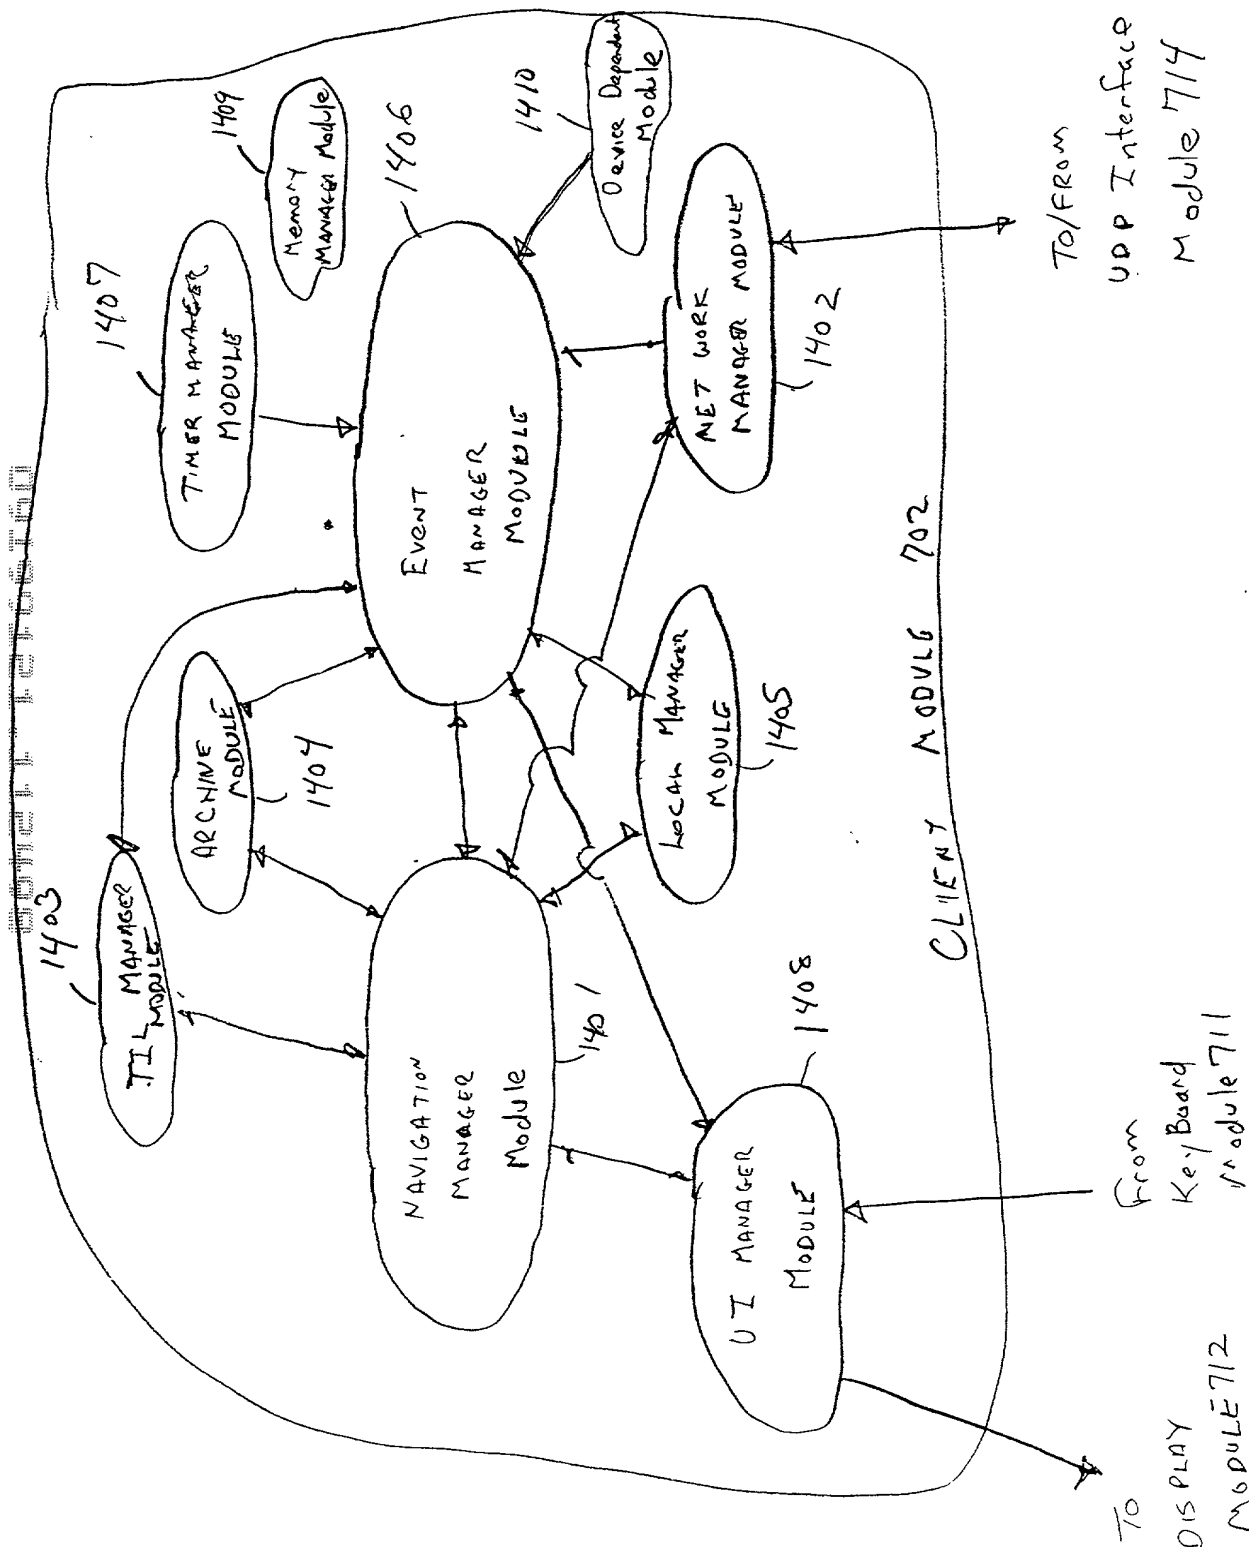


Fig 14

## DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of subject matter (process, machine, manufacture, or composition of matter, or an improvement thereof) which is claimed and for which a patent is sought by way of the application entitled "A METHOD AND ARCHITECTURE FOR AN INTERACTIVE TWO-WAY DATA COMMUNICATION NETWORK"

which (check) ☐ is attached hereto.  
☐ and is amended by the Preliminary Amendment attached hereto.  
☒ was filed on December 11, 1995 as  
 Application Serial No. 08/570,210  
☐ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information known to me to be material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
			Yes	No
<u>N/A</u>				
(Number)	(Country)	(Day/Month/Year Filed)		
<u> </u>	<u> </u>	<u> </u>	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)		
<u> </u>	<u> </u>	<u> </u>	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as any subject matter of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>N/A</u>		
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
<u> </u>	<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith:

Alan H. MacPherson (24,423); Thomas S. MacDonald (17,774); Richard Franklin (19,128); Kenneth E. Leeds (30,566); Paul J. Winters (25,246); Brian D. Ogonowsky (31,988); David W. Heid (25,875); Guy W. Shoup (26,805); Forrest E. Gunnison (32,899); Norman R. Klivans (33,003); Edward C. Kwok (33,938); Patrick T. Bever (33,834); David E. Steuber (25,557); Michael Shenker (34,250); Laura Terlizzi (31,307); T. Lester Wallace (34,748); Ronald J. Meetin (29,089); Andrew C. Graham (36,531); Ken John Koestner (33,004); Stephen A. Terrile (32,946); Omkar K. Suryadevara (36,320); David T. Millers (37,396); E. Eric Hoffman (38,186); Kent B. Chambers (38,839); Emily M. Haliday (38,903); William L. Paradice, III (38,990); Arthur J. Behiel (39,603); Serge J. Hodgson (40,017); and David W. O'Brien (40,107).

Address all correspondence and telephone calls to:

Forrest E. Gunnison  
Attorney for Applicant(s)  
SKJERVEN, MORRILL, MacPHERSON, FRANKLIN & FRIEL  
25 Metro Drive, Suite 700  
San Jose, California 95110-1349

Telephone: 408-453-9200  
Facsimile: 408-453-7979

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Alain Rossmann

Inventor's signature [Signature]

Date 3/28/56 X

Residence Menlo Park, California

Citizenship France

Post Office Address 664 Newell Road

Palo Alto, CA 94303

CANNED 10